


10.70


.XX ±0.13


.XXX ±0.05



## NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:	THERMOPLASTIC POLYESTER, UL94V-0 STEEL, TIN PLATED COPPER ALLOY, GOLD FLASH PLATED
OPERATING TEMPERATURE:	-55°C ~ 125°C
POWER/CO-AX CONTACT RATING: (IF PRESENT)	40A (CURRENT)
SIGNAL CONTACT CURRENT RATING	: 5A PER CONTACT
SIGNAL CONTACT RESISTANCE:	10mΩ MAX.
INSULATOR RESISTANCE:	5000MΩ min.
DIELECTRIC	
WITHSTANDING VOLTAGE:	1000V AC rms

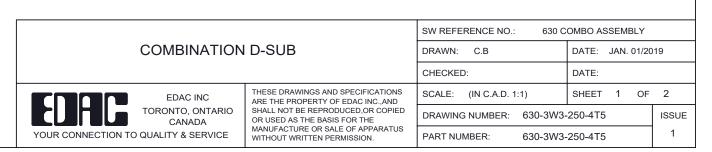



THIS SERIES FULLY CONFORMS TO

THE EUROPEAN UNION DIRECTIVES

2011/65/EU FOR RoHS COMPLIANCY.

-

COMPLIANT

