

### **Mounting Option**

07-M3-0.5 Metric Threaded Inserts

#### **Contact Detail**

500-Wire Hole .050x.025(1.27x0.64) - Tail LG=.260(6.60) .156 [3.96] Contact Spacing x .200 [5.08] Row Spacing

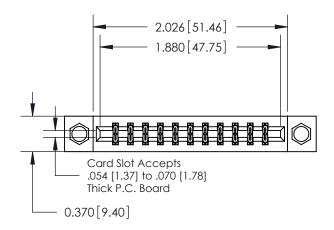

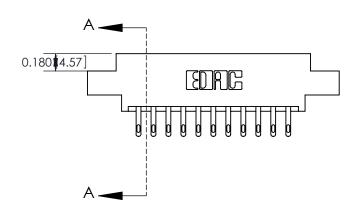

# **See Accompanying Pages for:**

- **Contact Bend Details**
- **Mounting Options**
- **Features and Specifications**



|                               | 0.330[8.38]<br>Card Slot |
|-------------------------------|--------------------------|
| .160 [4.06] Point of Contact— |                          |
|                               |                          |
|                               |                          |
|                               | SECTION A-A              |

| 837 Series High Temp Card Edge Connector |
|--|
| Part Number: 887-022-500-807             |



|   | DRAWN: J.LEE   | DATE: <b>OCT. 06/09</b> |  |  |
|---|----------------|-------------------------|--|--|
|   | CHECKED:       | DATE:                   |  |  |
|   | SCALE: NTS     | SHEET 1 OF 4            |  |  |
| D | DRAWING NUMBER | ISSUE                   |  |  |

ACAD REFERENCE NO. 837 ENG MASTER

837 Assembly

THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER

ISSUE NUMBE

ORIGINAL

1



| 837 Series High Temp Card Edge Connector<br>Contact Bend Detail |   | ACAD REFERENCE NO. 837 ENG MASTER |                  |        |  |  |
|---|---|-----------------------------------|------------------|--------|--|--|
|   |   | DRAWN: J.LEE                      | DATE: OCT. 06/09 |        |  |  |
|   |   | CHECKED:                          | DATE:            |        |  |  |
|   | THESE DRAWINGS AND SPECIFICATIONS           | SCALE: NTS                        | SHEET :          | 2 OF 4 |  |  |
| TORONTO, ONTARIO  | , or the total be the tropodes, or don't be | DRAWING NUMBER                    | •                | ISSUE  |  |  |
| YOUR CONNECTION TO QUALITY & SERVICE                            | MANUFACTURE OR SALE OF APPARATUS            | 837 Assembly                      |                  | 1      |  |  |





## **Features**

- CSA Approved and UL Recognized
- .156 (3.96) Contact Spacing x .200 (5.08) Row Spacing
- Accepts .062 (1.57) Nominal Thickness P.C. Board
- High Profile Insulator Body .600 (15.24)
- Contact Termination Options include P.C. Tail, Wire Hole, Wire Wrap, 90 Degree & Extender Board Bends
- Single or Dual Row Configurations
- Large Variety of Mounting Options, Flush or Offset Lugs
- Pre-assembled Card Guides Available
- Accepts Between Contact and In-Contact Polarizing Keys

## **Specifications**

- Insulator Material: DAP
- Contact Material: Copper, Nickel, Tin Alloy CA-725
- Contact Plating: Gold on the Mating Area, Tin on the Contact Tails, Nickel Underplate
- Current Rating: 3 Amperes Continuous
- Contact Resistance: 10 Milliohms Maximum
- Dielectric Withstanding Voltage: 1800 V AC rms at Sea Level Between Adjacent Contacts
- Insulation Resistance: 5000 Megohms Minimum
- Operating Temperature: -65 to +165 Degrees C
- Insertion Force: 16 oz (4.45 N) Maximum per Contact Pair when Tested with a .070 (1.78) Thick Gauge
- Withdrawal Force: 1 oz (0.28 N) Minimum per Contact Pair when Tested with a .054 (1.37) Thick Gauge

|  | 837 Series High Temp Card Edge Connector<br>Features and Specifications |   | ACAD REFERENCE NO. 837 ENG MASTER |             |          |           |
|--|---|---|-----------------------------------|-------------|----------|-----------|
|  |   |   | DRAWN:                            | J.LEE       | DATE: OC | CT. 06/09 |
|  |   |   | CHECKED:                          |             | DATE:    |           |
|  |   | ARE THE PROPERTY OF EDAC INC., AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS | SCALE:                            | NTS         | SHEET .  | 4 OF 4    |
|  | TORONTO, ONTARIO  |   | DRAWING                           | NUMBER      |          | ISSUE     |
|  | YOUR CONNECTION TO QUALITY & SERVICE                                    |   | 8                                 | 37 Assembly |          | 1         |