
T	۵	п	m	<u>с</u>







LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

ယ

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 21

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : W = Olive drab Cadmium

-Standard : Based on MIL-DTL-38999 Series III

	-Shell Material	: Aluminium			
	-Shell Plating	: Olive drab Cadmium			
	-Insulator	: Thermoplastic			
	-Contacts	: Copper Alloy			
	-Seals & Grommet	: Silicon Elastomer			
	-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum			
	-Durability	: 500 Mating cycles			
-Delivered with Souriau contacts and Accessories					
	-Temperature Range	_∶ -65°C to +175°C			
	-Salt Spray	: 500 hours			

: 43.39 g ± 10%

8D 0

G

21

W

48

Ρ


F

D

Connector dimension					
Dim	Nominal				
Р	3.25±0.2				
PP	4.93±0.2				
R1	31.75				
R2	29.36				
S	39.7±0.3				
V	20.07+0/-1.25				
W	2.1/3.2				
Z	31.5 Max				
VV THREAD	M31x1-6g				

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recommend

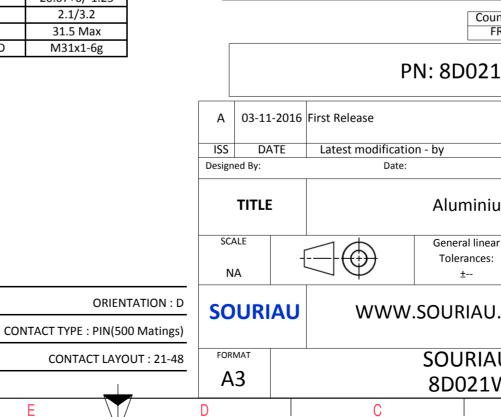

Φ		
		4
AS EXAMPLE		3
any non-conforming which does not co er of the Parties or I adation, technical n untry Jurisc FR 1W48PD	mply with by a third party	2
		10D N°
	CUSTOMER DRAWING	
um Receptac	le 8D series	
ar :	NPRDS / PROJECT 859	1
I.COM	This document is the property SOURIAU it must not be reproduced or communicated without permissi	of
U DRG N°		SHEET
W48PD-C	A	1/2
5		

		G	н т	т	D		0	
		Contact Layout				S	QUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING	Panel Cute
4	*					ά		_
	Ctc A B	4#8 Power 21-48 X Y 4.57 4.57 4.57 -4.57				¥ (ØA	T
ىن	C D	4.57 -4.57 -4.57 -4.57 -4.57 4.57					Dir ØJ ØA R1 Ø	A A
	-						SOURIAU shall not be due to a use of the the Specifications issue (professional re	Products v d by either
22								Coun FR 3D021
					A	03-11-2016	5 First Release	
					ISS Design	DATE ed By:	Latest modification - by Date:	
						TITLE		luminiu
<u> </u>					SC/			neral linear olerances: ±

F

Е

G

Н

SOURIAU	WWW.SOURIAU.

				_
FORMAT			SOU	RIAL
A3			8D0)21W
D		С		

