

TOLERANCE UNLESS OTHERWISE SPECIFIED .X ±0.25 .XX ±0.13 .XXX ±0.10


THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.




ISSUE NUMBER	
ORIGINAL	(1)

3.18 ±0.38 5.00 ±0.25

6.0



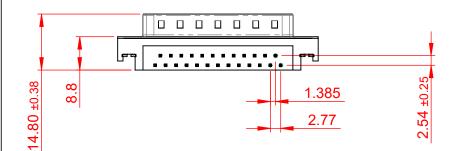

NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, NICKEL PLATED COPPER ALLOY, 30µ GOLD PLATING

OPERATING TEMPERATURE: -55°C TO +85°C

CURRENT RATING: 3A PER CONTACT CONTACT RESISTANCE: $25m\Omega$ MAX. **INSULATOR RESISTANCE:** 5000MΩ min. DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC rms

623 SERIES D-SUB CONNECTOR		SW REFERENCE NO.: 623 ASSEMBLY					
		DRAWN: C.B		DATE: AUG. 01/2018			
		CHECKED:		DATE:			
EDAC INC TORONTO, ONTARIO CANADA ECTION TO QUALITY & SERVICE	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	SCALE: 1:1		SHEET	1 OF	1	
		DRAWING NUMBER:	623-025-6	661-032		ISSUE	
		PART NUMBER:	623-025-6	661-032		1	



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

