

TOLERANCE UNLESS OTHERWISE SPECIFICIES DO NOT MAKE MANUAL REVISIONS TO MASTER.




ISSUE NUMBER	
ORIGINAL	

(1)







NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, TIN PLATED COPPER ALLOY, GOLD FLASH PLATED


OPERATING TEMPERATURE:

.X ±0.25 .XX ±0.13

.XX ±0.13 .XXX ±0.05

POWER/CO-AX CONTACT RATING:40A (CURRENT)(IF PRESENT)SIGNAL CONTACT CURRENT RATING:5A PER CONTACTSIGNAL CONTACT RESISTANCE:10mΩ MAX.INSULATOR RESISTANCE:5000MΩ min.

INSULATOR RESISTANCE: DIELECTRIC WITHSTANDING VOLTAGE:

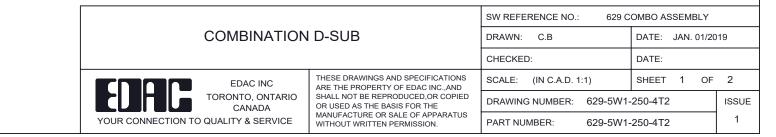

-55°C ~ 125°C

1000V AC rms



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

