


.X ±0.25 .XX ±0.13


.XXX ±0.05


10.70

5.80








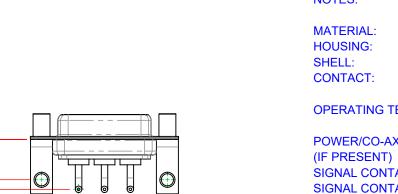



| MATERIAL: HOUSING: SHELL: CONTACT: | THERMOPLASTIC POLYESTER, UL94V-0 STEEL, NICKEL PLATED COPPER ALLOY, GOLD FLASH PLATED |
|--|---|
| OPERATING TEMPERATURE: | -55°C ~ 125°C |
| POWER/CO-AX CONTACT RATING: (IF PRESENT) | 10A (CURRENT) |
| SIGNAL CONTACT CURRENT RATING: SIGNAL CONTACT RESISTANCE: | 5A PER CONTACT 10mΩ MAX. |
| INSULATOR RESISTANCE: | 5000MΩ min. |
| DIELECTRIC WITHSTANDING VOLTAGE: | 1000V AC rms |

| | COMBINATION D-SUB | | SW REFERENCE NO.: 630 COMBO ASSEMBLY | | |
|--|--------------------------------------|--|--------------------------------------|------------------|-------|
| | | | DRAWN: C.B | DATE: JAN. 01/20 | 19 |
| | | | | DATE: | |
| | EDAC INC | THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND | SCALE: (IN C.A.D. 1:1) | SHEET 1 OF | 2 |
| | TORONTO, ONTARIO CANADA | SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE | DRAWING NUMBER: 630-3W3-240-1NE IS | | ISSUE |
| | YOUR CONNECTION TO QUALITY & SERVICE | MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION. | PART NUMBER: 630-3W3 | -240-1NE | 1 |





THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

