т	۵ D	н <b>т</b>		0







LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 11

PLATING : F = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

 $\sim$ 

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material : Aluminium : Nickel -Shell Plating -Insulator : Thermoplastic -Contacts : Copper Alloy : Silicon Elastomer -Seals & Grommet -Contact Plating : Gold over copper Alloy 0.8µm minimum -Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories : -65°C to +200°C -Temperature Range -Salt Spray : 48 hours -Mass : 14.89 g ± 10%

8D 0

G

11

F

04

В

F

Ν

Dim         Nomi           P         3.25±           PP         4.93±           R1         20.6           R2         18.2           S         26.2±	0.2 0.2
PP         4.93±           R1         20.6           R2         18.2	0.2
R1 20.6 R2 18.2	-
R2 18.2	52
S 26.2+	6
	0.3
V 20.83+0	/-1.25
W 2.1/2	2.5
Z 31.5 M	Лах
VV THREAD M15x1	L-6g


ORIENTATION : N

CONTACT LAYOUT : 11-04

CONTACT TYPE : SOCKET(500 Matings)

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recommend

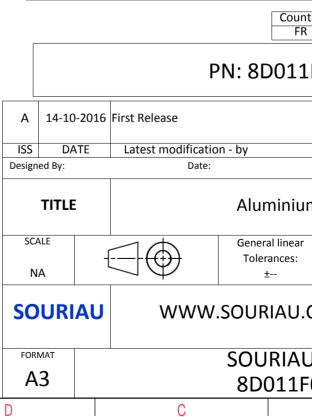

Ξ		Þ			
			4		
AS EXAMPLE			3		
r any non-conformi s which does not co er of the Parties or indation, technical r	omply with by a third party				
Intry Juriso FR	Not Listed		2		
1F04BN					
		MOD N°			
	CUSTOMER DRAV				
um Receptacle 8D series					
ar :	NPRDS / PROJE <b>859</b>	СТ	1		
COM This document is the property of SOURIAU it must not be reproduced or communicated without permission					
U DRG N°		SHEET			
F04BN-C		A	J		
_	·				

r	Ŧ	۵	п П	m	D	0
		Contact Layout				Panel Cutou
4	- <u>×</u>	$ \begin{array}{c}                                     $			A	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
	Shell Arrangement Numt size Numt 11 -4 4	X-axis (mm)         Y-axis (mm)           +.065 (1.65)         .065 (1.65)           +.065 (1.65)         .065 (1.65)          065 (1.65)         .065 (1.65)          065 (1.65)         .065 (1.65)          065 (1.65)         .065 (1.65)          065 (1.65)         .065 (1.65)          065 (1.65)         .065 (1.65)          065 (1.65)         .065 (1.65)          065 (1.65)         .065 (1.65)          065 (1.65)         .065 (1.65)          065 (1.65)         .065 (1.65)          065 (1.65)         .065 (1.65)          065 (1.65)         .065 (1.65)	]		8	ØT ØA
ω						Dim ØA ØAA R1 ØT
	-					SOURIAU shall not be liable for any due to a use of the Products wh the Specifications issued by either of
N						(professional recommendat
					A 14-10-20 ISS DATE Designed By:	016 First Release
_					TITLE SCALE NA	Aluminium General linear Tolerances:
_					SOURIA	
					FORMAT A3	SOURIAU 8D011F0
_	Н	G	F	E	D	C

