т	വ	н т	m	0







LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

ယ

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 11

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : W = Olive drab Cadmium

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium		
-Shell Plating	: Olive drab Cadmium		
-Insulator	: Thermoplastic		
-Contacts	: Copper Alloy		
-Seals & Grommet	: Silicon Elastomer		
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum		
-Durability	: 500 Mating cycles		
-Delivered with Souriau contacts and Accessories			
-Temperature Range	_∶ -65°C to +175°C		
-Salt Spray	: 500 hours		

: 12.01 g ± 10%

8D 0

G

11

W

01

А


F

С

Connector dimension		
Dim	Nominal	
Р	3.25±0.2	
PP	4.93±0.2	
R1	20.62	
R2	18.26	
S	26.2±0.3	
V	20.83+0/-1.25	
W	2.1/2.5	
Z	31.5 Max	
VV THREAD	M15x1-6g	

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recommend

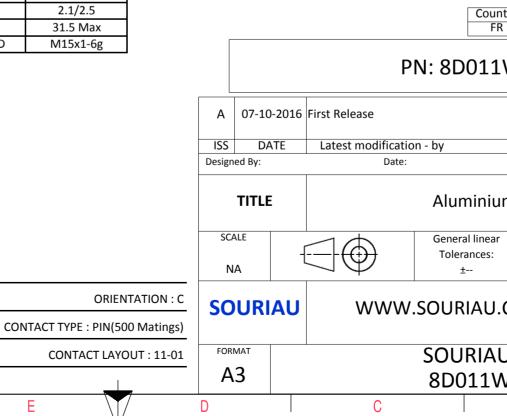

Φ					
		4			
IS EXAMPLE		3			
any non-conformit which does not content of the Parties or b adation, technical not untry Jurisd R 1W01AC	mply with by a third party	2			
	MOD N°				
customer DRAWING					
ar	NPRDS / PROJECT 859				
.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission					
UDRG N° SHEET					
W01AC-C	A				

		۵	нт — — — — — — — — — — — — — — — — — — —	m		0
		Contact Layout				Panel Cutor
4	(01			۲۲ – ۲۲	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
	Ctc A	1#12 11-01 X Y 0 0			<u>v</u>	Dim
ယ			_			ØA ØAA R1 ØT
						SOURIAU shall not be liable for an due to a use of the Products wh the Specifications issued by either o (professional recommendat
2					A 07-10-20	Countr FR PN: 8D011V
					ISS DATE Designed By: TITLE	Latest modification - by Date: Aluminiun
-					SCALE NA SOURIA	General linear Tolerances: ±
					FORMAT A3	SOURIAU 8D011W
·	Н	G	F	E	D	C

