
π Ω <u></u>	m		ດ   ພ			
A Z S S S S S S S S S S S S S S S S S S					4	
	A Contraction of the second se		LAYOUT SHOWN AS EXAMPLE		3	
	ving Shown as example					
CHARACTERISTICS	Connector dimension Dim Nominal					
-Standard : Based on MIL-DTL-38999 Series III -Shell Material : Aluminium	ØS 41.7 Max					
-Shell Plating : Nickel	Z 31 Max		U shall not be liable for any non-conformit o a use of the Products which does not cor			
-Insulator : Thermoplastic	the Creedifications issued by sitting of the Dentice or by a third party.					
-Contacts : Copper Alloy		(t	professional recommendation, technical no	otice.)		
-Seals & Grommet : Silicon Elastomer			Country Jurisd	iction & Control List		
-Contact Plating : Gold over copper Alloy 0.8μm minimum			FR Survey	Not Listed	2	
-Durability : 500 Mating cycles						
-Delivered with Souriau contacts and Accessories		PN: 8D521F41BN				
-Temperature Range : -65°C to +200°C						
-Salt Spray : 48 hours		A 06-10-2016 First Release				
		ISS DATE Latest mod Designed By:	dification - by Date:	CUSTOMER DRAWING	10D N°	
		TITLE Aluminium Plug 8D series				
BASIC SERIES: 8D 5 - 21 F 41 E → SHELL TYPE : Plug with RFI Shielding	3 N	SCALE	General linear Tolerances: ±	NPRDS / PROJECT <b>859</b>	4	
				This document is the property o	of	
CONTACT TYPE : Standard Crimp Contact SHELL SIZE : 21	ORIENTATION : N CONTACT TYPE : SOCKET(500 Matings)	- SOURIAU WWW.SOURIAU.COIVI it must not be reproduced or				
PLATING : F = Nickel	CONTACT LAYOUT : 21-41	FORMAT	SOURIAU DRG N°		SHEET	
		A3	8D521F41BN-C		1/2	
H G F	Ε				,	
				I A		

	т	പ	н <b>п</b>	m		0
		Contact Layout				
4		+Y 7 HOLES				
	<	31 - 337 - 41' - 13 HOLES				
	Ň					
		635 DIA				
			7			
ω	size no. cont	Insert arrangement 21-41           ber of         Size         Service         Contact         Supersedes           tacts         contacts         rating         location         location           11         20         I         All         MS20055-41	_			
			_			
						SOURIAU shall not be liable for
						due to a use of the Products the Specifications issued by eithe
						(professional recommen
						Cou
N						F
						PN: 8D52
						16 First Release
					ISS DATE Designed By:	Latest modification - by Date:
						ماليه
					TITLE	Alum
					SCALE	General linea Tolerances:
<b>→</b>					NA	
					SOURIA	U WWW.SOURIAU
						SOURIA
		<u> </u>	-		A3	8D521
	Н	G	l F	I E	D	C

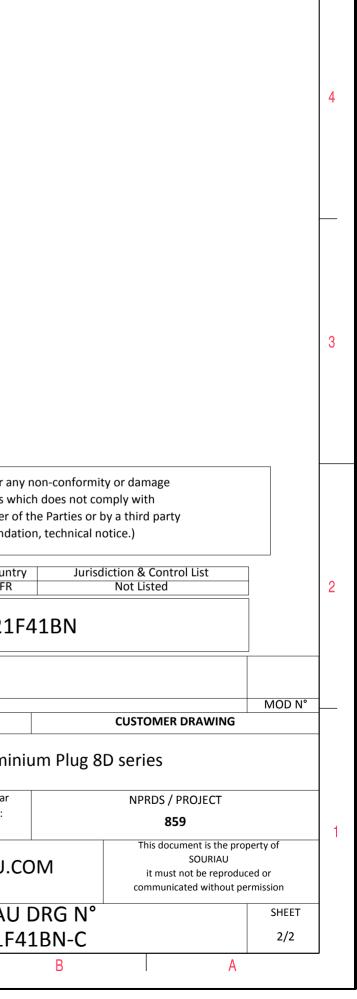

 $\triangleright$ 

σ