

Ŧ	۵	п	m	0



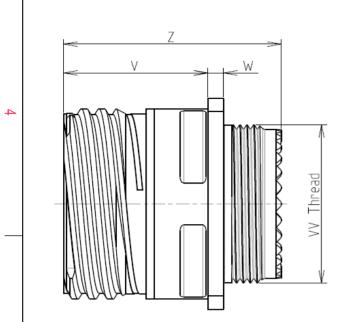

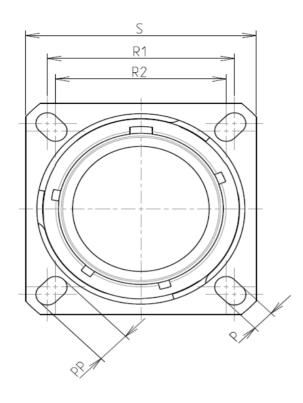

LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

-Mass

BASIC SERIES:

SHELL SIZE : 11

PLATING : S = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

-Standard : Based on MIL-DTL-38999 Series III

	-Shell Material	: Stainless Steel			
	-Shell Plating	: Nickel			
	-Insulator	: Thermoplastic			
	-Contacts	: Copper Alloy			
	-Seals & Grommet	: Silicon Elastomer			
N	-Contact Plating	: Gold over copper Alloy 0.8µm minimum			
	-Durability	: 500 Mating cycles			
	-Delivered with Souriau contacts and Accessories				
	-Temperature Range	<ul> <li>-65°C to +200°C</li> </ul>			
	-Salt Spray	: 500 hours			

: 32.47 g ± 10%

8D 0

G

11

S

01

S

F

А


Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
PP	4.93±0.2		
R1	20.62		
R2	18.26		
S	26.2±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M15x1-6g		

CONTACT TYPE : SOCKET(500 Matings)

Е

CONTACT LAYOUT : 11-01

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recomment

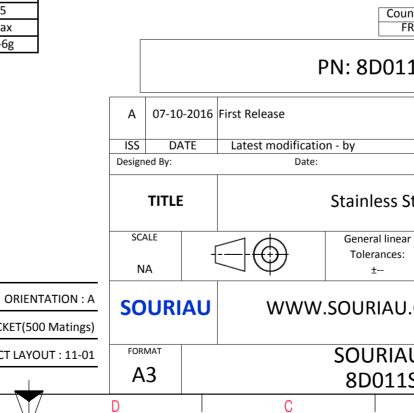

	Φ		A		_
					4
AS EXAM	APLE				3
s which er of the	does not co e Parties or b , technical no Jurisd	y a third part			2
				MOD N°	
Steel	CUSTOMER DRAWING teel Receptacle 8D series NPRDS / PROJECT 859				
.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission					1
	RG N° SA-C			SHEET 1/2	
	B		A		J

	Ξ	۵	<u>п</u>	m		0
		Contact Layout				Panel Cutou
4		01			A	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
	Ctc	1#12 11-01 X Y	-		~ _ ¥	ØT ØT
ယ	A	0 0				Dim ØA ØAA R1 ØT
						SOURIAU shall not be liable for an due to a use of the Products wh
2						the Specifications issued by either of (professional recommendat Countr FR
					A 07-10-20 ISS DATE Designed By:	PN: 8D0119
					SCALE	Stainless Ste
1					NA SOURIAU FORMAT	
					A3	SOURIAU 8D011S0
·	Н	G	F	E	D	C

