


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	50-00112	Connector, dc plug, 3.5x1.35xL18.5 mm, brass nickel plated	1	
2	50-00117	Connector, dc jack, 3.5x1.35xL15 mm, molding style	1	
3	30-00003	Wire, 2C BC, 24 AWG, UL2468, 300V, 80C, 3.6 mm, VW-1, PVC, 76A	1	
4	24-00049	Overmold, PVC, black	1	
5	24-00053	Overmold, PVC, black	1	

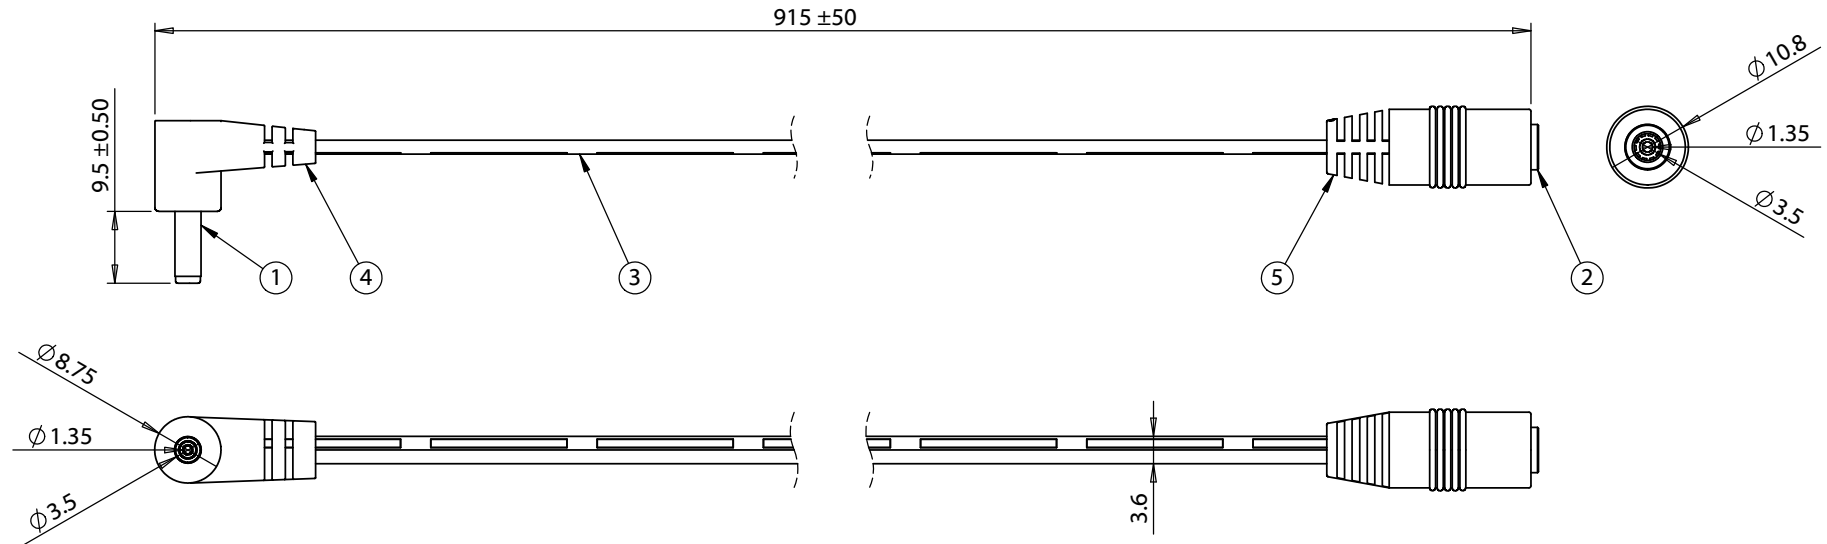

Notes:

Hi-Pot test: 600 Vac, 0.5 mA, 1 second

Wiring Diagram		
50-00112	wire color	50-00117
center	black with stripe	center
sleeve	black	sleeve

Revision:	Date:	Description:	Prepared:	Notes:	<h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</p> <p>Size: Part number: A 053-0388R (CA-2220)</p> <p>Scale: 1:1 Sheet 1 of 1</p>
A	1/19/2009	Re-issue CUI spec as Tensility	GL 2016.03.16 16:05:46 -07'00'	RoHS compliant	
A1	8/31/2011	Updated description, connector, and wire information	Verified: LA	Function test: no open, no short circuit, no intermittent	
A2	6/13/2012	Updated connector description	Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Description: Cable, 915 mm, 3.5x1.35x9.5 mm 90° 50-00112 plug to 3.5x1.35 mm 50-00117 jack, 24 AWG, 30-00003 wire	
A3	8/6/2012	Modified 50-00117 overall length			
A4	10/9/2013	Changed connector to 50-00112			