
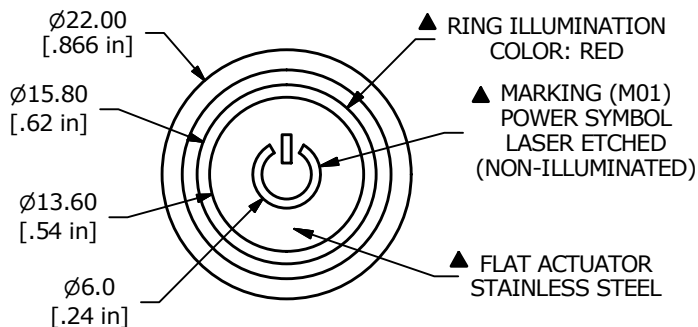



Recommended PANEL CUTOUT  
 MAX. PANEL THICKNESS:  
 11.0 [.43in]

SWITCH FUNCTION	
POS. 1	POS. 2
ON	(ON)
1-3	(1-2)



(ON) = MOMENTARY



▲ RING ILLUMINATION  
 COLOR: RED  
 ▲ MARKING (M01)  
 POWER SYMBOL  
 LASER ETCHED  
 (NON-ILLUMINATED)  
 ▲ FLAT ACTUATOR  
 STAINLESS STEEL

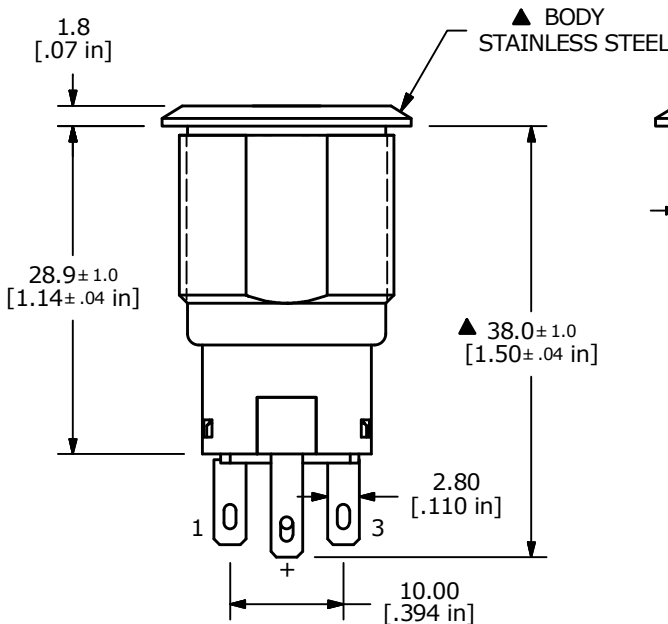

▲ BODY  
 STAINLESS STEEL

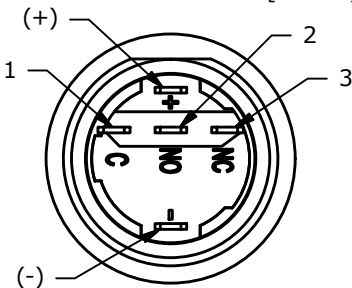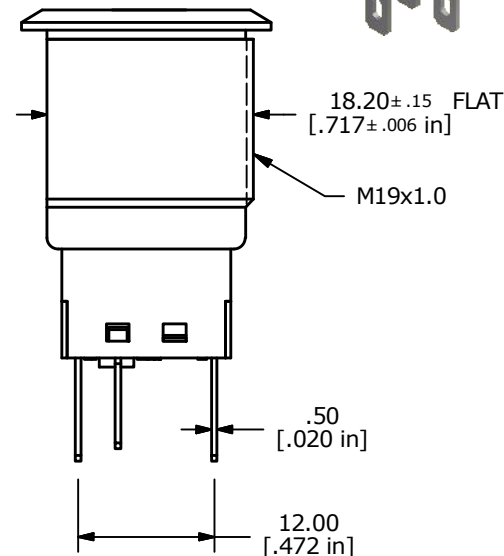

- NOTE:
- ALL DIMENSIONS IN MM [INCH]
  - GENERAL TOLERANCE: X.X = ±0.4  
X.XX = ±0.25
  - TERMINAL NUMBERS FOR REF ONLY
  - CONTACT MATERIAL: SILVER
  - RATING: 2A 24VDC
  - ELECTRIC LIFE: 50,000 MAKE-AND-BREAK CYCLES AT FULL LOAD.
  - INSULATION RESISTANCE: 1,000 MΩ MIN.
  - DIELECTRIC STRENGTH: 2,000 VAC MIN. FOR 1 MINUTE
  - CONTACT RESISTANCE: 50mΩ MAX. @ 1A 12VDC
  - OPERATING TEMP.: -20°C to 55°C
  - TRAVEL: 2.8mm
  - ▲ DENOTES CRITICAL PARAMETER
  - LAMP VOLTAGE: 20mA 1.8V
  - INGRESS PROTECTION: IP65
  - HARDWARE SUPPLIED: O-RING AND HEXNUT



C	23605	UPDATED RATING TO 2A @ 24VDC	10/11/18	MJR
B	22413	DRAWING UPDATES	8/30/16	MW
REV	PCR NO	DESCRIPTION	DATE	BY

TITLE PV4F2B0SS311M01				
SCALE 3:2	DATE 3/26/2012	DR BGL	DWG 52-PV4F2B0SS311M01	REV C

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED