


PCB LAYOUT FOR SINGLE SIDE MOUNT

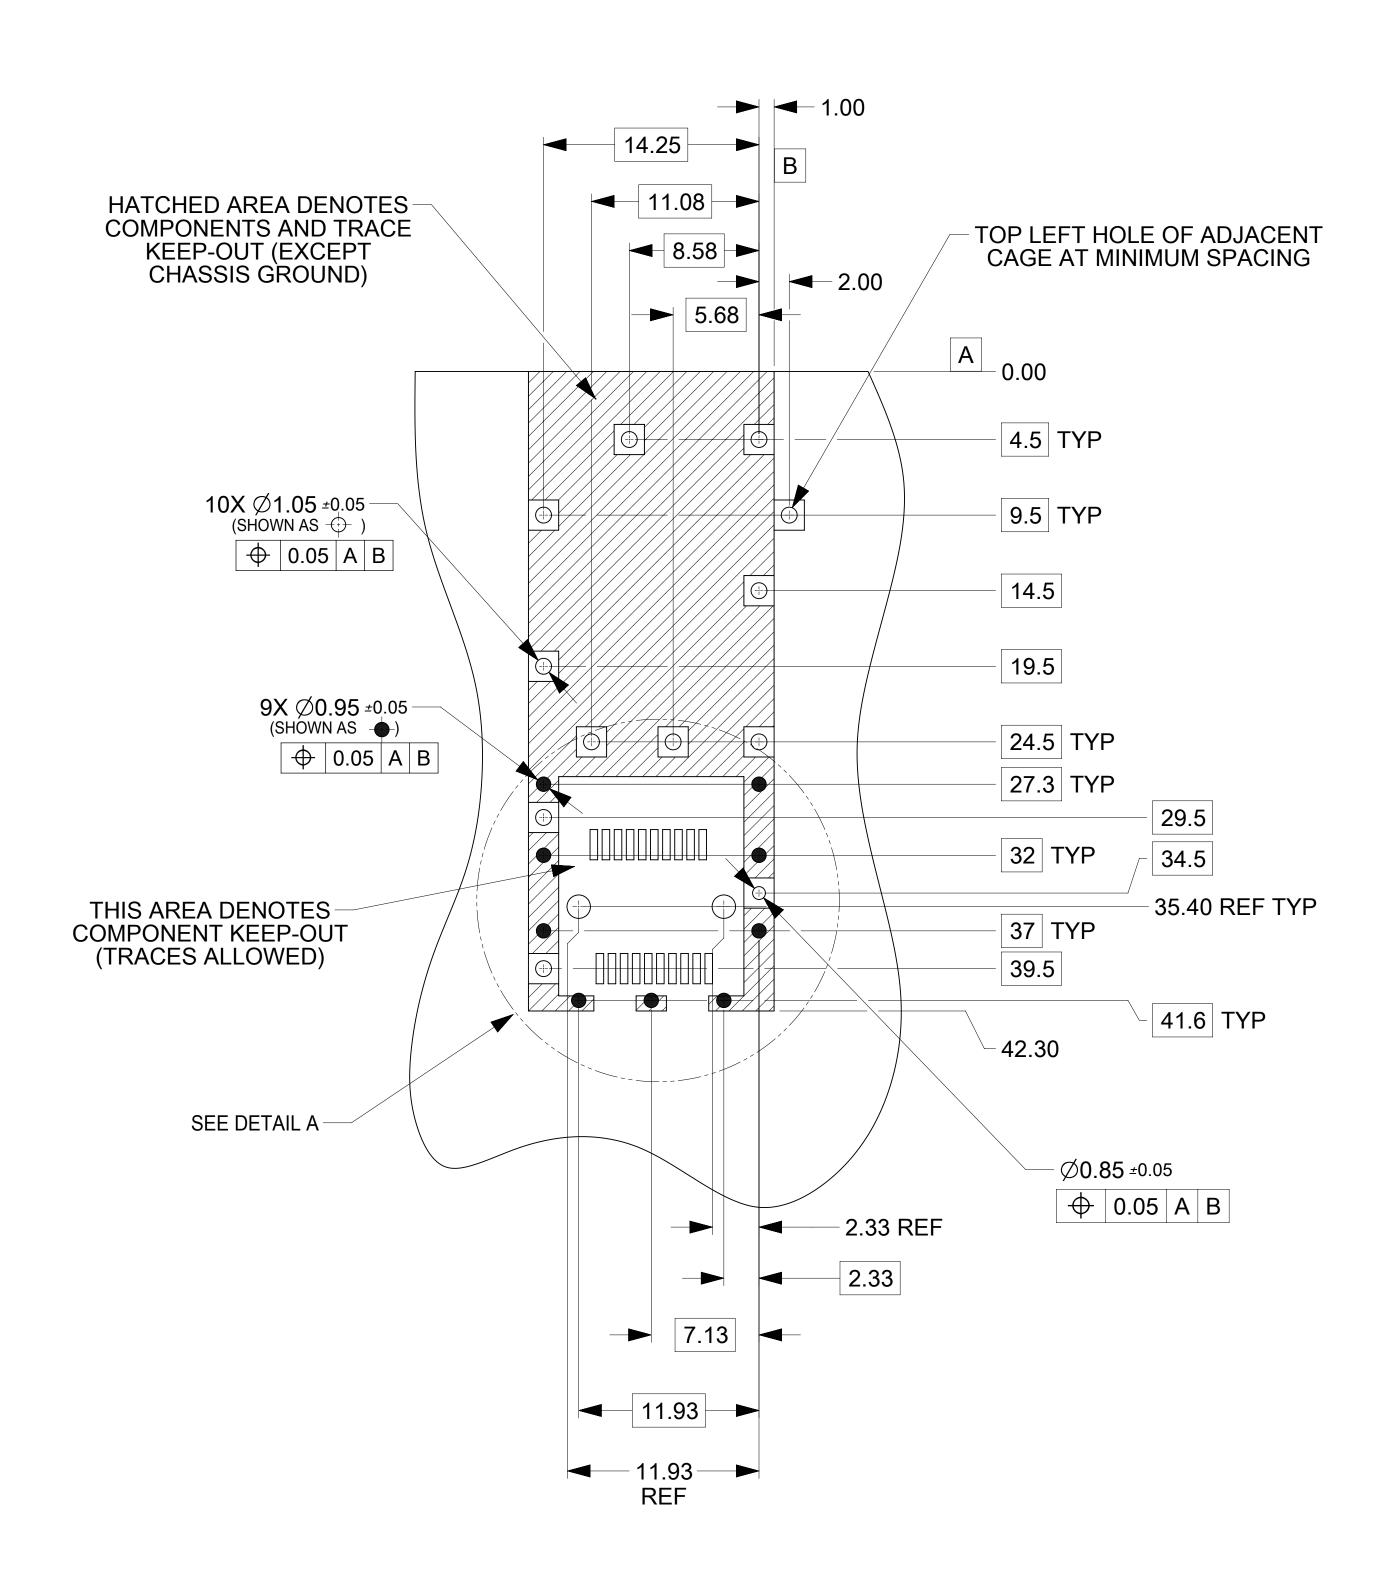


NOTES:


DOCUMENT STATUS P1

1. PADS AND VIAS CONNECT TO CHASSIS GROUND (RECOMMEND PADS TO BE 2.00mm SQUARE)

- 2. RECOMMENDED THRU HOLE PLATING INCLUDES HASL, OSP, OR IMMERSION (GOLD, SILVER, OR TIN).
- 3. CONNECTOR PAD LAYOUT PER SFP+ MSA WILL ACCOMMODATE MOLEX CONNECTOR SERIES 74441 OR EQUIVALENT.

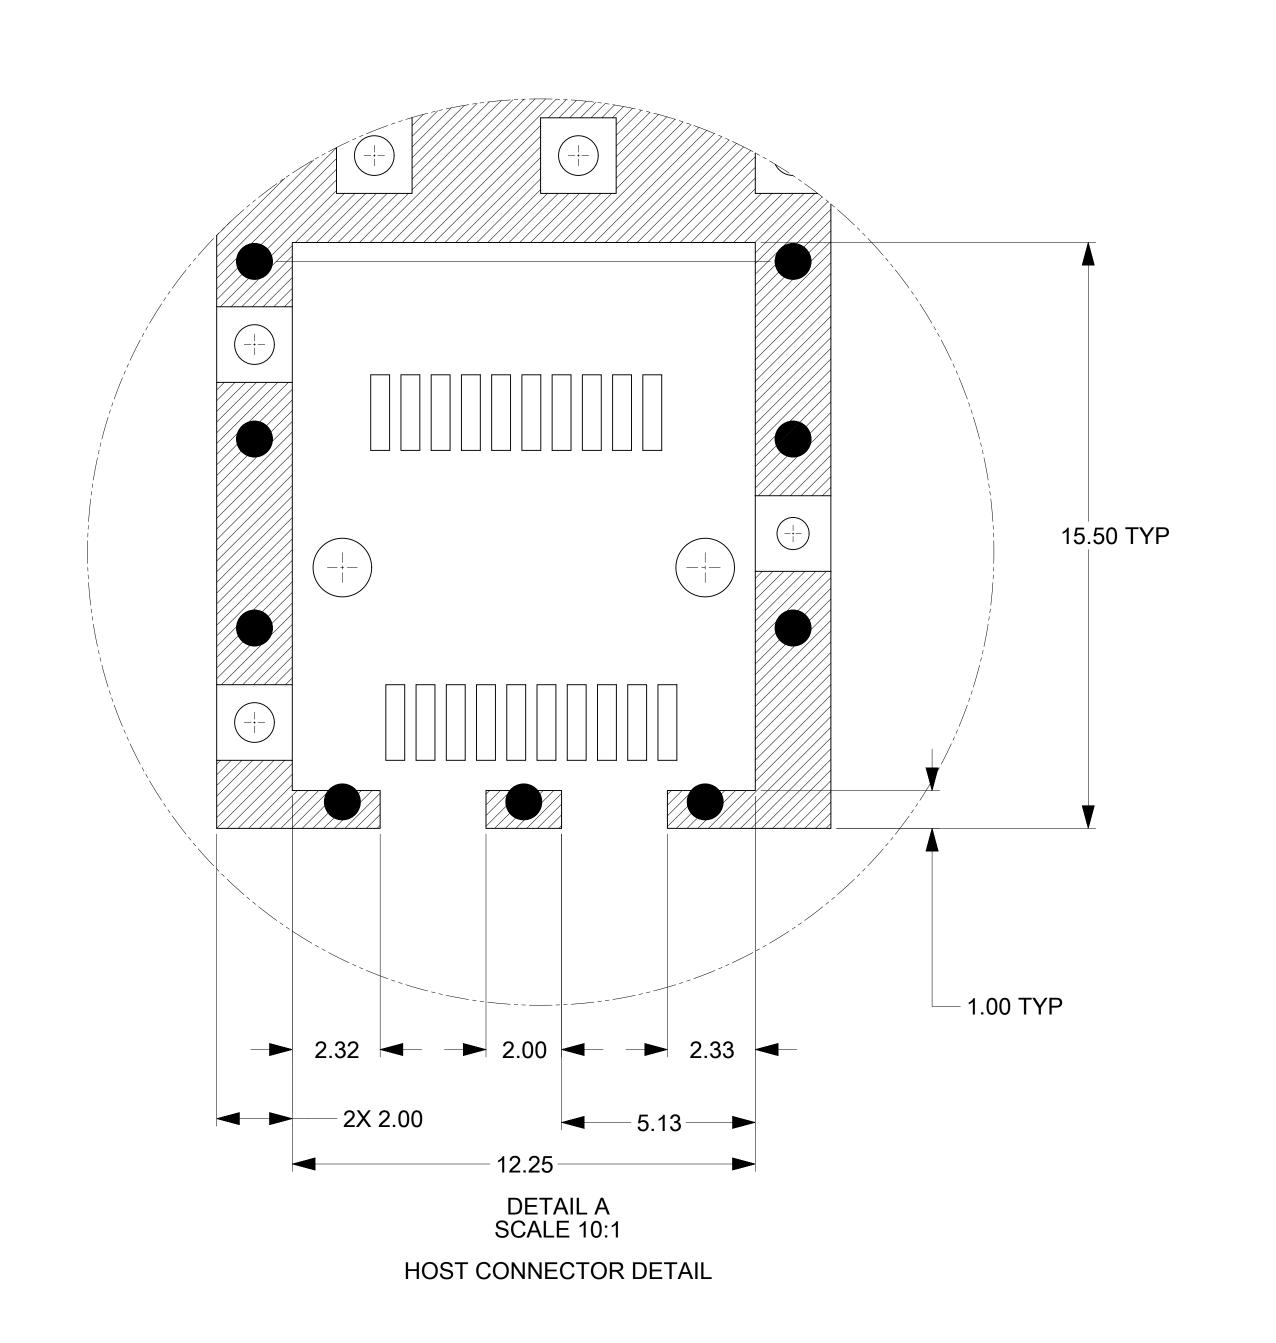

DIMENSION U	NITS	SCALE		CURREN	T REV D	ESC: OBS	OLETE	D PART NO.							
mm		1:1								n	no	le	X		
	RAL TOLE									-					
	MM	IN	ICH	EC NO:	632260)				SF	FP+ 1X1 C	AGE K	ITS,		
4 PLACES	±	±		DRWN:	RPRA	BHUM		2020/02/03	E١	AI SPRING	G FINGER	S, WIT	H HEAT	SINKS	3
3 PLACES	±	±		CHK'D:	GGA			2020/02/28							
2 PLACES	± 0.1	3 ±		APPR:	GGA			2020/02/28		PRODU	ICT CUST	OMER	DRAW	ING	,
1 PLACE	± 0.2	5 ±		INITIAL	REVIS	ION:			DOCUMENT N	UMBER			DOC TYPE	DOC PART	REVISION
0 PLACES	±	±		DRWN:	MJPA ⁻	TEL		2011/05/06	CD		10 010	4	DOD	004	114
ANGUL	AR TOL	±	1.0 °	APPR:	KLLO	/D		2012/10/31	עס	-1111	12-010	ı	PSD	001	H1
DRAFT	WHERE AF	PLICABL	.E	THIRD ANGLE	E PROJECTION	ON DRAV	VING	SERIES	MATERIAL NU	MBER	CUSTOMER	'		SHEET	NUMBER
	MUST REM HIN DIMEN					D-S	IZE	111112	SEE SI	HEET 2	GENER	AL MAI	RKET	3 (OF 5
	7			6		5			1		ر م		2		1

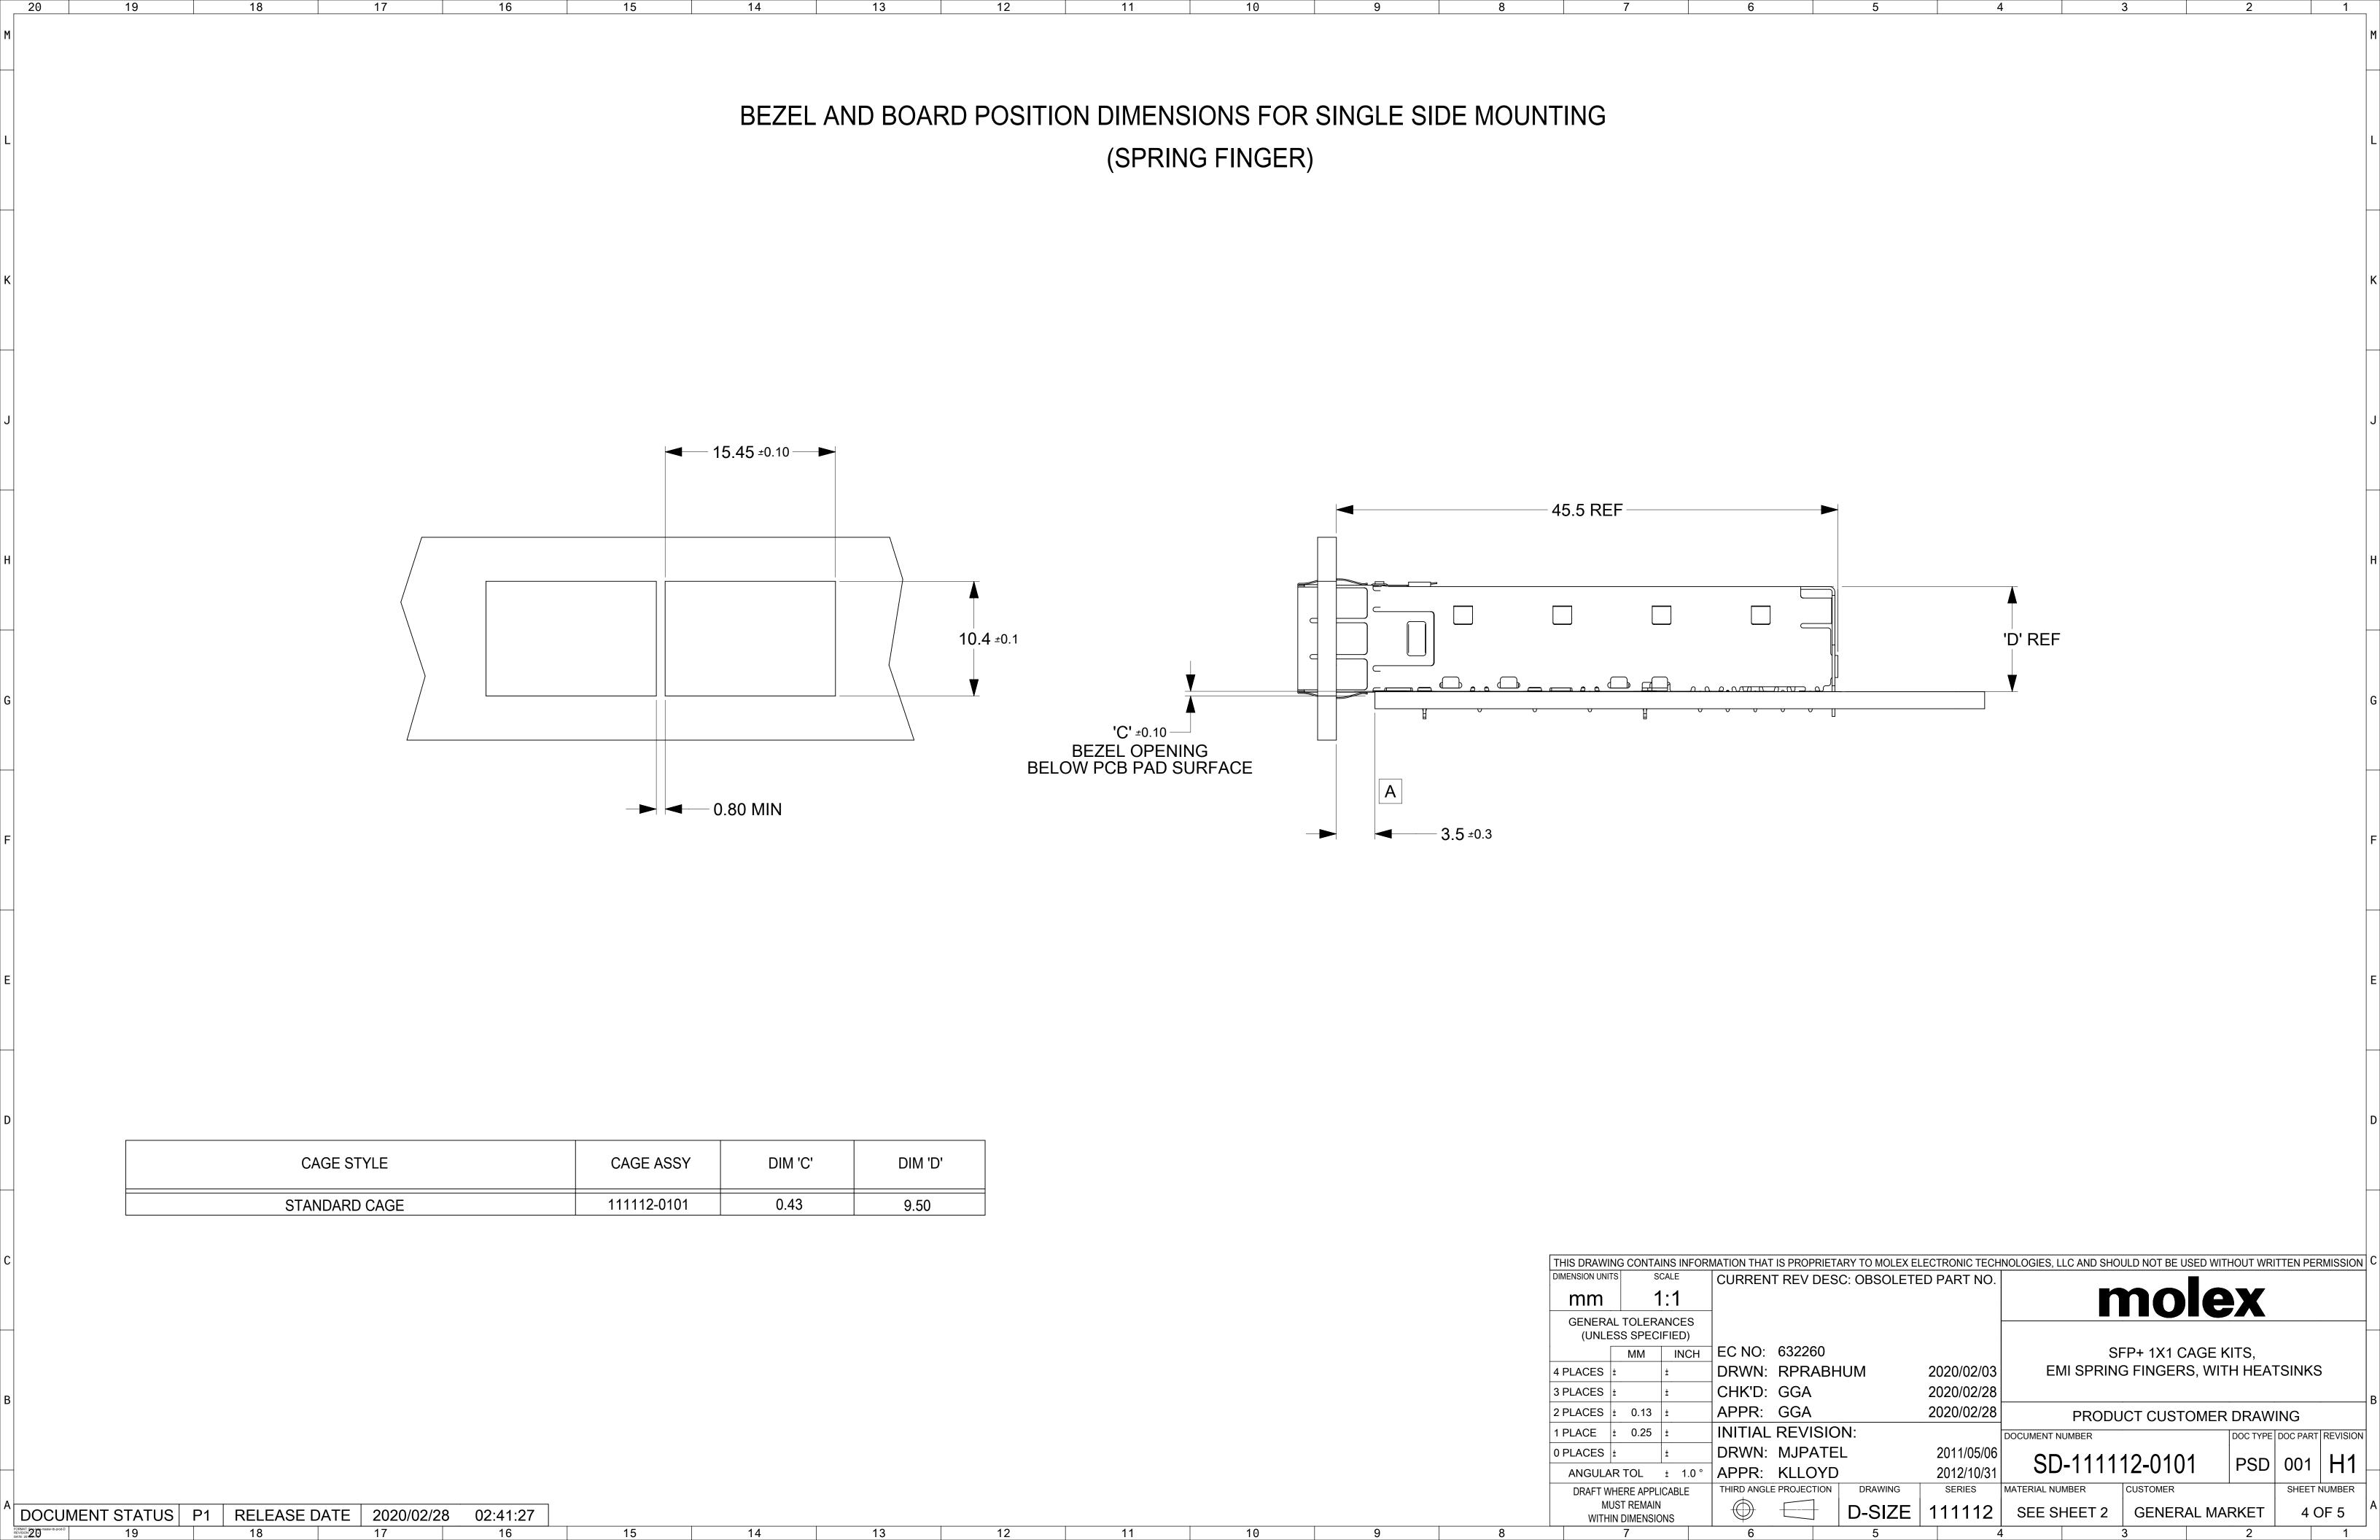

DATE (YEAR/MONTH/DAY)	REVISION	COMMENTS
2011/05/06	Α	INITIAL DRAWING OF CAGE ONLY.
2012/06/29	A1	CHANGED THE HEATSINK OPENING TO MEET THE DWDM MSA AND ADDED HEATSINKS AND HEATSINK SPRING CLIP FOR KIT PART NUMBERS.
2012/07/18	В	REVISED THE DESIGN: CHANGED HEATSINKS PINS TO MATCH THE SPACING PER THE DWDM MSA, ADDED THE NOTCHED FEATURE TO BOTH SIDES TO BE SYMMETRICAL, CHANGED THE HEATSINK P/N'S REVISED HEATSINK SPRING CLIP DESIGN, ADDED A 10mm OPTION, ADDED KITS USING CAGE 111112-0117.
2013/01/14	С	ADDED 1111123150 INTO P/N TABLE. [SHT 2]
2014/08/20	D	ADDED A NOTE "SPRING FINGER REMOVED FROM THIS VIEW FOR CLARITY" @ E19 & H19 ON SHEET1. REMOVED "LEAD FREE" FROM NOTE5 @ C20 ON SHEET 1. ADDED A SOLID BODY HEATSINK @ K2 ON SHEET2. ADDED PN: 111112-4120 IN THE PART NUMBER TABLE @ E7 ON SHEET2.
2014/12/16	E	ADDED P/N 111112-3121 IN THE PART NUMBER TABLE. [SHT 2]
2015/01/08	F	CORRECTED TYPO @ C8 & C7. [SHEET2]
2015/03/27	G	SHEET2: K2 ADDED NEW HEATSINK SOILD BODY VIEW F9 ADDED P/N 111112-4121 INTO P/N TABLE
2018/06/19	Н	OBSOLETED P/N 1111120117 & 1111123150
2020/02/03	H1	OBSOLETED PART NUMBER 1111123121, 1111120120 & 1111124120

 20
 19
 18
 17
 16
 15
 14
 13
 12
 11
 10
 9
 8
 7
 6
 5
 4
 3
 2
 1

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION DIMENSION UNITS CURRENT REV DESC: OBSOLETED PART NO. molex GENERAL TOLERANCES (UNLESS SPECIFIED) MM INCH EC NO: 632260 SFP+ 1X1 CAGE KITS, DRWN: RPRABHUM 2020/02/03 EMI SPRING FINGERS, WITH HEATSINKS 4 PLACES ± CHK'D: GGA 2020/02/28 3 PLACES ± APPR: GGA 2020/02/28 2 PLACES |± 0.13 |± PRODUCT CUSTOMER DRAWING INITIAL REVISION: 1 PLACE | ± 0.25 | ± DOCUMENT NUMBER DOC TYPE DOC PART REVISION DRWN: MJPATEL 2011/05/06 0 PLACES ± SD-111112-0101 PSD 001 **H1** ANGULAR TOL ± 1.0 ° APPR: KLLOYD 2012/10/31 THIRD ANGLE PROJECTION MATERIAL NUMBER CUSTOMER DRAFT WHERE APPLICABLE SERIES SHEET NUMBER MUST REMAIN **D-SIZE** | 111112 | SEE SHEET 2 GENERAL MARKET 5 OF 5 WITHIN DIMENSIONS