


# Surge protection device - TTC-6-1X2-M-24DC-PT-I - 2906726


Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Surge protection with integrated status indicator and knife disconnection for a 2-wire floating signal circuit, e. g. 0(4)...20 mA current loop, HART-compatible.

## Your advantages

- ✓ Space-saving and cost-saving with a narrow overall width of just 6 mm
- ✓ Continuous monitoring of protective devices, plus mechanical status indicator with optional remote signaling
- ✓ Finding the right product for all possible requirements in MCR applications is easy, thanks to the complete range of products with customized features
- ✓ Signal circuits easily interrupted for maintenance work, thanks to vertical knife disconnection

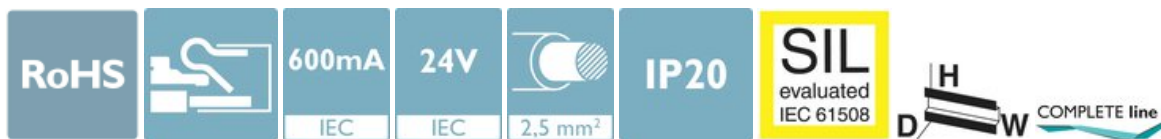

## Key Commercial Data

|              |               |
|--------------|---------------|
| Packing unit | 1 pc          |
| GTIN         |               |
| GTIN         | 4055626134581 |

## Technical data

### Dimensions

|        |                                 |
|--------|---------------------------------|
| Height | 105.8 mm                        |
| Width  | 6.2 mm +0.1 mm                  |
| Depth  | 83.5 mm (incl. DIN rail 7.5 mm) |

### Ambient conditions

|   |  |
|---|--|
| Ambient temperature (operation)         | -40 °C ... 85 °C                       |
| Ambient temperature (storage/transport) | -40 °C ... 85 °C                       |
| Permissible humidity (operation)        | 5 % ... 95 %                           |
| Altitude                                | ≤ 4000 m (amsl (above mean sea level)) |
| Degree of protection                    | IP20                                   |

### General

# Surge protection device - TTC-6-1X2-M-24DC-PT-I - 2906726

## Technical data

### General

|  |  |
|--|--|
| Housing material                       | PBT  |
| Flammability rating according to UL 94 | V-0  |
| Color                                  | traffic grey A RAL 7042  |
| Mounting type                          | DIN rail: TH 35 - 7.5 mm   |
| Type                                   | DIN rail module, one-piece   |
| Direction of action                    | Line-Line & Line-Signal Ground/Shield & optional Signal Ground/Shield-Earth Ground |

### Protective circuit

|   |   |
|---|---|
| IEC test classification   | C1  |
|   | C2  |
|   | C3  |
|   | D1  |
| Nominal voltage $U_N$   | 24 V DC   |
| Maximum continuous voltage $U_C$                                      | 30 V DC   |
|   | 21 V AC   |
| Rated current   | 600 mA (40 °C)  |
| Operating effective current $I_C$ at $U_C$                            | $\leq 5 \mu\text{A}$                                  |
| Residual current $I_{PE}$   | $\leq 1 \mu\text{A}$                                  |
| Nominal discharge current $I_n$ (8/20) $\mu\text{s}$ (line-line)      | 5 kA  |
| Nominal discharge current $I_n$ (8/20) $\mu\text{s}$ (line-earth)     | 5 kA  |
| Pulse discharge current $I_{imp}$ (10/350) $\mu\text{s}$ (line-line)  | 0.5 kA  |
| Pulse discharge current $I_{imp}$ (10/350) $\mu\text{s}$ (line-earth) | 0.5 kA  |
| Total discharge current $I_{total}$ (8/20) $\mu\text{s}$              | 10 kA   |
| Voltage protection level $U_p$ (line-line)                            | $\leq 55 \text{ V}$ (C1 - 1 kV / 500 A)               |
|   | $\leq 65 \text{ V}$ (C2 - 10 kV / 5 kA)               |
|   | $\leq 50 \text{ V}$ (C3 - 25 A)                       |
|   | $\leq 55 \text{ V}$ (C3 - 100 A)                      |
| Voltage protection level $U_p$ (line-earth)                           | $\leq 750 \text{ V}$ (C1 - 1 kV / 500 A)              |
|   | $\leq 750 \text{ V}$ (C2 - 10 kV / 5 kA)              |
|   | $\leq 700 \text{ V}$ (C3 - 25 A)                      |
|   | $\leq 750 \text{ V}$ (C3 - 100 A)                     |
| Voltage protection level $U_p$ static (line-line)                     | $\leq 50 \text{ V}$ (C1 - 1 kV / 500 A)               |
|   | $\leq 65 \text{ V}$ (C2 - 10 kV / 5 kA)               |
| Voltage protection level $U_p$ static (line-earth)                    | $\leq 750 \text{ V}$ (C1 - 1 kV / 500 A)              |
|   | $\leq 750 \text{ V}$ (C2 - 10 kV / 5 kA)              |
| Response time $t_A$ (line-line)                                       | $\leq 1 \text{ ns}$                                   |
| Response time $t_A$ (line-earth)                                      | $\leq 100 \text{ ns}$                                 |
| Input attenuation aE, sym.  | typ. 0.3 dB ( $\leq 250 \text{ kHz}$ / 150 $\Omega$ ) |
| Cut-off frequency $f_g$ (3 dB), sym. in 150 $\Omega$ system           | typ. 940 kHz  |
| Capacity (line-line)  | typ. 2.2 nF   |

# Surge protection device - TTC-6-1X2-M-24DC-PT-I - 2906726

## Technical data

### Protective circuit

|                                 |  |
|---------------------------------|--|
| Resistance per path             | 1.65 Ω ±20 %   |
| Surge protection fault message  | optical  |
| Max. required back-up fuse      | 630 mA (FF)  |
| Impulse durability (line-line)  | C1 - 1 kV / 500 A<br>C2 - 10 kV / 5 kA<br>C3 - 100 A               |
| Impulse durability (line-earth) | C1 - 1 kV / 500 A<br>C2 - 10 kV / 5 kA<br>C3 - 100 A<br>D1 - 500 A |
| Pulse reset time (line-line)    | ≤ 700 ms   |
| Pulse reset time (line-earth)   | ≤ 1500 ms  |

### Additional technical data

|   |            |
|---|------------|
| Max. total discharge current I <sub>total max</sub> (8/20) μs | 20 kA (1x) |
|---|------------|

### Connection data

|                                  |   |
|----------------------------------|---|
| Connection method                | Push-in connection                          |
| Stripping length                 | 8 mm  |
| Conductor cross section flexible | 0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup> |
| Conductor cross section solid    | 0.2 mm <sup>2</sup> ... 4 mm <sup>2</sup>   |
| Conductor cross section AWG      | 24 ... 12                                   |

### Standards and Regulations

|                          |  |
|--------------------------|--|
| Standards/specifications | IEC 61643-21 2000 + corrigendum 2001 + A1:2008, modified + A2:2012 |
|                          | EN 61643-21 2001 + A1:2009 + A2:2013                               |

### Environmental Product Compliance


|            |   |
|------------|---|
| REACH SVHC | Lead 7439-92-1  |
| China RoHS | Environmentally Friendly Use Period = 50 years  |
|            | For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration" |

## Drawings



### Pictogram



### Diagram

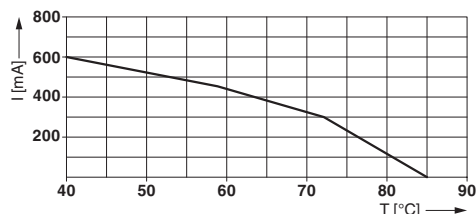

# Surge protection device - TTC-6-1X2-M-24DC-PT-I - 2906726

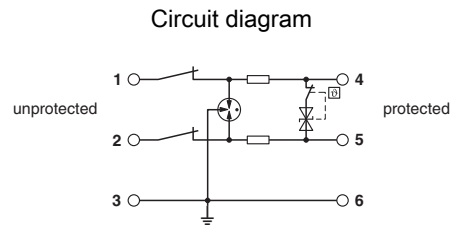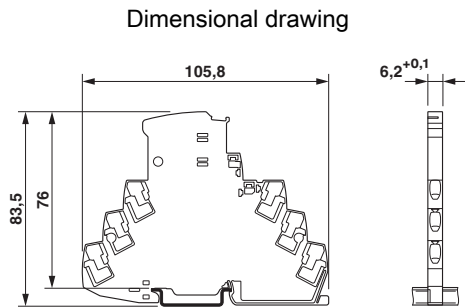

## Classifications

### eCl@ss

|               |          |
|---------------|----------|
| eCl@ss 10.0.1 | 27130807 |
| eCl@ss 11.0   | 27130807 |
| eCl@ss 4.0    | 27140201 |
| eCl@ss 4.1    | 27130801 |
| eCl@ss 5.0    | 27130801 |
| eCl@ss 5.1    | 27130801 |
| eCl@ss 6.0    | 27130800 |
| eCl@ss 7.0    | 27130807 |
| eCl@ss 9.0    | 27130807 |

### ETIM

|          |          |
|----------|----------|
| ETIM 3.0 | EC000943 |
| ETIM 4.0 | EC000943 |
| ETIM 6.0 | EC000943 |
| ETIM 7.0 | EC000943 |

### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 30212010 |
| UNSPSC 7.0901 | 39121610 |
| UNSPSC 11     | 39121610 |
| UNSPSC 12.01  | 39121610 |
| UNSPSC 13.2   | 39121620 |
| UNSPSC 18.0   | 39121620 |
| UNSPSC 19.0   | 39121620 |
| UNSPSC 20.0   | 39121620 |
| UNSPSC 21.0   | 39121620 |

## Approvals

### Approvals

# Surge protection device - TTC-6-1X2-M-24DC-PT-I - 2906726

## Approvals

Approvals

DNV GL / CSA / UL Listed / CSAus / cCSAus

Ex Approvals

## Approval details

|           |  |   |               |
|-----------|--|---|---------------|
| DNV GL    |  | <a href="https://approvalfinder.dnvgl.com/">https://approvalfinder.dnvgl.com/</a>   | TAE000027G    |
| CSA       |  | <a href="http://www.csagroup.org/services-industries/product-listing/">http://www.csagroup.org/services-industries/product-listing/</a>               | 70136717      |
| UL Listed |  | <a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a> | FILE E 138168 |
| CSAus     |  | <a href="http://www.csagroup.org/services-industries/product-listing/">http://www.csagroup.org/services-industries/product-listing/</a>               | 70136717      |
| cCSAus    |  |   |               |

## Accessories

Accessories

End block

End clamp - CLIPFIX 35-5 - 3022276



Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, with parking option for FBS...5, FBS...6, KSS 5, KSS 6, width: 5.15 mm, color: gray

Labeled terminal marker

## Surge protection device - TTC-6-1X2-M-24DC-PT-I - 2906726

### Accessories

Zack Marker strip, flat - ZBF 6 CUS - 0825027



Zack Marker strip, flat, Strip, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 6.2 mm, lettering field size: 5.15 x 6.15 mm, Number of individual labels: 10

Zack Marker strip, flat - ZBF 6,QR:FORTL.ZAHLEN - 0808765



Zack Marker strip, flat, Strip, white, labeled, Printed vertically: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: snap into flat marker groove, for terminal block width: 6.2 mm, lettering field size: 5.15 x 6.15 mm, Number of individual labels: 10

### Marker pen

Marker pen - X-PEN 0,35 - 0811228



Marker pen without ink cartridge, for manual labeling of markers, labeling extremely wipe-proof, line thickness 0.35 mm

### Terminal marking

Zack Marker strip, flat - ZBF 6:UNBEDRUCKT - 0808710



Zack Marker strip, flat, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snap into flat marker groove, for terminal block width: 6.2 mm, lettering field size: 5.15 x 6.15 mm, Number of individual labels: 10

Zack Marker strip, flat - ZBF 6/WH-100:UNBEDRUCKT - 0808736



Zack Marker strip, flat, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snap into flat marker groove, for terminal block width: 6.2 mm, lettering field size: 5.15 x 6.15 mm, Number of individual labels: 10

### Additional products

## Surge protection device - TTC-6-1X2-M-24DC-PT-I - 2906726

### Accessories

Remote signaling set - TTC-6-FMRS-PT - 2907811



Module set for the optical monitoring and floating remote signaling of adjacent surge protective devices in the TERMITRAB complete or CLIXTRAB product family. Suitable for directly grounded DIN rails.

---

Shield connection - SSA 3-6 - 2839295



Shield fast connection for 3 ... 6 mm cable diameter. Potential connecting cable: 200 mm, 1 mm<sup>2</sup>, color: black

---

Shield connection - SSA 5-10 - 2839512



Shield fast connection for 5 ... 10 mm cable diameter. Potential connecting cable: 200 mm, 1 mm<sup>2</sup>, color: black

---

Phoenix Contact 2021 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>