

**Ratings**

Voltage: 300 V

Temperature

Static: -40 to 105 °C

Dynamic: -20 to 105 °C

Flammability: VW-1

Water resistant: 75 °C

Oil resistant: 60 °C (jacket)

≥50% elongation and tensile strength after aging

UV resistance: jacket, 720 hours xenon or carbon arc exposure

≥80% tensile strength and elongation after aging

**Conductor**

Conductor count: 4

Gauge: 32 AWG 0.04 mm<sup>2</sup>

Material: tinned copper strands

Strand size: Ø 0.08 mm x 7

Resistance at 20 °C: 588 Ω /km Max

**Insulator**

Material: PVC

Color: red, black, white, yellow

Diameter: Ø 1.05 ±0.10 mm

Nominal thickness: 0.38 mm

Resistance at 20 °C: 10 MΩ /km Min

**Drain**

Stranding: Ø 0.08 mm x 7

Material: tinned copper strands

**Shield**

Type: aluminum mylar + tinned copper braid

Coverage: 65% min braid, 100% foil

Braid stranding: Ø0.10 mm

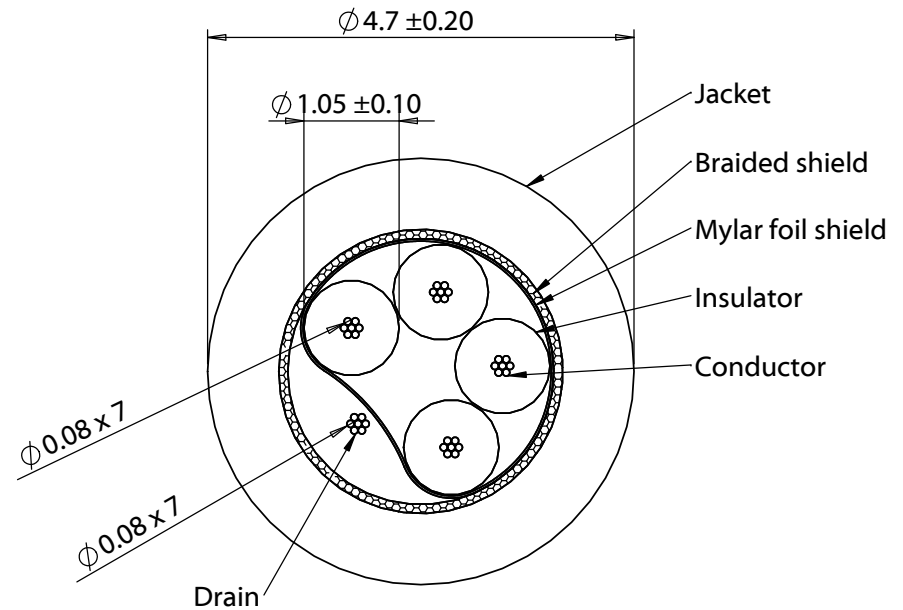
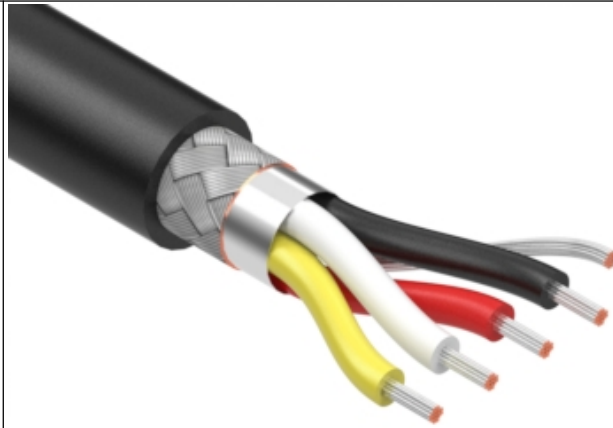
**Outer jacket**

Material: PVC, 80A

Color: black

Diameter: Ø 4.7 ±0.20 mm

Nominal thickness: 0.83 mm

**Wire marking:** E339579 UL AWM STYLE 20387 32 AWG 105°C  
300V VW-1 60°C OIL RESISTANT UV RESISTANT TENSILITY**Use:** External wiring

Revision:	Date:	Description:	Prepared:	Notes:	<b>TENSILITY</b> tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com
A	8/25/2020	Initial release	Verified:	RoHS compliant Function test: no open, no short circuit, no intermittent	
			Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Description: Wire, 4C TS, 32 AWG, UL20387, 300V, 105C, 60C oil, UV, 4.7 mm, shielded, VW-1, PVC, 80A, black	Size: A Part number: 30-01583
					Scale: 12:1  Sheet 1 of 1

5

4

3

2

1