



THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER	
ORIGINAL	(1)

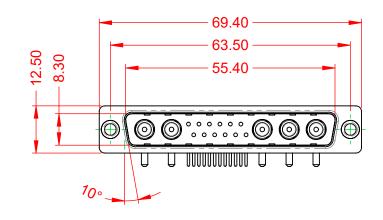




NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:


OPERATING TEMPERATURE:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, TIN PLATED COPPER ALLOY, GOLD FLASH PLATED



POWER/CO-AX CONTACT RATING:	10A (CURRENT)
(IF PRESENT)	
SIGNAL CONTACT CURRENT RATING:	5A PER CONTACT
SIGNAL CONTACT RESISTANCE:	10mO MAX
INSULATOR RESISTANCE:	5000MΩ min.
DIELECTRIC	

WITHSTANDING VOLTAGE:



	COMBINATION D-SUB		SW REFERENCE NO.: 629 COMBO ASSEMBLY			
COMBINAT			DATE: JAN. 01/20	19		
		CHECKED:	DATE:			
EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2		
	OR USED AS THE BASIS FOR THE	DRAWING NUMBER: 629-17W	5240-1T1	ISSUE		
	E MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	PART NUMBER: 629-17W	5240-1T1	1		

-55°C ~ 125°C

1000V AC rms



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

