

т	۵	п –	m	0



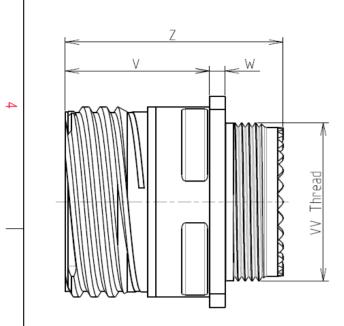

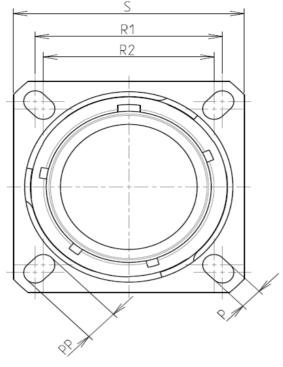

Keying

CHARACTERISTICS

ω

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 09

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : W = Olive drab Cadmium

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium			
-Shell Plating	: Olive drab Cadmium			
-Insulator	: Thermoplastic			
-Contacts	: Copper Alloy			
-Seals & Grommet	: Silicon Elastomer			
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum			
-Durability	: 500 Mating cycles			
-Delivered with Souriau contacts and Accessories				
-Temperature Range	_∶ -65°C to +175°C			
-Salt Spray	: 500 hours			

: 9.15 g ± 10%

8D 0

G

09

-

W

98

А

F

Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
PP	5.49±0.2		
R1	18.26		
R2	15.09		
S	23.8±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M12x1-6g		

т		0	Φ	A	
S R1 R2					4
		LAYOUT SHOWN AS EXA	AMPLE		3
Connector dimension Dim Nominal P 3.25±0.2 PP 5.49±0.2 R1 18.26 R2 15.09 S 23.8±0.3 V 20.83+0/-1.25 W 2.1/2.5 Z 31.5 Max VV THREAD M12x1-6g		SOURIAU shall not be liable for any i due to a use of the Products whic the Specifications issued by either of t (professional recommendation Country FR	th does not comply with he Parties or by a third on, technical notice.) Jurisdiction & Not Li	h I party Control List	2
		PN: 8D009W	98AA		
	A 03-10-2016 ISS DATE Designed By:	First Release Latest modification - by Date:	CUST	MOD N°	
	TITLE	TITLE Aluminium Receptacle 8D series			
A	SCALE -{	General linear Tolerances: ±		RDS / PROJECT 859	1
ORIENTA CONTACT TYPE : PIN(500	ATION : A Matings)	U WWW.SOURIAU.COM it must not be reproduced of communicated without permiss			
CONTACT LAYOU	JT : 09-98 FORMAT A3	SOURIAU DRG N° 8D009W98AA-C		SHEET 1/2	
E	D	C	В	A	

r		۵	г П	m	Ū	0
		Contact Layout				Panel Cutou
4	-X <u></u>	(lnset arrangement 9-96)				SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
	Shell Arrangement Numb size no. conta 9 -98 3	t Contact location X-axis Y-axis (mm) (mm) +.065 (1.65) +.038 (0.97) +.000 (0.00)075 (1.91) 065 (1.65) +.038 (0.97) er of Size Service Contact Supersedes acts contacts rating location			LL V	ØT
ω						Dim ØA ØAA R1 ØT
						SOURIAU shall not be liable for any due to a use of the Products wh the Specifications issued by either of (professional recommendat
N						PN: 8D009V
_					A 03-10-20 ISS DATE Designed By:	116 First Release Latest modification - by Date:
					SCALE NA	Aluminium General linear Tolerances:
_					SOURIA	
		1			FORMAT A3	SOURIAU 8D009W
	Н	G	F	E	D	C

