
 Q	П	т	0





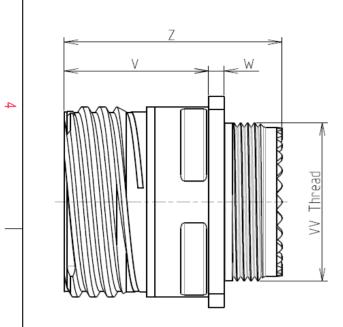

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 11

PLATING : F = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material : Aluminium : Nickel -Shell Plating -Insulator : Thermoplastic -Contacts : Copper Alloy : Silicon Elastomer -Seals & Grommet -Contact Plating : Gold over copper Alloy 0.8µm minimum -Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories : -65°C to +200°C -Temperature Range : 48 hours -Salt Spray -Mass : 11.5 g ± 10%

8D 0

G

11

F

22

Ρ

F


С

Dim	Nominal
Р	3.25±0.2
PP	4.93±0.2
R1	20.62
R2	18.26
S	26.2±0.3
V	20.83+0/-1.25
W	2.1/2.5
Z	31.5 Max
VV THREAD	M15x1-6g

CONTACT TYPE : PIN(500 Matings)

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recomment

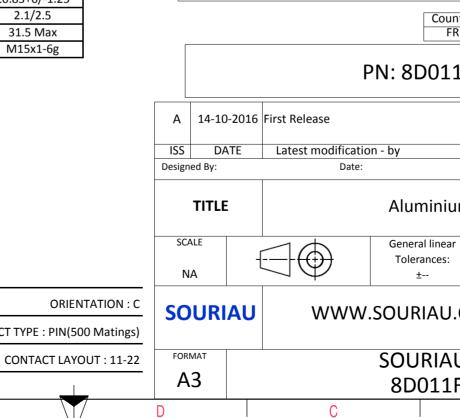

σ		А			
				4	
AS EXAMPLE				3	
any non-conformi s which does not co or of the Parties or ndation, technical n untry Juriso	mply with by a third par	ty trol List		2	
.1F22PC					
	CUSTOME	R DRAWING	MOD N°		
um Receptac	le 8D seri	es			
ar :		/ PROJECT 5 9		1	
J.COM	COM This document is the property of SOURIAU it must not be reproduced or communicated without permission				
U DRG N° F22PC-C			SHEET 1/2		
В		Α		1	

4	(Contact Layout 22*			2	SQUARE FLANGE RECEPTACI REAR MOUNTING	Panel Cur
	Ctc A B C	4#22D 11-22 X Υ 1.905 1.905 1.905 -1.905 -1.905 -1.905				F	Dim
ω	D	-1.905 1.905					ØA ØAA R1 ØT
2						due to a u the Specificatio	Il not be liable for se of the Products ns issued by either ssional recommend Cour F
					A 14-10	-2016 First Release	PN: 8D01
					ISS D/ Designed By: TITLE	ATE Latest modifica Dat	
-					SCALE NA SOURI		General linear Tolerances: ±
	Н	G	F	E	FORMAT A3 D	C	SOURIA 8D011

Т

ш

т

G

0

