
	т		۵	т		m	τ	D	0	1	
4		Z'	V Thread	ØS							
ယ				Keying Sho	wn as example				LAYC	OUT SHOWN AS	EXA
	CHARACTERISTICS				Connector	dimension					
	Standard : Based on	MIL-DTL-38999 Series	; 111		Dim ØS	Nominal 25 Max					
	-Shell Material -Shell Plating -Insulator -Contacts -Seals & Grommet	: Composite : Olive drab Cadmi : Thermoplastic : Copper Alloy : Silicon Elastomer			Z' VV THREAD	31.5 Max M15x1-6g			the Specifications is	f the Products v	which of th lation
N	-Contact Plating -Durability -Delivered with Souri	: 500 Mating cycle		ım					Р	N: 8D51	{
	-Temperature Range -Salt Spray -Mass	<ul> <li>-65°C to +175°C</li> <li>2000 hours</li> <li>11.4 g ± 10%</li> </ul>					-	A 15-10-2 ISS DAT Designed By:	2016 First Release E Latest modification Date:	- by	
	BASIC SERIES:	8D	5   -   11	J 22 P A	I		-	SCALE		Comp General linear	
<b>_</b>	SHELL TYPE : Plug w							NA		Tolerances: ±	
	CONTACT TYPE     : Standard Crimp Contact       SHELL SIZE : 11     CONTACT TYPE : PIN(500 Mate)							SOURIA	U WWW.SOURIAU.CC		CO
	PLATING : J =	Olive drab Cadmium				CONTACT LAYO	UT : 11-22	FORMAT A3		SOURIAI 8D511.	
l	Н		G	F		E		D	С		,
						$\vee$			-		

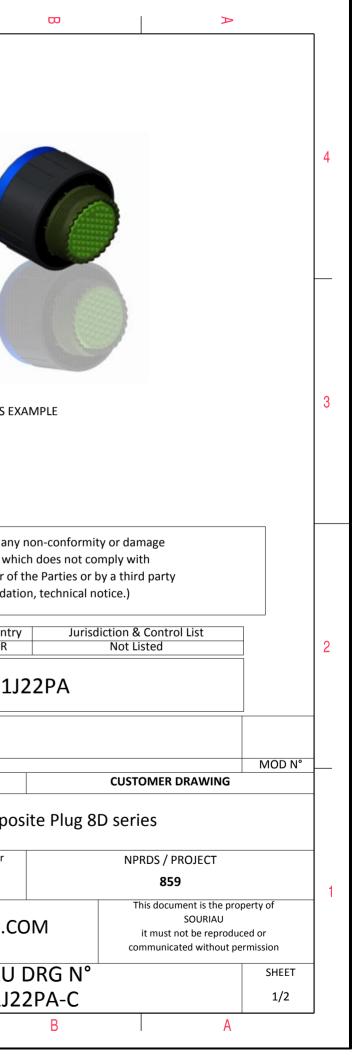

	Ŧ	۵	г	m	D	0	
4		Contact Layout 22*					
3	Ctc A B C D	4#22D 11-22 X Y 1.905 1.905 1.905 -1.905 -1.905 1.905 -1.905 1.905					
	-					SOURIAU shall no due to a use of the Specifications is (profession	the Products w
2						PI	Coun FR N: 8D511
					A 15-10-202 ISS DATE Designed By: TITLE	16 First Release Latest modification Date:	- <sup>by</sup> Comp
-					SCALE NA SOURIAU		General linear Tolerances: ±
					FORMAT		SOURIAL

G

Н


F

Е

A3

D

С

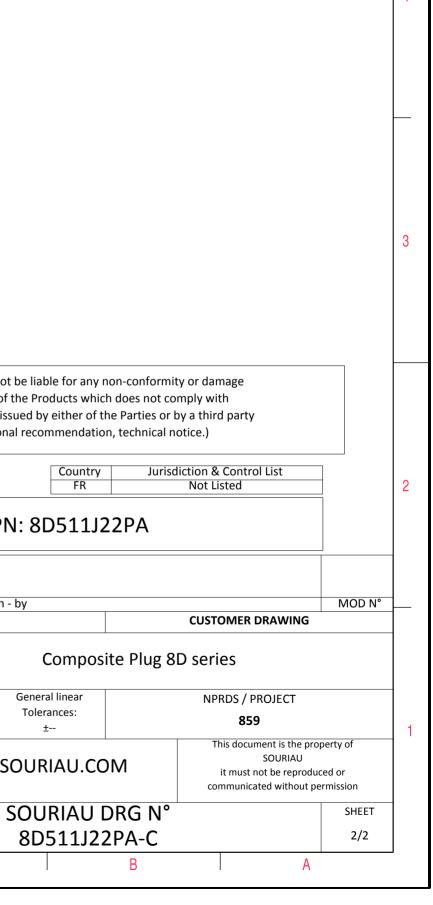

Δ