




TOLERANCE:  
 0.0 ±0.25  
 0.00 ±0.13  
 0.000 ±0.05



THIS IS A C.A.D. GENERATED DRAWING  
 DO NOT MAKE MANUAL REVISIONS TO MASTER.

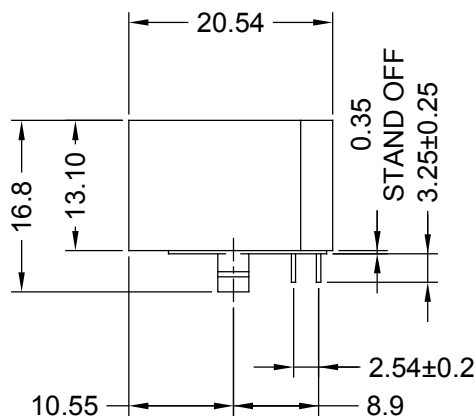

ISSUE NUMBER	
ORIGINAL	①
HOUSING MATERIAL WAS PBT POLYESTER F. BRIONES JULY 8/05	③
DIM..250 WAS .311 F. BRIONES MAY12/08	④
PIN LOCATIONS ADDED F. BRIONES OCT.07/10	⑤
PT NO'S ON TABLE WAS AOO- F. BRIONES JAN.21/11	⑦
DWG. UPDATED F. BRIONES MAY 02/11	⑧
ADD ELECTRICAL RATING R.STA.MONICA OCT.15/14	⑨
UPDATE DRAWING Y.ZHANG SEP.04/18	⑩
UPDATE DRAWING Y.ZHANG SEP.10/18	⑪

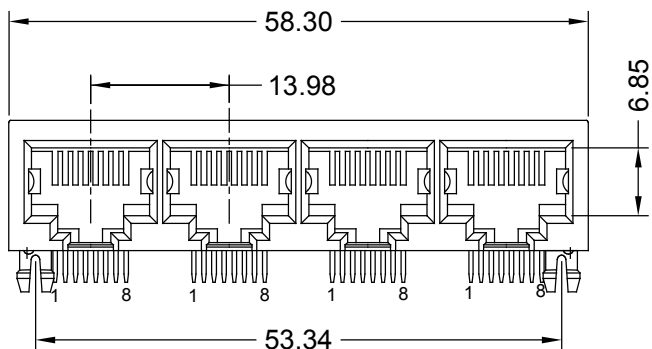

SPLIT-PEGS

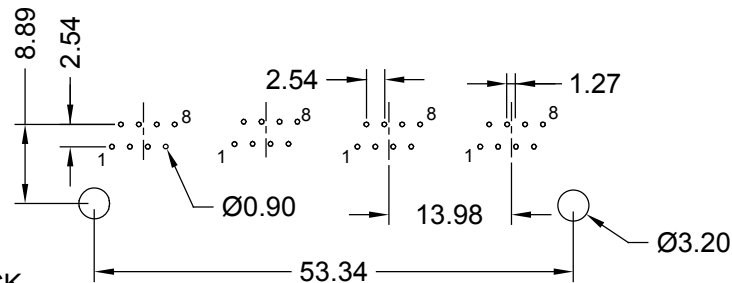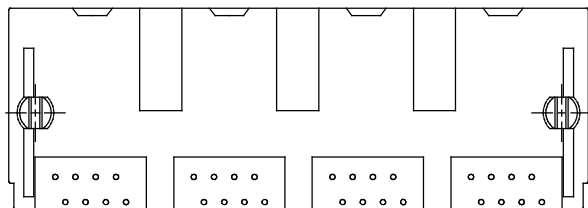

PC BOARD LAYOUT

**MATERIAL AND FINISH:**

HOUSING: THERMOPLASTIC WITH MIXED GLASS FIBER, UL94V-0, COLOR BLACK

CONTACTS: PHOSPHOR BRONZE, THICKNESS=0.35mm

SELECTIVE GOLD PLATING ON CONTACT AREA

GOLD FLASH PLATING ON SOLDER TAIL

**PART NUMBER GOLD PLATING**

A00-432-260-450	GOLD FLASH
A00-432-360-450	15 MICROINCHES OF GOLD
A00-432-660-450	30 MICROINCHES OF GOLD
A00-432-960-450	50 MICROINCHES OF GOLD

CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F

**ELECTRICAL RATING:**

CURRENT RATING: 1.5A MAX.

VOLTAGE RATING: 150V AC MAX.

WITHSTANDING VOLTAGE: 1000V AT 60HZ, 1 MINUTE BET ADJACENT CONTACTS

INSULATION RESISTANCE: 500 MEGOHM MIN.


CONTACT RESISTANCE: 30 MILLIOHM MAX.


OPERATING TEMPERATURE: -40°C TO +85°C

SOLDER BATH TEMPERATURE: 245°C ± 5°C

SOLDER IMMERSION TIME: 5 ± 0.5 SEC

THIS SERIES FULLY CONFORMS TO THE  
 EUROPEAN UNION DIRECTIVES  
 2011/65/EU FOR RoHS COMPLIANCY.



<b>4 PORTS,8 POSITIONS R/ANGLE PCB JACK</b>	ACAD REF. DRAWING: A00-432-260-450
	DRAWN:F.BRIONES DATE: MAR. 12/03
 <b>EDAC INC</b> TORONTO, ONTARIO CANADA YOUR CONNECTION TO QUALITY & SERVICE	PART NUMBER
	<b>SEE TABLE</b>
	DRAWING NUMBER <b>A00-432-260-450</b>
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	ISSUE <b>11</b>