



Electrical Specifications

Center Frequency: 87.5 MHz
3dB Bandwidth: 4 MHz Min
Passband: 85.5-89.5 MHz
Insertion Loss at Fo: 3.5 dB Max
Return Loss at Fo: 15 dB Min
Rejection: >70 dB @ 72.5 MHz
 >70 dB @ 102.5 MHz


Mechanical

Connector Type: SMA (F)
Dimensions: 3.75 x 1.0 x 0.5 Inches

Environmental

Operating Temperature: -40 to +85° C
Storage Temperature: -50 to +95° C

Outline Drawing:

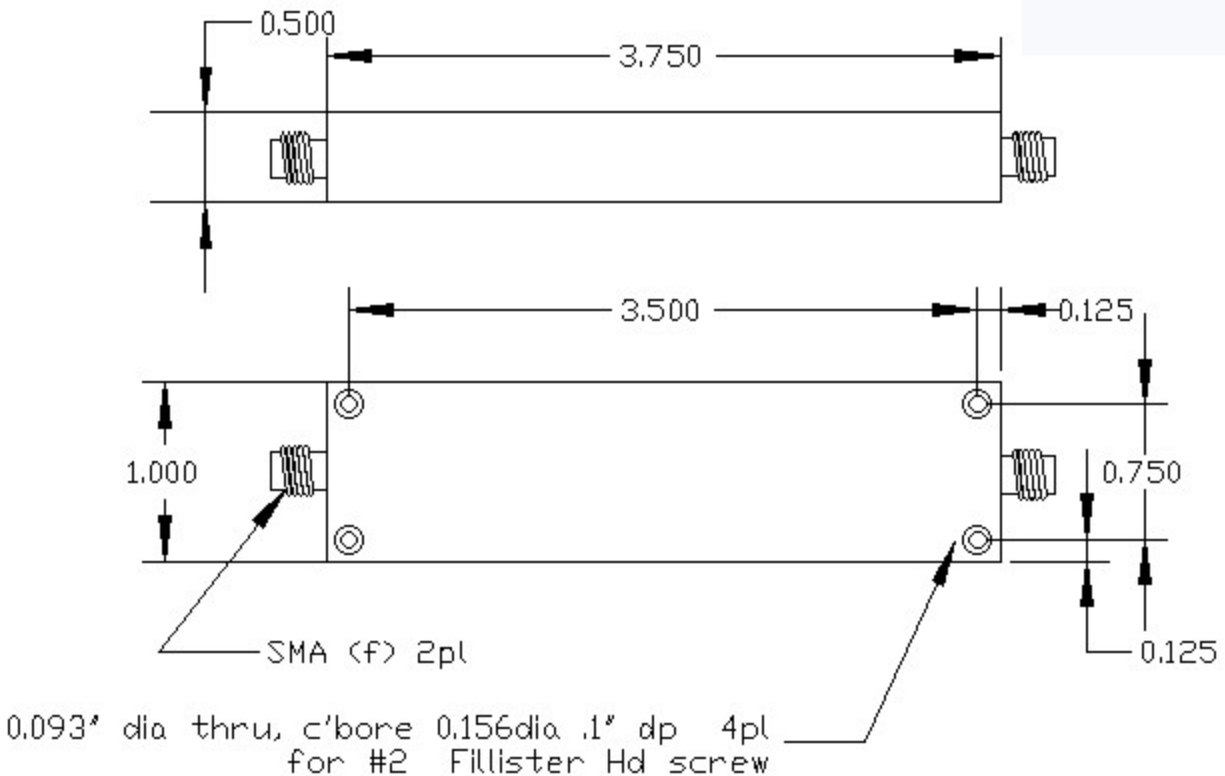

Outline Drawing 986187