

_		 	
±	دی ا	 111	





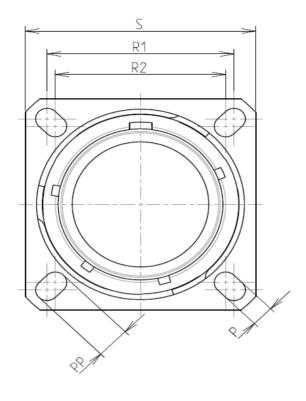

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 17

SHELL TYPE : Square Flange Receptacle

PLATING : X = Without Plating

Н

CONTACT TYPE : Standard Crimp Contact

ω

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Composite			
-Shell Plating	: Without Plating			
-Insulator	: Thermoplastic			
-Contacts	: Copper Alloy			
-Seals & Grommet	: Silicon Elastomer			
-Contact Plating	: Gold over copper Alloy 0.8µm minimum			
-Durability	: 500 Mating cycles			
-Delivered with Souriau contacts and Accessories				
-Temperature Range	: -65°C to +175°C			

: 2000 hours

8D 0

G

17

-

Х


22

F

S C

Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
PP	4.93±0.2		
R1	26.97		
R2	24.61		
S	33.3±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M25x1-6g		

Е

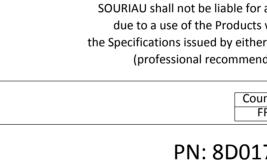

	L				
	В	17-0)4-17	Drawing Update	
	ISS DATE Latest mod		Latest modificatio	n - by	
	Design	ed By:		Date:	
	TITLE		:		Composite
	SCA N		-	\bigcirc	General linear Tolerances: <u>+</u>
ORIENTATION : C	SOURIA		ΔIJ	WWW.SOURIA	
CONTACT TYPE : SOCKET(500 Matings)		•			
CONTACT LAYOUT : 17-22	FOR	MAT			SOURIAU
	A	3			8D017X2

D

С

				1			
σ		A					
				4			
AS EXAMPLE				3			
any non-confo	rmity or dama	age					
any non-conformity or damage which does not comply with or of the Parties or by a third party adation, technical notice.)							
untry Ju FR	risdiction & C Not List			2			
7X22SC	(22SC						
			MOD N°				
	CUSTO	MER DRAWING					
site Receptacle 8D series							
ar	NPRDS / PROJECT 859						
J.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission							
UDRG N° SHEET							
2X22SC-C		A	1/2	J			
5	I	~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~					

r	Ŧ	۵	г П	m	D	0	
4		Contact Layout 22				P	Panel Cut
	Ctc A B C D	2#12 2#8 Triax 17-22 X Y 0 4.57 6.32 0 0 -4.57 -6.32 0				Max. thickness panel for receptacle: Typ Dim ØA ØA	1
	-					SOURIAU shall not be lia due to a use of the P the Specifications issued I (professional rec	iable for a Products v by either
N						PN: 8	Courr FF 3D017
							omposi
<u> </u>					SCALE NA SOUI		lerances: ±
	Н	G	F	E	FORMAT A3 D		URIAU D017X

