т Q	m		0	σ		
Z'						
			LAYOUT SHOW	N AS EXAMPLE		
Key	ying Shown as example					
CHARACTERISTICS	Connector dimension					
-Standard : Based on MIL-DTL-38999 Series III -Shell Material : Composite -Shell Plating : Nickel -Insulator : Thermoplastic -Contacts : Copper Alloy -Seals & Grommet : Silicon Elastomer	DimNominalØS29.4 MaxZ'31.5 MaxVV THREADM18x1-6g		SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.)			
-Seals & Grommet : Silicon Elastomer -Contact Plating : Gold over copper Alloy 0.8µm minimum					& Control List Listed	
-Durability : 500 Mating cycles -Delivered without Souriau contacts			PN: 8D513M03PNL			
-Temperature Range : -65°C to +200°C		A 18-10-2016	6 First Release			
-Salt Spray : 2000 hours		ISS DATE Designed By:	Latest modification - by Date:	CUS	TOMER DRAWING	MOD N°
		TITLE	TITLE Composite Plug 8D series			
BASIC SERIES: 8D 5 - 13 M 03 F SHELL TYPE : Plug with RFI Shielding - 13 M 03 F	P N L Delivered W/O Contacts	SCALE NA	General I Toleran	ces:	IPRDS / PROJECT 859	
CONTACT TYPE : Standard Crimp Contact SHELL SIZE : 13	ORIENTATION : N CONTACT TYPE : PIN(500 Matings)	SOURIAU This document is the property of SOURIAU it must not be reproduced or communicated without permission			or	
PLATING : M = Nickel	CONTACT LAYOUT : 13-03	FORMAT A3		IAU DRG N° 3M03PNL-C		SHEET
			0031			-, -

r	Ξ	G	н т	m	D		C	
		Contact Layout						
4		03						
	Ctc A	3#16 13-03 X Y 2.39 1.47						
ω	B C	0 -2.79 -2.39 1.47						
	F						SOURIAU shall not due to a use of the Specifications is:	the Products v sued by either
∨								Coun FR 8D513I
						DATE	rst Release Latest modification - Date:	- _{by} Comp
_ _					SCALE NA SOUF		∃⊕ www.s	General linear Tolerances: ±
				_	FORMAT A3			SOURIAU 8D513N

G


Н

F

Е

D

С

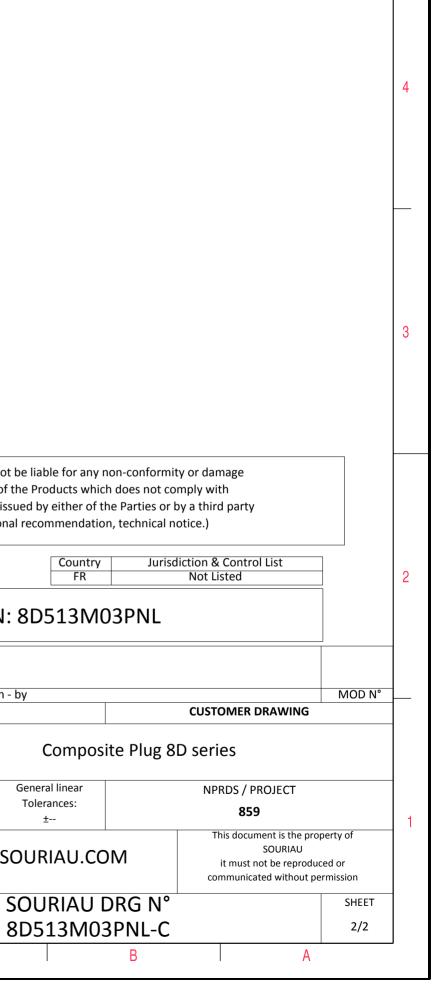

 \triangleright

σ