

L6R20 Series**20W Wall Mount Power Supply**

- DOE Level VI Efficiency Rating
- RoHS Compliant
- Safety Approvals: UL/cUL 62368-1
- Input Protection
- Compact Size



Model No.*	Application	Output Connector	Output Voltage	Load (A)			Voltage Accuracy	Ripple Noise	Line Reg.	Load Reg.
				Min	Rated	Peak				
L6R20-050U	ITE	USB Type A	+5.0V	0	3.00	—	±5%	50mVpp	± 1%	± 5%
L6R20-050	ITE	Corded 5.5mm x 2.1mm x 9.5mm DC plug	+5.0V	0	3.00	—	±5%	50mVpp	± 1%	±5%
L6R20-059	ITE		+5.9V	0	3.00	—	±5%	60mVpp	± 1%	±5%
L6R20-075	ITE		+7.5V	0	2.67	—	±5%	75mVpp	± 1%	±5%
L6R20-090	ITE		+9.0V	0	2.22	—	±5%	90mVpp	± 1%	± 5%
L6R20-120	ITE		+12.0V	0	1.67	—	±5%	120mVpp	± 1%	± 5%
L6R20-150	ITE		+15.0V	0	1.33	—	±5%	150mVpp	± 1%	± 5%
L6R20-180	ITE		+18.0V	0	1.11	—	±5%	180mVpp	± 1%	± 5%
L6R20-240	ITE		+24.0V	0	0.83	—	±5%	240mVpp	± 1%	± 5%
L6R20-300	ITE		+30.0V	0	0.67	—	±5%	240mVpp	± 1%	± 5%
L6R20-360	ITE		+36.0V	0	0.56	—	±5%	240mVpp	± 1%	± 5%

* Model No. format: L6R20-YYY, where YYY=050 to 360 representing output voltage. Output voltages from 5.0Vdc to 36Vdc are available for Level VI compliance in increments of 0.1V. Please contact Tri-Mag, LLC for the part number and specifications for your output voltage and/or specific output connector requirements and application.

- **Output voltage** is verified to specification at 60% rated load condition.
- **Line Regulation** is defined by changing ± 10% of input voltage from nominal line at rated load.
- **Load Regulation** is defined by changing ± 40% of measured output load from 60% rated load.
- The ripple and noise is measured by using 20MHz bandwidth limited oscilloscope and terminated each output with a 10 µF electrolytic and a 0.1 µF capacitor at rated load and nominal line.
- **Efficiency** is measured at rated load and nominal line.

L6R20 Series

Approved to UL/cUL 62368-1, the **L6R20 Series** is an economical and dependable whether powering stationary or portable devices.

This DOE Level VI compliant power supply/charger is rated up to 20W, with plenty of voltage levels to

choose from: 5.0Vdc to 36Vdc (in increments of 0.1V), to match your specific need.

Call us at (414-649-4200) for the part number to match your particular need.

Specifications

Input

Input Voltage	• 90 VAC ~ 264 Vac
Input Frequency	• 47 Hz to 63 Hz
Input Current	• 1.2A Max.
Inrush Current	• 40A Max.
Leakage Current	• 0.25mA Max.

Output

Output Voltage Range	• 5.0 ~ 36Vdc
Output Current Range	• 600 - 3000mA, 20.0W Max.
Minimum Load	• No min. load required.
Line Regulation	• $\pm 1\%$ at rated load across input voltage range.
Ripple & Noise	• 100mVp-p Max.
Overvoltage Protection	• Auto recovery
Overload Protection	• Auto recovery
Short Circuit Protection	• Auto recovery
Output Power Range	• 0-20W

General

Insulation Resistance	• 50M Ω Min.
Efficiency	• Level VI compliant
Standby Power	• 0.1W Max
Leakage Current	• 0.25mA Max

Environmental

Operating Temperature	• 0°C to 40°C
Operating Humidity	• 5% - 95% RH, Non-Condensing
Storage Temperature	• -20°C to +80°C
Cooling	• Convection
Humidity	• 5~95%RH (non-condensing)
Temperature Coefficient	• 0.05%/°C

EMC & Safety

Safety Approvals	• UL/cUL 62368-1
EMC Approvals:	• FCC



Warranty

Warranty Period	• 3 years
-----------------	-----------

Dimensions

Size	• 59.0 x 40.9 x 26.5 mm 2.32 x 1.61 x 1.04 Inches
Tolerance	• ± 0.2 mm
Weight	• Approx. 100g (3.5 oz.)
Connectors	• AC input, US 2-prong inlet plug • DC output, standard 5.5mm x 2.1mm x 9.5mm corded dc output jack or USB output option or per customer specification.
Cord Length	• 1500 \pm 20mm (59 \pm .8")

Mechanical Drawing

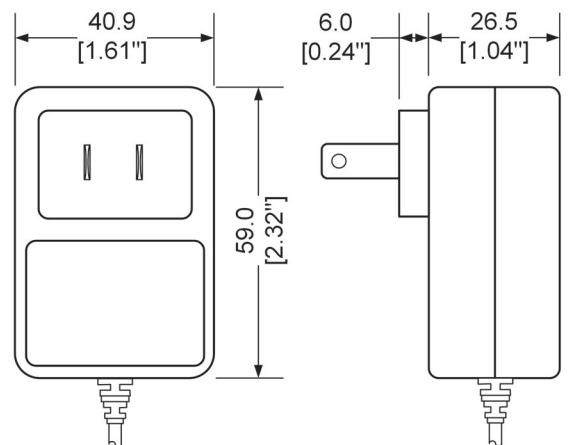

Output Connection Diagram: