



(1)

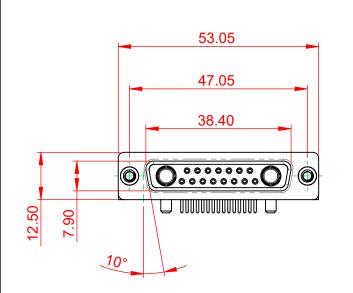



NOTES:


MATERIAL:	
HOUSING:	
SHELL:	
CONTACT:	

OPERATING TEMPERATURE:

.XX ±0.13

.XXX ±0.05

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, TIN PLATED COPPER ALLOY, GOLD FLASH PLATED




POWER/CO-AX CONTACT RATING:	20A (CURRENT)
(IF PRESENT)	, , ,
SIGNAL CONTACT CURRENT RATING:	5A PER CONTACT
SIGNAL CONTACT RESISTANCE:	10mΩ MAX.

INSULATOR RESISTANCE: DIELECTRIC WITHSTANDING VOLTAGE:




1000V AC rms

-55°C ~ 125°C



	COMBINATION D-SUB		SW REFERENCE NO.: 630 COMBO ASSEMBLY			
			DRAWN: C.B	DATE: JAN. 01/20	19	
			CHECKED:	DATE:		
EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2		
	TORONTO, ONTARIO CANADA	SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE	DRAWING NUMBER: 630-17W2240-2T4 IS		ISSUE	
YOUR CONNECTION TO QUALITY & SERVICE	MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	PART NUMBER: 630-17W	2240-2T4	1		





THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.



