
т (G	-m		0	₩	A	
			LAYOUT SHOWN AS EX	AMPLE		
	Keying Shown as example					
CHARACTERISTICS	Connector dimension					
-Standard : Based on MIL-DTL-38999 Series III -Shell Material : Aluminium -Shell Plating : Black Zinc Nickel -Insulator : Thermoplastic -Contacts : Copper Alloy -Seals & Grommet : Silicon Elastomer -Contact Plating : Cold over copper Alloy 0.8um minimum	DimNominalØS41.7 MaxZ31 MaxVV THREADM31x1-6g		SOURIAU shall not be liable for any due to a use of the Products whi the Specifications issued by either of (professional recommendati Country FR	ich does not comply with the Parties or by a third on, technical notice.)	h party Control List	-
-Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories			PN: 8D521Z			
-Temperature Range : -65°C to +175°C -Salt Spray : 500 hours		A 12-10-2016 F	First Release			
-		ISS DATE Designed By:	Latest modification - by Date:	CUSTO	MC MER DRAWING	DD N°
		TITLE	TITLE Aluminium Plug 8D series			
BASIC SERIES: 8D 5 - 21 Z 42 SHELL TYPE : Plug with RFI Shielding	2 P A	SCALE	General linear Tolerances: ±		DS / PROJECT 859	
CONTACT TYPE : Standard Crimp Contact SHELL SIZE : 21	ORIENTATION CONTACT TYPE : PIN(500 Mati	- SOURIAU	WWW.SOURIAU.C	OM iii	is document is the property of SOURIAU t must not be reproduced or imunicated without permission	
PLATING : Z = Black Zinc Nickel	CONTACT LAYOUT : 2:	—	SOURIAU 8D521Z4	DRG N°	SH	HEET
		HJ HJ	XU5717/		1	1/2

	Ξ	۵	г	m	D	0	
4		Contact Layout 42					
	Ctc A B	2#4 Power 21-42 X Y 0 6.19 0 -6.19					
ω							
						SOURIAU shall not be liabl due to a use of the Proo the Specifications issued by (professional recom	ducts wh either o nmendat
N						PN: 8D	Countr FR
					A 12-10-20 ISS DATE Designed By:	16 First Release Latest modification - by Date:	
_					SCALE NA	A Genera Tolera ±-	ances:
					FORMAT	SOUI	riau
	Н	G	F	E	A3 D	8D5	521Z4

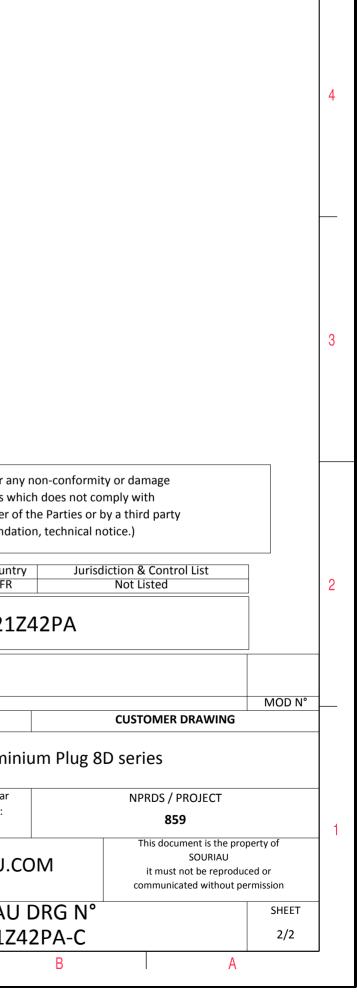

 \triangleright

σ