

THIS IS A C.A.D. GENERATED DRAWING TOLERANCE UNLESS OTHERWISE SPECIFIED DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER	
ORIGINAL	(1)

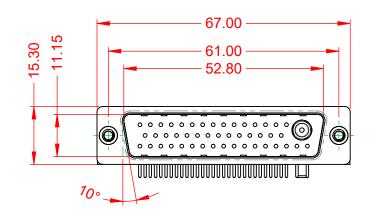



NOTES:


MATERIAL: HOUSING: SHELL: CONTACT:

DIELECTRIC

OPERATING TEMPERATURE:


WITHSTANDING VOLTAGE:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, TIN PLATED COPPER ALLOY, GOLD FLASH PLATED



POWER/CO-AX CONTACT RATING:	30A (CURRENT)
(IF PRESENT)	. ,
SIGNAL CONTACT CURRENT RATING:	5A PER CONTACT
SIGNAL CONTACT RESISTANCE:	10mΩ MAX.
INSULATOR RESISTANCE:	5000MΩ min.


.X ±0.25 .XX ±0.13 .XXX ±0.05



		SW REFERENCE NO.: 629 C	OMBO ASSEMBLY		
	COMBINATION D-SUB		DRAWN: C.B	DATE: JAN. 01/20)19
			CHECKED:	DATE:	
THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.	EDAC INC TORONTO, ONTARIO CANADA YOUR CONNECTION TO QUALITY & SERVICE	OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2
			DRAWING NUMBER: 629-47W1250-314		ISSUE
			PART NUMBER: 629-47W	1250-3T4	1

-55°C ~ 125°C

1000V AC rms



COMPLIANT

