


THIS IS A C.A.D. GENERATED DRAWING TOLERANCE UNLESS OTHERWISE SPECIFIED DO NOT MAKE MANUAL REVISIONS TO MASTER.

| ÅΦ | |
|----|--|
| | |

ISSUE NUMBER


(1)

ORIGINAL



NOTES:

SHELL:

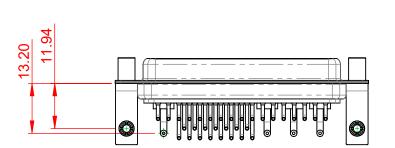

| MATERIAL | |
|----------|--|
| HOUSING. | |

CONTACT:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, TIN PLATED COPPER ALLOY, GOLD FLASH PLATED

OPERATING TEMPERATURE:

.X ±0.25 .XX ±0.13

.XXX ±0.05

POWER/CO-AX CONTACT RATING: 10A (CURRENT) (IF PRESENT) SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT SIGNAL CONTACT RESISTANCE:

INSULATOR RESISTANCE: DIELECTRIC


WITHSTANDING VOLTAGE:

 $10m\Omega$ MAX.

-55°C ~ 125°C

5000MΩ min.

1000V AC rms



| | | SW REFERENCE NO.: 630 COMBO ASSEMBLY | | | |
|---------------------------------------|---|--|------------------------|--------------------|---|
| | | | DRAWN: C.B | DATE: JAN. 01/2019 | |
| | | | CHECKED: | DATE: | |
| | EDAC INC | THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INCAND | SCALE: (IN C.A.D. 1:1) | SHEET 1 OF | 2 |
| EDECINC TORONTO, ONTARIO CANADA | SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE | DRAWING NUMBER: 630-36W4240-1TD | | ISSUE | |
| | YOUR CONNECTION TO QUALITY & SERVICE | MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION. | PART NUMBER: 630-36W | 4240-1TD | 1 |



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

