

TOLERANCE UNLESS OTHERWISE SPECIFICATION DO NOT MAKE MANUAL REVISIONS TO MASTER.





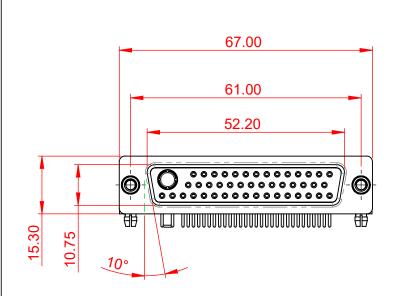



NOTES:

.X ±0.25 .XX ±0.13

.XXX ±0.05


MATERIAL: HOUSING: THERMOPLASTIC POLYESTER, UL94V-0 SHELL: STEEL, TIN PLATED CONTACT: COPPER ALLOY, 30µ GOLD PLATING

OPERATING TEMPERATURE: -55°C ~ 125°C

 $\label{eq:signal_contact_current rating: 5A per contact} $$ Signal contact resistance: 10m $$ Max.$$ INSULATOR RESISTANCE: 5000 $$ Max.$$ DIELECTRIC$$ WITHSTANDING VOLTAGE: 1000V $$ AC rms$$ The second s$


CONTACT CODE 40 POWER CONTACT FOOTPRINT - 13.20mm 40 IS STANDARD AS SHOWN ON SHEETS 3 & 4 CONTACT CODE 50 POWER CONTACT FOOTPRINT - 20.33mm

		SW REFERENCE NO.: 630 COMBO ASSEMBLY			
			DRAWN: C.B	DATE: JAN. 01/20	19
			CHECKED:	DATE:	
	EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INCAND	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	4
	YOUR CONNECTION TO QUALITY & SERVICE	SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWING NUMBER: 630-47W1650-2TD		ISSUE
			PART NUMBER: 630-47W	1650-2TD	1





THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY. UL94V-0

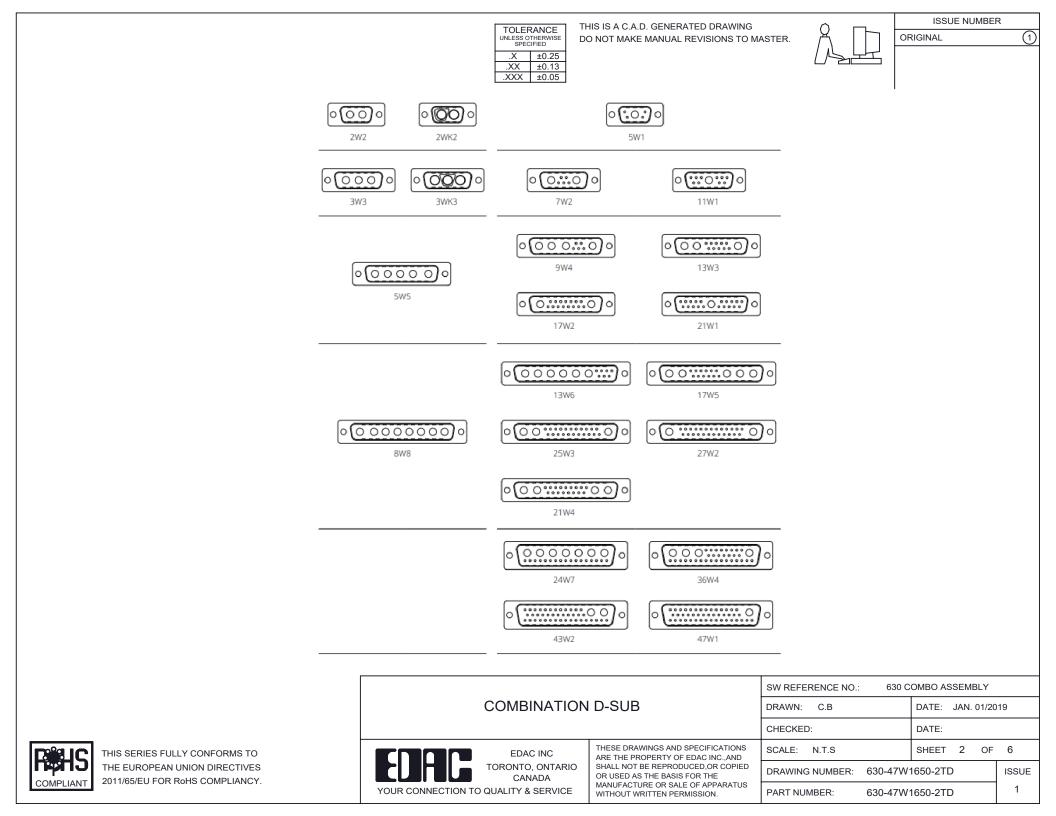



THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER ORIGINAL

 $\overline{(1)}$



3W3 / 3WK3

5W1 Male/Female

7W2 Male/Female

11W1 Male/Female

17W2 Male/Female



21W4 Male/Female



5W5 Male



PCB EDGE

8W8 Male



PCB EDGE




PCB EDGE


PCB EDGE

27W2 Male/Female

5W5 Female




8W8 Female



33,50 9,70 10,50 10,

21W1 Male/Female



		•				
	COMBINATION D-SUB		SW REFERENCE NO.: 630 COMBO ASSEMBLY			
COMBINAT			DATE: JAN. 01/20)19		
			DATE:			
EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC. AND	SCALE: N.T.S	SHEET 3 OF	4		
	OR USED AS THE BASIS FOR THE	DRAWING NUMBER: 630-47W	RAWING NUMBER: 630-47W1650-2TD			
YOUR CONNECTION TO QUALITY & SERVI	E MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	PART NUMBER: 630-47W	1650-2TD	1		

PCB EDGE

CURRENT RATING / ØA 10A / 2.2 20A / 3.3 30A / 3.7 40A / 4.2



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

PCB	EDGE



TOLERANCE UNLESS OTHERWISE SPECIFIED DAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.


















13W3 Male





25W3 Male





24.77


23.3

9.70 16.53 6.51 6.51 6.52

31.75

21.9

36W4 Female

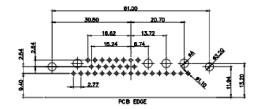

13W6 Male





30.50

2.77

22.16

20.76

20.7

13.72

13W6 Female

13W3 Female

 .X
 ±0.25

 .XX
 ±0.13

 .XXX
 ±0.05

43W2 Female





17W5 Male













PCB EDGE



PCB EDGE



	COMBINATION D-SUB		SW REFERENCE NO.: 630 COMBO ASSEMBLY		
			DRAWN: C.B	DATE: JAN. 01/20)19
			CHECKED:	DATE:	
THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND	SCALE: N.T.S	SHEET 4 OF	4
	TORONTO, ONTARIO CANADA	OR USED AS THE BASIS FOR THE	DRAWING NUMBER: 630-47W	V1650-2TD	ISSUE
COMPLIANT 2011/65/EU FOR RoHS COMPLIANCY.	YOUR CONNECTION TO QUALITY & SERVICE	MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	PART NUMBER: 630-47W	V1650-2TD	1