
<b>エ</b>	Q	п	т	D	0





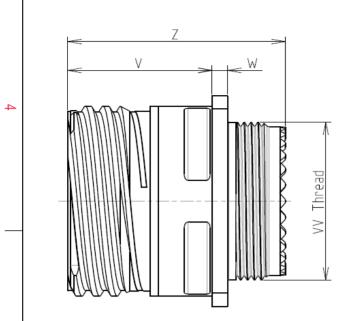

LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 11

SHELL TYPE : Square Flange Receptacle

PLATING : X = Without Plating

Н

CONTACT TYPE : Standard Crimp Contact

-Mass

ယ

 $\sim$ 

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Composite		
-Shell Plating	: Without Plating		
-Insulator	: Thermoplastic		
-Contacts	: Copper Alloy		
-Seals & Grommet	: Silicon Elastomer		
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum		
-Durability	: 500 Mating cycles		
-Delivered with Souriau contacts and Accessories			
-Temperature Range	: -65°C to +175°C		

: 2000 hours

: 13.3 g ± 10%

8D 0

G

11

Х

04

В

F

Е


Dim	Nominal		
Р	3.25±0.2		
PP	4.93±0.2		
R1	20.62		
R2	18.26		
S	26.2±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M15x1-6g		


ORIENTATION : E

CONTACT LAYOUT : 11-04

CONTACT TYPE : SOCKET(500 Matings)

Е



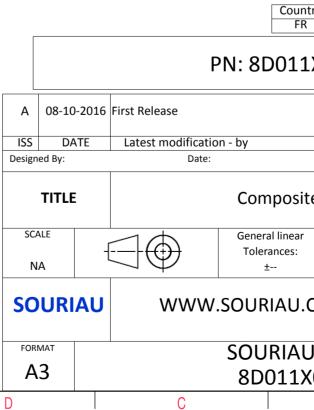

	σ			A		
LS EXA	MPLE					3
any r	non-conformit	v or dar	nage			
whic er of t	any non-conformity or damage which does not comply with of the Parties or by a third party dation, technical notice.)					
Intry R	y Jurisdiction & Control List Not Listed					2
1X04BE						
					MOD N°	
site	customer drawing ite Receptacle 8D series					
ar	NPRDS / PROJECT					
	859					
	.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission					
U DRG N° X04BE-C					SHEET	
	B B			A	-,-	J

_	Ŧ	۵	п –	m	D	0
		Contact Layout				Panel Cuto
4	-×_	$ \begin{array}{c}                                     $			ħ	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
	Shell Arrangement Numt size no. cont size a content no. cont no. cont size a content no. cont size a content no. cont size a content no. content size a content no. content size a content si content size a content si	X-axis         Y-axis (mm)           +0.65 (1.65)         .065 (1.65)           +0.65 (1.65)         .065 (1.65)           -0.65 (1.65)         .065 (1.65)           -0.65 (1.65)         .065 (1.65)           -0.65 (1.65)         .065 (1.65)           -0.65 (1.65)         .065 (1.65)           -0.65 (1.65)         .065 (1.65)           -0.65 (1.65)         .065 (1.65)           -0.65 (1.65)         .065 (1.65)				ØT.
ω						Dim ØA ØAA R1 ØT
						SOURIAU shall not be liable for an due to a use of the Products w the Specifications issued by either o (professional recommenda
2						Count FR
					A 08-10-20 ISS DATE	PN: 8D011
					Designed By:	Latest modification - by Date: Composit
-					SCALE NA	General linear Tolerances: ±
					FORMAT A3	U WWW.SOURIAU. SOURIAL 8D011X
L	Н	G	F	E	D	C

