

т	۵	П	m	0



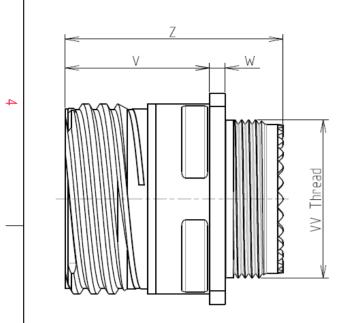

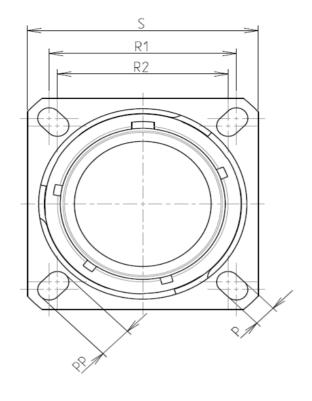

LAYOUT SHOWN AS

Keying Shown as example

Connector dimension

Е

Dim

Nominal

CHARACTERISTICS

Н

ω


-Standard : Based on MIL-DTL-38999 Series III

	Standard - Dasca on r						
\triangleleft		: Aluminium			Р	3.25±0.2	
					РР	4.93±0.2	
	-Shell Plating	: Nickel			R1	26.97	
	-Insulator	: Thermoplastic			R2	24.61	
	-Contacts	: Copper Alloy			S	33.3±0.3	
	-Seals & Grommet	: Silicon Elastomer			V	20.83+0/-1.25	
					W	2.1/2.5	
N	-Contact Plating	: Gold over copper Alloy 0.8µm minimum			Z	31.5 Max	
	-Durability	: 500 Mating cycles			VV THREAD	M25x1-6g	
	-Delivered with Souria	u contacts and Accessories					
	-Temperature Range	: -65°C to +200°C					
	-Salt Spray	: 48 hours					
_	-Mass	: 44.91 g ± 10%					
	BASIC SERIES:	8D 0 - 17 F	75	S C			
_	SHELL TYPE : Square Flange Receptacle						
	CONTACT TYPE : Sta	ndard Crimp Contact				ORIENTA	ATION : C
	SHELL SIZE : 17				CONTA	CT TYPE : SOCKET(500	Matings)
	PLATING : F =	Nickel				CONTACT LAYOU	JT : 17-75

F

G

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recommend

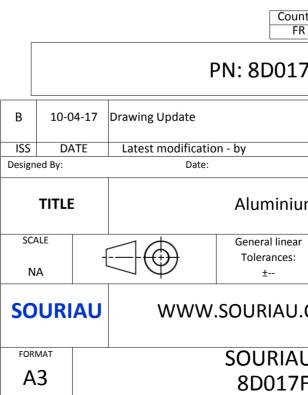

С

В

ISS

D

Φ						
R		4				
AS EXAMPLE		3				
ndation, technica	comply with or by a third party	2				
.7F75SC						
	CUSTOMER DRAWING	DD N°				
um Recepta	NPRDS / PROJECT 859					
.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission						
U DRG N 7F75SC-C		IEET				
B	A	·				

	工	۵	н гт	m	D	0	
		Contact Layout					Panel Cuto
4		75				SQUARE FLANGE RECEPTA REAR MOUNTI	ACLE (TYPE O)
	Ctc A B	2#8 Triax 17-75 X Y 0 4.75 0 -4.75				Max. thickness panel f	ØA ØA
ω							Dim ØA ØAA R1 ØT
	_						hall not be liable for a use of the Products v
2						the Specificat	tions issued by either fessional recommend Coun
							PN: 8D017
					ISS Designed By		cation - by ate:
_					SCALE NA		General linear Tolerances:
					SOU	RIAU WW	W.SOURIAU.
			1		A3		SOURIAU 8D017F
	Н	G	l F	E	D	C	

