


—	D G	н п	m	O

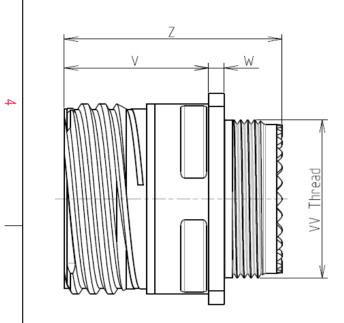

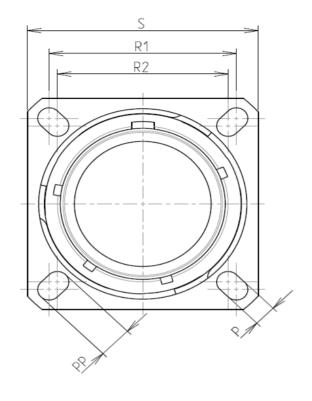



LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

ယ

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 17

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : W = Olive drab Cadmium

-Standard : Based on MIL-DTL-38999 Series III

ł	-Shell Material	: Aluminium	
	-Shell Plating	: Olive drab Cadmium	
	-Insulator	: Thermoplastic	
	-Contacts	: Copper Alloy	
	-Seals & Grommet	: Silicon Elastomer	
	-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum	
	-Durability	: 500 Mating cycles	
	-Delivered with Souriau contacts and Accessories		
	-Temperature Range	: -65°C to +175°C	
	-Salt Spray	: 500 hours	
1			

: 33.62 g ± 10%

8D 0

G

17

W

75

А


F

С

Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
PP	4.93±0.2		
R1	26.97		
R2	24.61		
S	33.3±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M25x1-6g		

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recomment

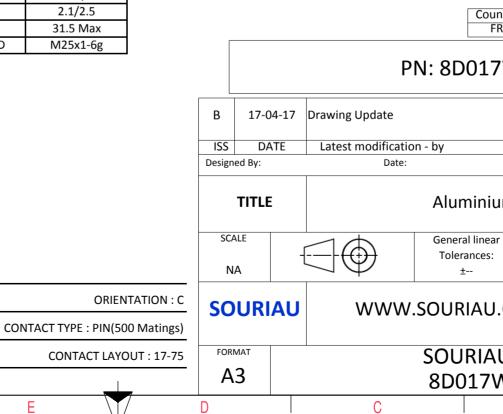

Φ	⊳				
		4			
IS EXAMPLE		3			
any non-conformit which does not content of the Parties or b adation, technical not untry Jurisd R 7W75AC	mply with by a third party	2			
	MOD N°				
	customer drawing				
ar	NPRDS / PROJECT 859 1				
.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission					
U DRG N°	SHEET 1/2				
W75AC-C B	A				

	Ŧ	G	г П	m	D	0	
		Contact Layout					Panel Cuto
4		75 () ()			ά	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING	
	Ctc A B	2#8 Triax 17-75 X Y 0 4.75 0 -4.75			<u>.</u>	Max. thickness panel for receptacle: Ty	_Ø⊺ ype 0: front m
ى						Dim ØA ØAA R1 ØT	\
	\vdash					SOURIAU shall not be li due to a use of the P	
N						the Specifications issued (professional rec	by either
					B 17-04-	PN: 8	D017
					ISS DATI Designed By: TITLE	Date:	uminiu
<u> </u>					SCALE NA SOURIA		eral linear lerances: ±
				_	FORMAT A3	SO	URIAU 0017V
·	Н	G	F	E	D	С	

