
	т — т		0			
	ØS					
			LA	YOUT SHOWN AS EXAMPLE		
	Keying Shown as example					
CHARACTERISTICS -Standard : Based on MIL-DTL-38999 Series III	Connector dimension Dim Nominal	7				
-Shell Material : Composite -Shell Plating : Olive drab Cadmium -Insulator : Thermoplastic -Contacts : Copper Alloy	ØS         41.7 Max           Z'         31.5 Max           VV THREAD         M31x1-6g		SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.)			
-Seals & Grommet : Silicon Elastomer -Contact Plating : Gold over copper Alloy 0.8μm minimum				Country Juris FR	diction & Control List Not Listed	
-Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories			PN: 8D521J11BC			
-Temperature Range <sub>:</sub> -65°C to +175°C		Α	06-10-2016 First Release			
-Salt Spray       : 2000 hours         -Mass       : 57.9 g ± 10%		ISS			CUSTOMER DRAWING	MOD N°
			TITLE	Composite Plug 8		
BASIC SERIES: 8D 5 - 21 5 SHELL TYPE : Plug with RFI Shielding	J 11 B C			General linear Tolerances: ±	NPRDS / PROJECT <b>859</b>	
CONTACT TYPE : Standard Crimp Contact			URIAU WWW	SOURIAU.COM	This document is the prop SOURIAU it must not be reproduce	ed or
	CONTACT TYPE : SOCKET(	ouu iviatings)			communicated without per	mission
SHELL SIZE : 21 PLATING : J = Olive drab Cadmium	CONTACT LA	YOUT : 21-11	RMAT	SOURIAU DRG N°		SHEET

r	Ŧ	۵	н <b>г</b>	m		0	
		Contact Layout					
4	-x -	$ \begin{array}{c}                                     $					
	B         + 306 (7.77)           C         + 348 (8.84)           D         + 227 (5.77)           E         + 000 (0.00)           F         - 227 (5.77)           Shell         Arrangement no.         Nu<	Y-axis (mm)         position ID         X-axis (mm)         Y-axis (mm)           +.332 (8.43)         G        348 (8.84)        061 (1.55)           +.177 (4.50)         H        306 (7.77)         +.177 (4.50)          061 (1.55)         J        121 (3.07)         +.322 (8.43)          270 (6.86)         K         +.000 (0.00)         +.123 (3.12)          353 (8.97)         L         +.000 (0.00)        115 (2.92)          270 (6.86)	s				
w							
	1						
	F					SOURIAU shall not be liable for an due to a use of the Products w the Specifications issued by either o (professional recommenda	
N						Count FR	
						PN: 8D521	
						16 First Release	
_					ISS DATE Designed By:	Latest modification - by Date:	
					TITLE	Comp	
<u> </u>					SCALE	General linear Tolerances:	
					SOURIA	OURIAU WWW.SOURIAU.	
					FORMAT A3	SOURIAL 8D521J	
l	Н	G	F	E	D	C	

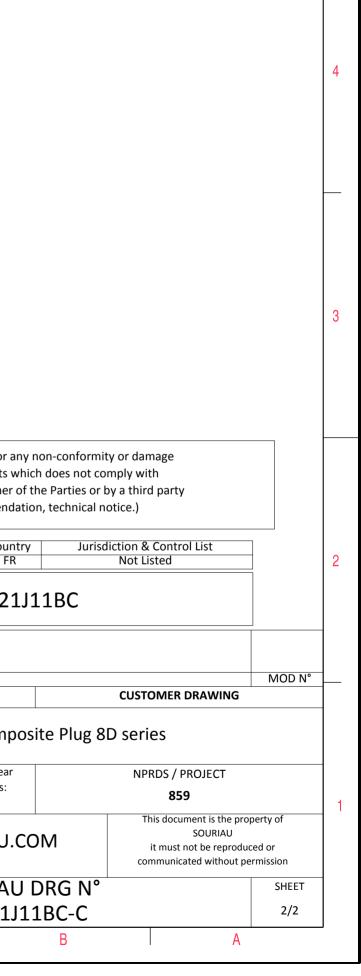

 $\triangleright$ 

σ