




- EP13 Design
- Operating Temperature: 40°C ~ +130°C including temp rise

Electrical Specifications @ 25°C				
INDUCTANCE	LEAKAGE(L) 1-3	DCR (CH-502A) (Max)	HI-POT TEST	URNS RATIO ±1V
200KHz/1V HP-4284A	200KHz/1.0V HP-4284A	1 - 3 : 31mOhm, 9 - 6 : 58mOhm	PRI TO SEC: DC 2250V 3mA for 2 Sec	9-6 : 10-7 : 1-3 : 4-5
1 - 3	(shorted pins 4,5,6,7,9,10)	10 - 7 : 58mOhm, 4 - 5 : 180mOhm	COIL TO CORE: DC 600V 3mA for 2 Sec	1 : 1 : 1.33 : 0.89
21uH 10%	0.3uH Max.			

All specifications subject to change without notice.

### MECHANICAL

DIMENSIONS:  $\frac{\text{inch}}{\text{(mm)}}$

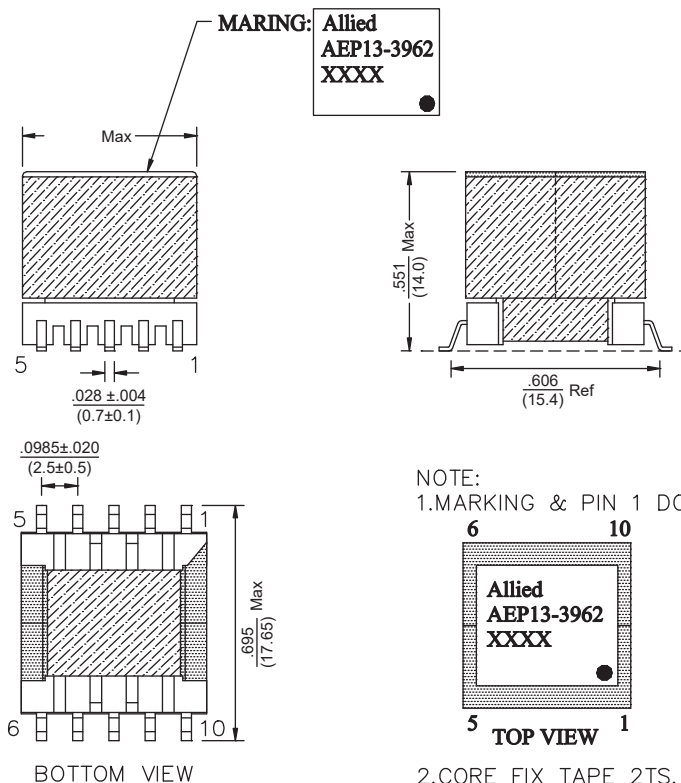

### SCHEMATIC

