

RONDA-REC-90-C

~80° rectangular beam with holder C compatible with LEDiL HEKLA


TECHNICAL SPECIFICATIONS:

Dimensions	Ø 53.9 mm
Height	16.6 mm
Fastening	socket
Colour	clear
Box size	
Box weight	0 kg
Quantity in Box	420 pcs
ROHS compliant	yes ⓘ


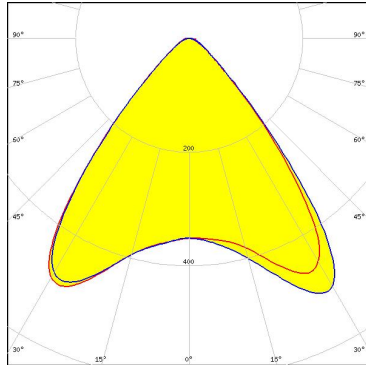

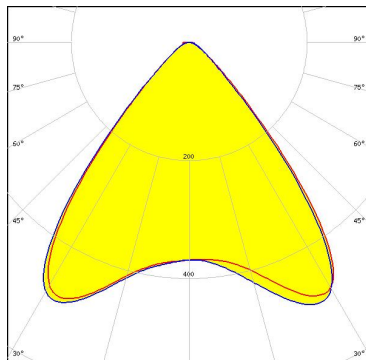

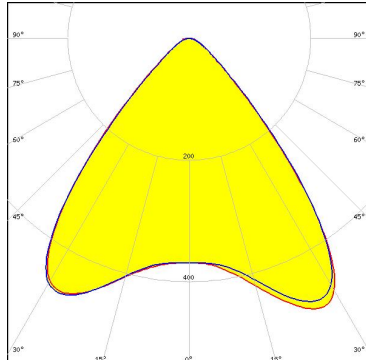
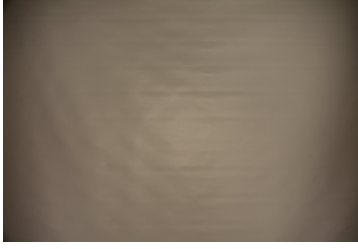
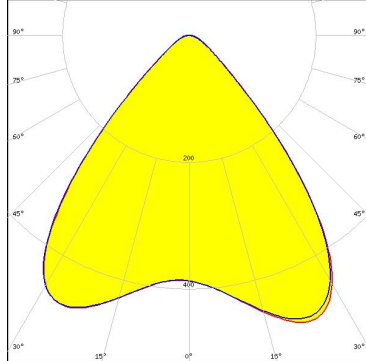


MATERIAL SPECIFICATIONS:









Component	Type	Material	Colour
RONDA-REC-90	Single lens	PMMA	clear
RONDA-HLD-C	Holder	PC	

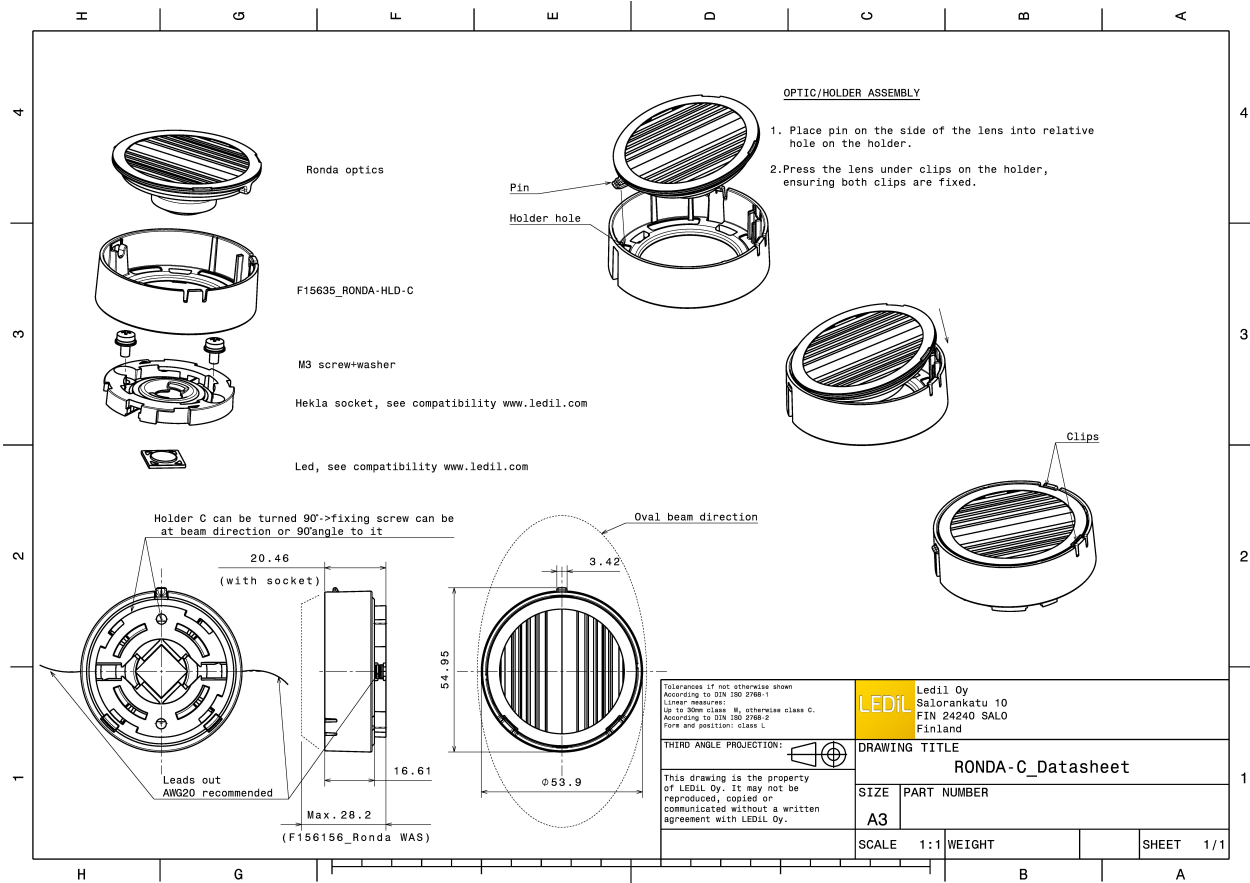

PHOTOMETRIC DATA (MEASURED):

<p>bridgelux.</p> <p>LED V4 HD</p> <p>FWHM 85.0°</p> <p>Efficiency 92 %</p> <p>Peak intensity 0.700 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components: F15253_HEKLA-SOCKET-A</p>		
<p>bridgelux.</p> <p>LED V6 Gen6</p> <p>FWHM 84.0°</p> <p>Efficiency 92 %</p> <p>Peak intensity 0.650 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components: F15253_HEKLA-SOCKET-A</p>		
<p>bridgelux.</p> <p>LED V6 HD</p> <p>FWHM 85.0°</p> <p>Efficiency 91 %</p> <p>Peak intensity 0.620 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components: F15255_HEKLA-SOCKET-C</p>		
<p>bridgelux.</p> <p>LED V9 HD</p> <p>FWHM 85.0°</p> <p>Efficiency 89 %</p> <p>Peak intensity 0.600 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components: F15859_HEKLA-SOCKET-I</p>		


PHOTOMETRIC DATA (MEASURED):
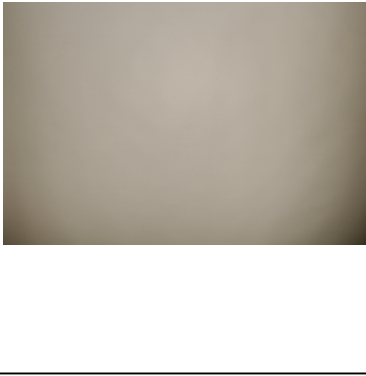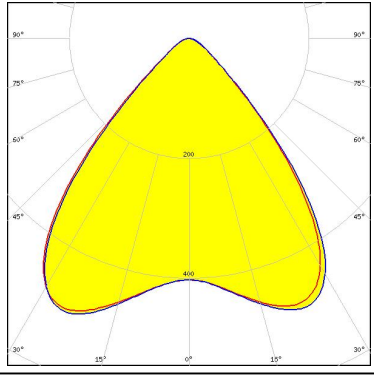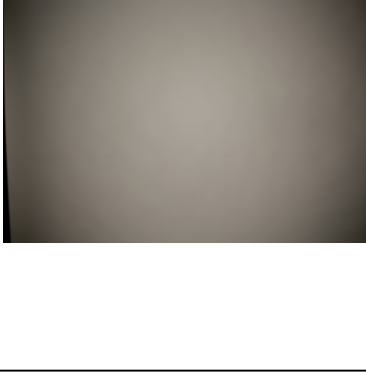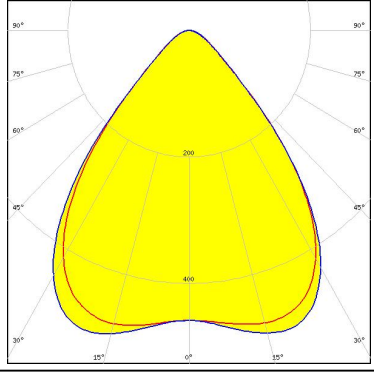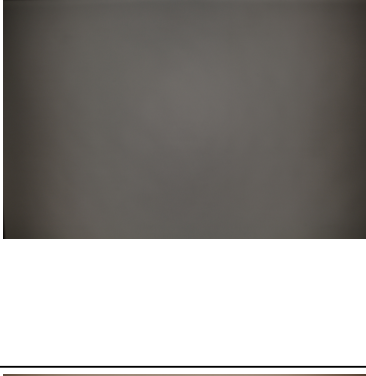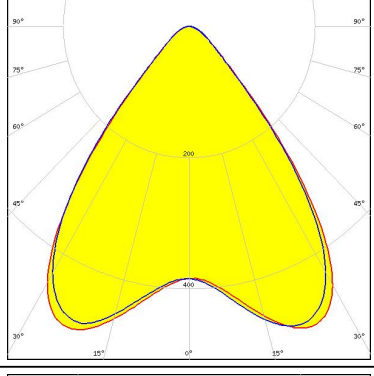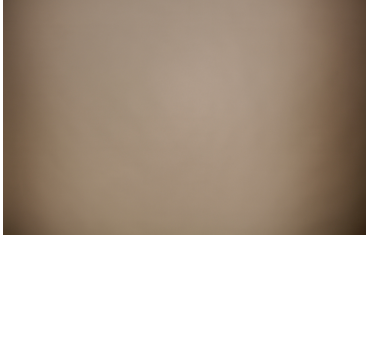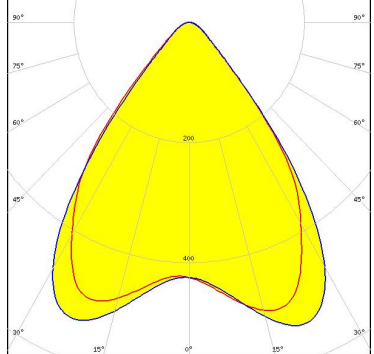
<p>bridgelux.</p> <p>LED VERO10</p> <p>FWHM 85.0°</p> <p>Efficiency 90 %</p> <p>Peak intensity 0.560 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components: F15616_HEKLA-SOCKET-F</p>		
<p>bridgelux.</p> <p>LED Vesta TW 13mm (25W) CSP</p> <p>FWHM 82.0°</p> <p>Efficiency 85 %</p> <p>Peak intensity 0.510 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components: C16142_HEKLA-SOCKET-K Bender Wirth: 492 Typ L8</p>		
<p>bridgelux.</p> <p>LED Vesta TW 9mm (12W) CSP</p> <p>FWHM 82.0°</p> <p>Efficiency 86 %</p> <p>Peak intensity 0.580 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components: C16142_HEKLA-SOCKET-K</p>		
<p>CITIZEN</p> <p>LED CLC020 Series (Dim-To-Warm)</p> <p>FWHM 80.0°</p> <p>Efficiency 85 %</p> <p>Peak intensity 0.580 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components: C16142_HEKLA-SOCKET-K</p>		

PHOTOMETRIC DATA (MEASURED):


CITIZEN

LED CLL02x/CLU02x (LES10)
 FWHM 84.0°
 Efficiency 89 %
 Peak intensity 0.550 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 F15255_HEKLA-SOCKET-C

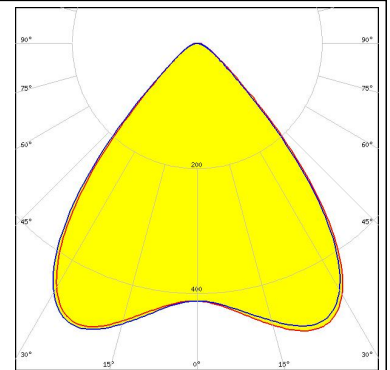



CITIZEN

LED CLU700/701
 FWHM 83.0°
 Efficiency 90 %
 Peak intensity 0.640 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 F15255_HEKLA-SOCKET-C

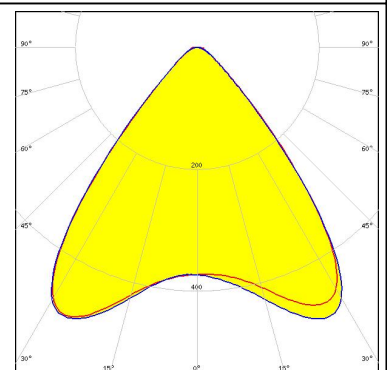



CITIZEN

LED LCN-C01B (Tunable White)
 FWHM 81.0°
 Efficiency 86 %
 Peak intensity 0.560 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 C16142_HEKLA-SOCKET-K
 Bender Wirth: 481 Typ L8

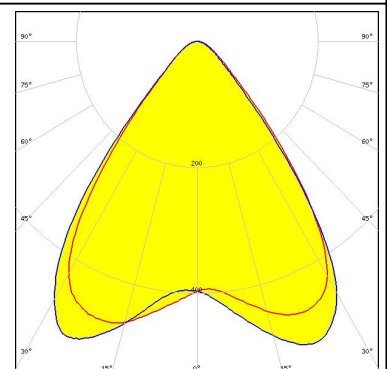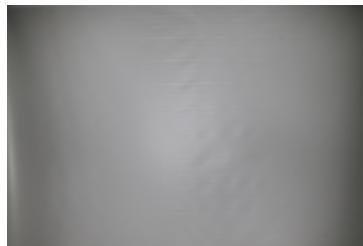

CREE



LED CMA1516
 FWHM 86.0°
 Efficiency 92 %
 Peak intensity 0.500 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 F15256_HEKLA-SOCKET-D

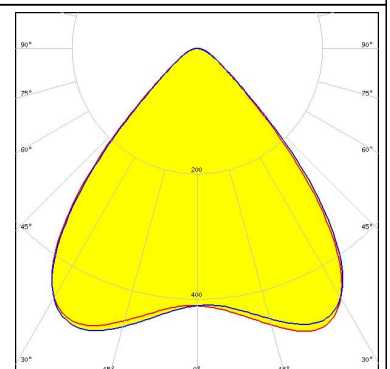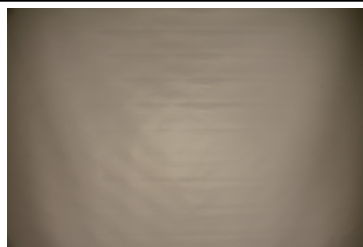

PHOTOMETRIC DATA (MEASURED):



CREE

LED CMA1825
 FWHM 86.0°
 Efficiency 90 %
 Peak intensity 0.490 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 F15254_HEKLA-SOCKET-B

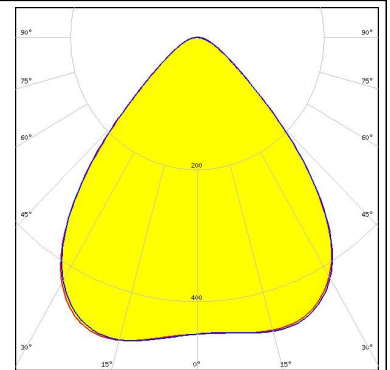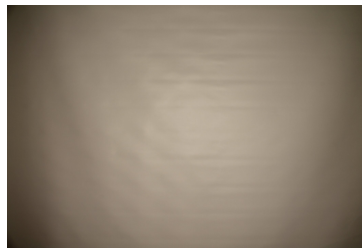



CREE

LED CMT14xx
 FWHM 86.0°
 Efficiency 91 %
 Peak intensity 0.500 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 F15255_HEKLA-SOCKET-C

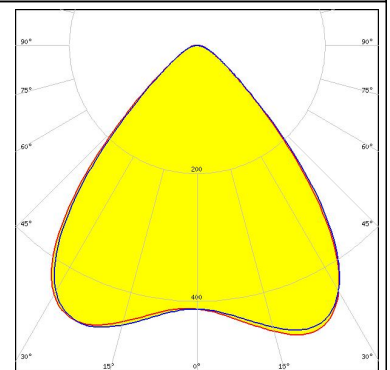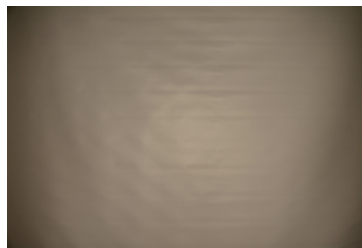



CREE

LED CMT19xx
 FWHM 82.0°
 Efficiency 88 %
 Peak intensity 0.519 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 F15859_HEKLA-SOCKET-I

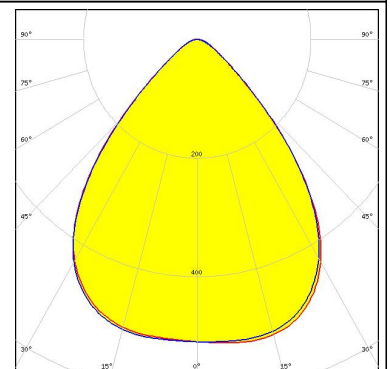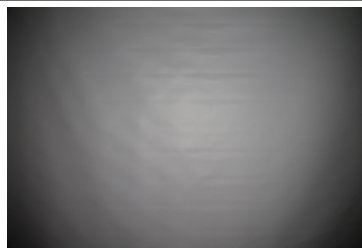

CREE


LED CXA/B 13xx
 FWHM 84.0°
 Efficiency 91 %
 Peak intensity 0.600 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 F15956_HEKLA-SOCKET-J

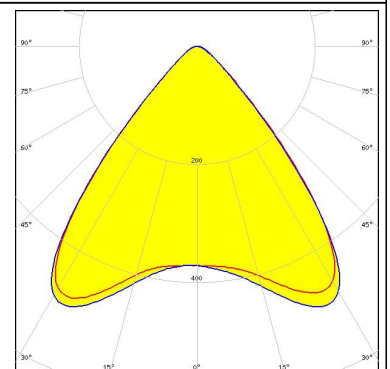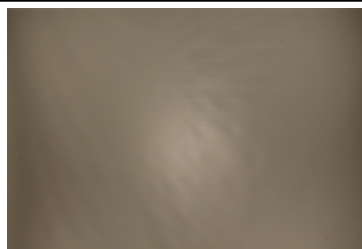



PHOTOMETRIC DATA (MEASURED):





LED CXA/B 15xx
 FWHM 85.0°
 Efficiency 91 %
 Peak intensity 0.560 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 F15256_HEKLA-SOCKET-D

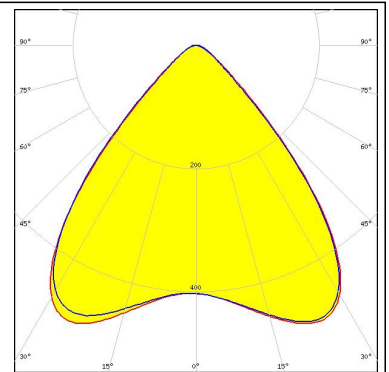



LED LUXEON CoB 1202HD
 FWHM 85.2 + 85.4°
 Efficiency 91 %
 Peak intensity 0.580 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 F15848_HEKLA-SOCKET-G

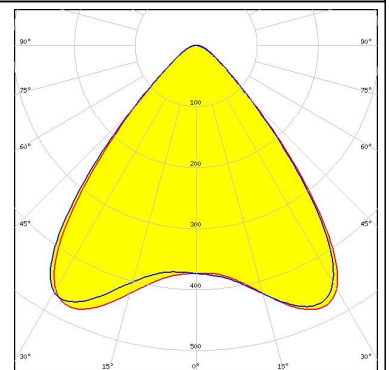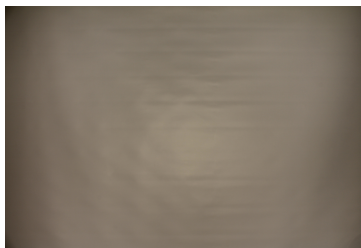


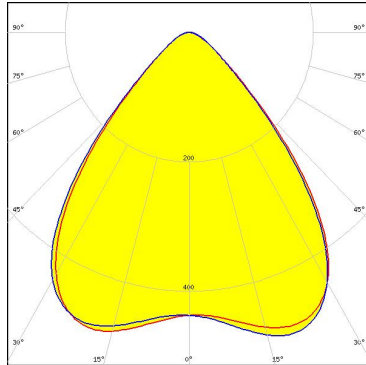

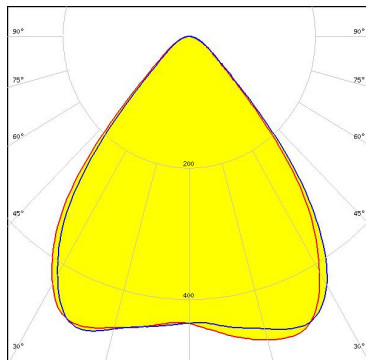

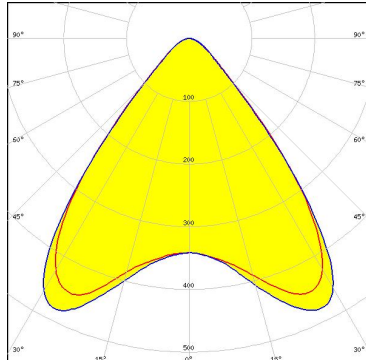

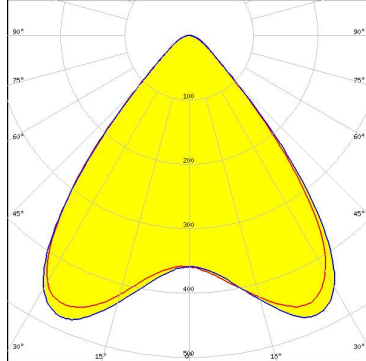
LED LUXEON CoB 1202s
 FWHM 84.0°
 Efficiency 91 %
 Peak intensity 0.620 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 F15848_HEKLA-SOCKET-G

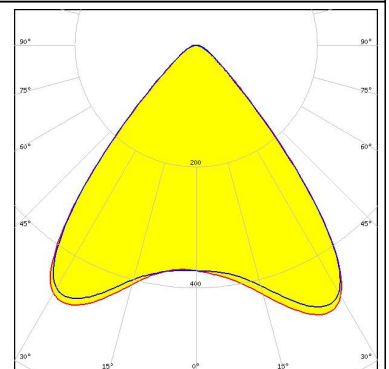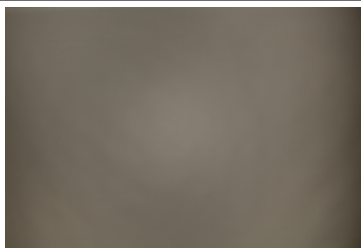


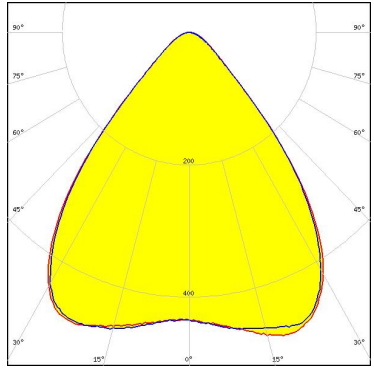
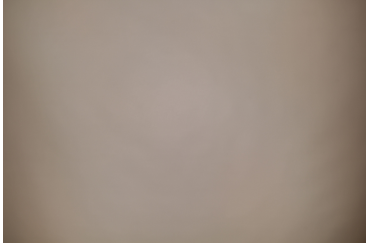
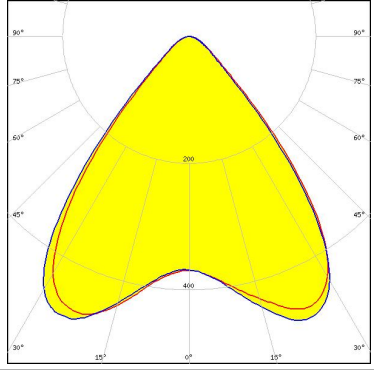
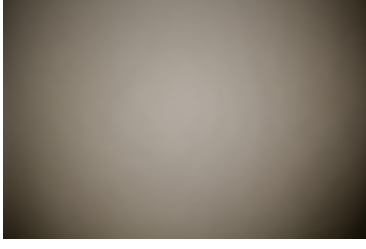
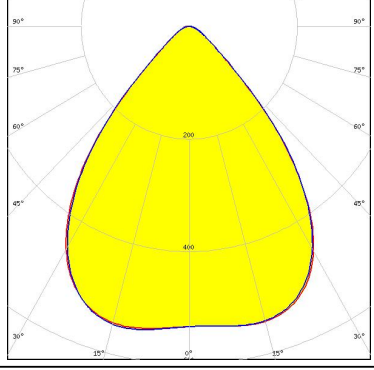
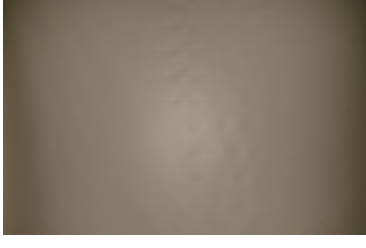
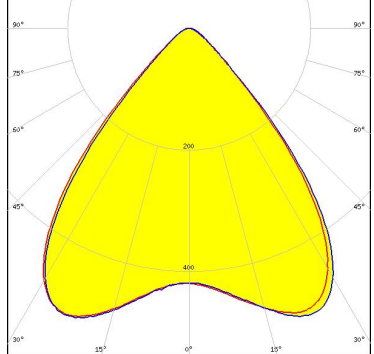
LED LUXEON CoB 1204HD
 FWHM 85.8 + 85.7°
 Efficiency 91 %
 Peak intensity 1.800 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 F15858_HEKLA-SOCKET-H

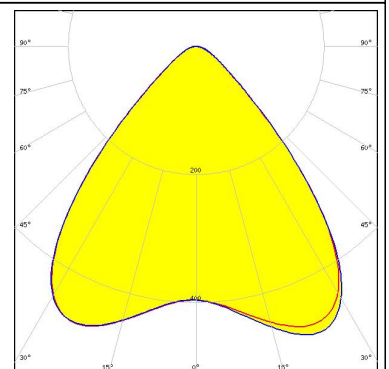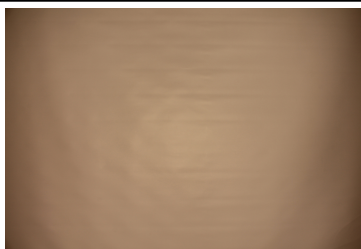


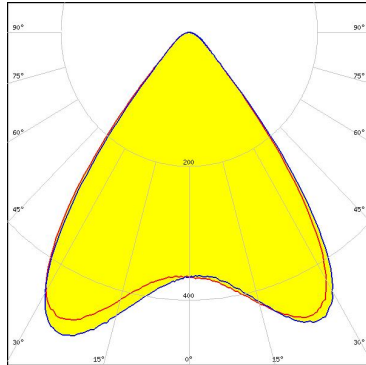
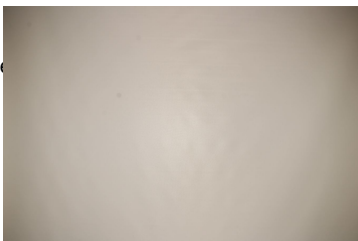
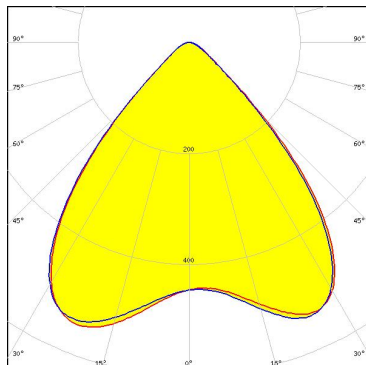
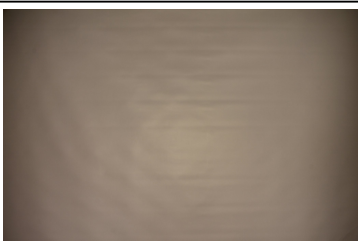
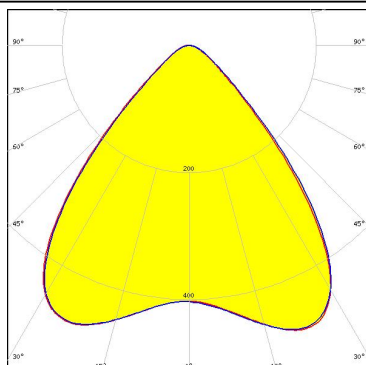
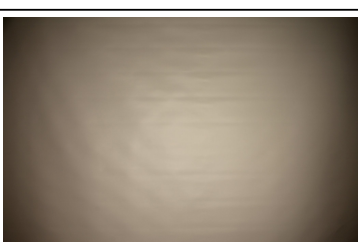
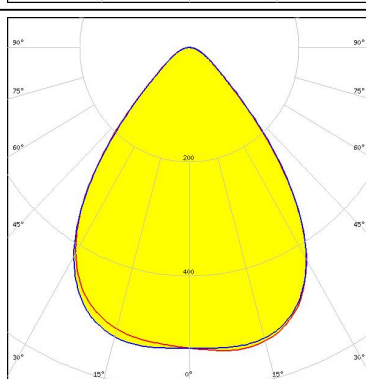
PHOTOMETRIC DATA (MEASURED):

<p>LUMILEDS</p> <p>LED LUXEON CoB 1205HD FWHM 75.3 + 75.4° Efficiency 90 % Peak intensity 0.510 cd/lm LEDs/each optic 1 Light colour White Required components: F15858_HEKLA-SOCKET-H</p>		
<p>LUMINUS</p> <p>LED CDM-14 (Dim-To-Warm) FWHM 83.0° Efficiency 82 % Peak intensity 0.500 cd/lm LEDs/each optic 1 Light colour White Required components: C16142_HEKLA-SOCKET-K Bender Wirth: 491 Typ L8</p>		
<p>LUMINUS</p> <p>LED CDM-6 (Dim-To-Warm) FWHM 82.0° Efficiency 86 % Peak intensity 0.620 cd/lm LEDs/each optic 1 Light colour White Required components: C16142_HEKLA-SOCKET-K Bender Wirth: 490 Typ L8</p>		
<p>LUMINUS</p> <p>LED CDM-9 (Dim-To-Warm) FWHM 83.0° Efficiency 86 % Peak intensity 0.560 cd/lm LEDs/each optic 1 Light colour White Required components: C16142_HEKLA-SOCKET-K Bender Wirth: 490 Typ L8</p>		

PHOTOMETRIC DATA (MEASURED):

<p>LUMINUS</p> <p>LED CTM-14 (Tunable White) FWHM 82.0° Efficiency 82 % Peak intensity 0.490 cd/lm LEDs/each optic 1 Light colour White Required components: C16142_HEKLA-SOCKET-K Bender Wirth: 442 Typ L8</p>		
<p>LUMINUS</p> <p>LED CTM-9 (Tunable White) FWHM 83.0° Efficiency 86 % Peak intensity 0.560 cd/lm LEDs/each optic 1 Light colour White Required components: C16142_HEKLA-SOCKET-K Bender Wirth: 495 Typ L8</p>		
<p>LUMINUS</p> <p>LED CxM-14 (19x19) FWHM 81.0° Efficiency 87 % Peak intensity 0.550 cd/lm LEDs/each optic 1 Light colour White Required components: F15859_HEKLA-SOCKET-I</p>		
<p>LUMINUS</p> <p>LED CxM-9 (13.5x13.5) FWHM 83.0° Efficiency 90 % Peak intensity 0.570 cd/lm LEDs/each optic 1 Light colour White Required components: F15255_HEKLA-SOCKET-C</p>		


PHOTOMETRIC DATA (MEASURED):

<p>NICHIA</p> <p>LED NJCWL024Z-V1MT: COB L-Type Tunable White</p> <p>FWHM 84.0°</p> <p>Efficiency 83 %</p> <p>Peak intensity 0.600 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components: C16142_HEKLA-SOCKET-K Bender Wirth: 497 Typ L8</p>		
<p>NICHIA</p> <p>LED NVCWJ024Z-V1MT: COB J-Type Tunable White</p> <p>FWHM 84.0°</p> <p>Efficiency 87 %</p> <p>Peak intensity 0.550 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components: C16142_HEKLA-SOCKET-K Bender Wirth: 498 Typ L8</p>		
<p>PHILIPS</p> <p>LED Fortimo SLM L09 CoB</p> <p>FWHM 85.0°</p> <p>Efficiency 90 %</p> <p>Peak intensity 0.540 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components: F15858_HEKLA-SOCKET-H</p>		
<p>PHILIPS</p> <p>LED Fortimo SLM L13 CoB</p> <p>FWHM 78.0°</p> <p>Efficiency 86 %</p> <p>Peak intensity 0.540 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components: C16142_HEKLA-SOCKET-K Bender Wirth: 432 Typ L8</p>		

PHOTOMETRIC DATA (MEASURED):



PHILIPS

LED Fortimo SLM L13 CoB
 FWHM 78.0°
 Efficiency 86 %
 Peak intensity 0.540 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 C16142_HEKLA-SOCKET-K
 Bender Wirth: 432 Typ L8

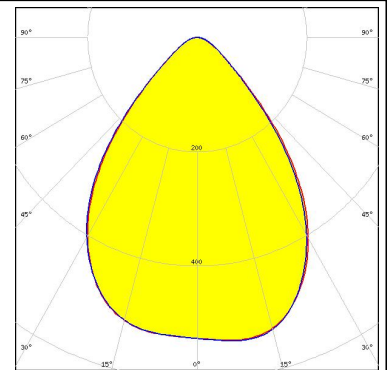


SAMSUNG

LED COB D Series LES 14.5 mm
 FWHM 81.0°
 Efficiency 87 %
 Peak intensity 0.540 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 F15859_HEKLA-SOCKET-I

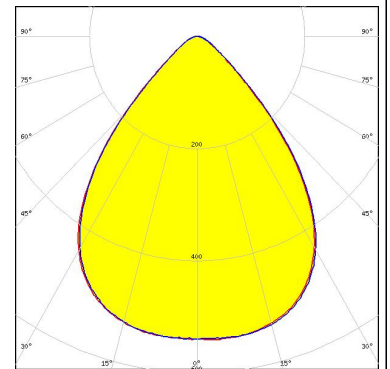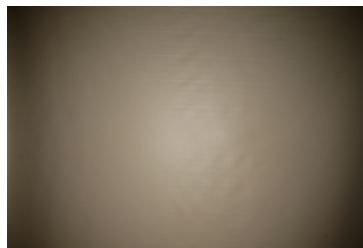


SAMSUNG

LED COB D Series LES 9.8 mm
 FWHM 84.0°
 Efficiency 91 %
 Peak intensity 0.560 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 F15255_HEKLA-SOCKET-C

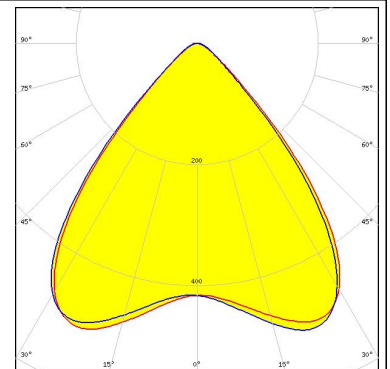

SAMSUNG


LED LC010C
 FWHM 85.0°
 Efficiency 90 %
 Peak intensity 0.600 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 F15848_HEKLA-SOCKET-G

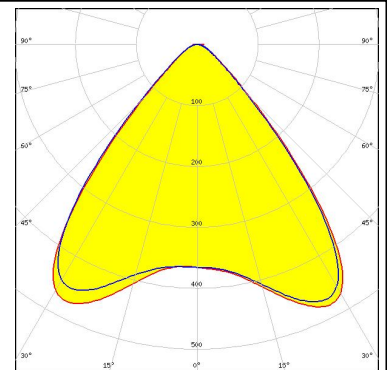

PHOTOMETRIC DATA (MEASURED):



SAMSUNG

LED LC010C G2
 FWHM 82.0°
 Efficiency 90 %
 Peak intensity 0.660 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 F15255_HEKLA-SOCKET-C

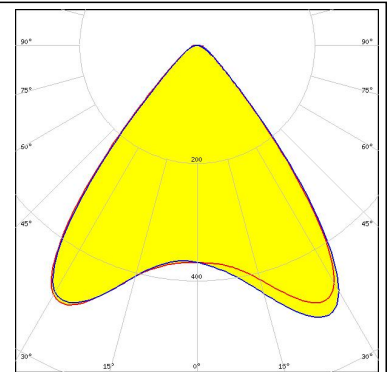


SAMSUNG

LED LC020C
 FWHM 85.0°
 Efficiency 91 %
 Peak intensity 0.570 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 F15848_HEKLA-SOCKET-G

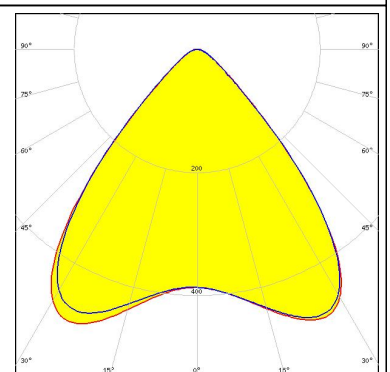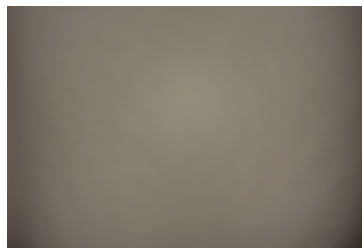



SAMSUNG

LED LC020C G2
 FWHM 80.0°
 Efficiency 89 %
 Peak intensity 0.564 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 F15859_HEKLA-SOCKET-I

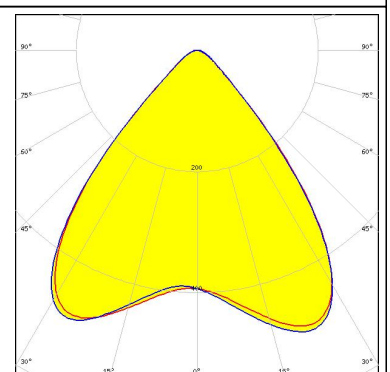
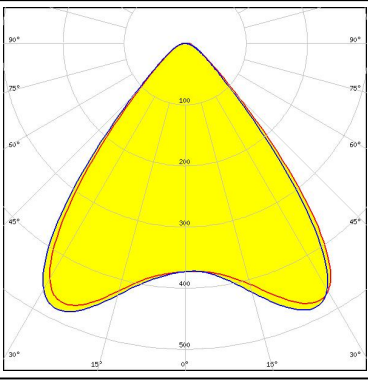

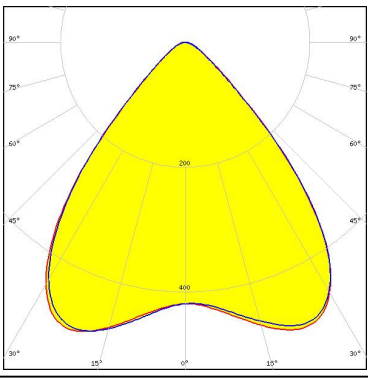

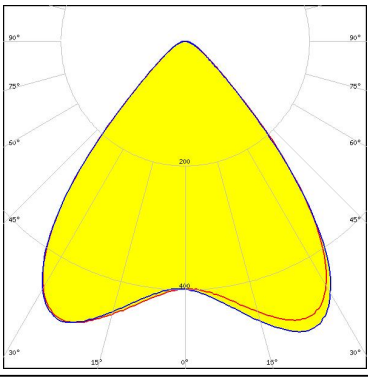

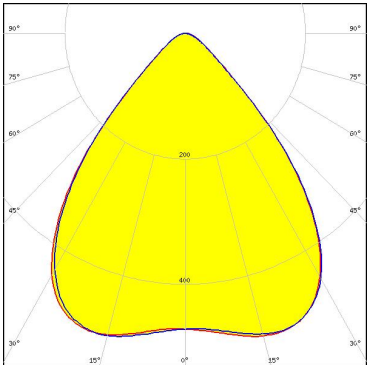


SEOUL SEMICONDUCTOR

LED MJT COB LES 14.5
 FWHM 81.0°
 Efficiency 87 %
 Peak intensity 0.540 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 F15859_HEKLA-SOCKET-I

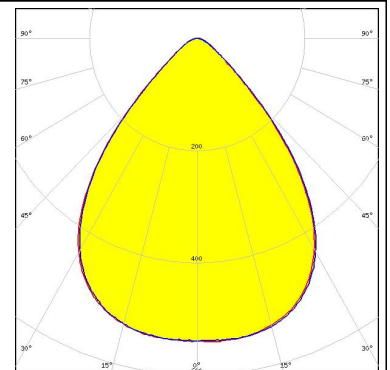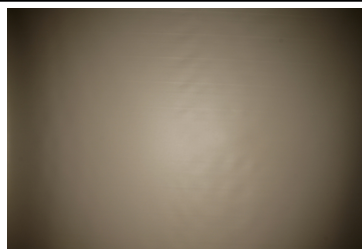


PHOTOMETRIC DATA (MEASURED):

<p>SEOL SEOUL SEMICONDUCTOR</p> <p>LED MJT COB LES 6 FWHM 83.0° Efficiency 89 % Peak intensity 0.600 cd/lm LEDs/each optic 1 Light colour White Required components: F15255_HEKLA-SOCKET-C</p>		
<p>SEOL SEOUL SEMICONDUCTOR</p> <p>LED MJT COB LES 9.8 FWHM 84.0° Efficiency 89 % Peak intensity 0.530 cd/lm LEDs/each optic 1 Light colour White Required components: F15255_HEKLA-SOCKET-C</p>		
<p>TRIDONIC</p> <p>LED SLE G7 LES09 FWHM 84.0° Efficiency 90 % Peak intensity 0.570 cd/lm LEDs/each optic 1 Light colour White Required components: F15255_HEKLA-SOCKET-C</p>		
<p>TRIDONIC</p> <p>LED SLE G7 LES13 FWHM 84.0° Efficiency 87 % Peak intensity 0.500 cd/lm LEDs/each optic 1 Light colour White Required components: F15859_HEKLA-SOCKET-I</p>		

PHOTOMETRIC DATA (MEASURED):



TRIDONIC

LED SLE G7 LES15
 FWHM 81.0°
 Efficiency 87 %
 Peak intensity 0.500 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 F15859_HEKLA-SOCKET-I

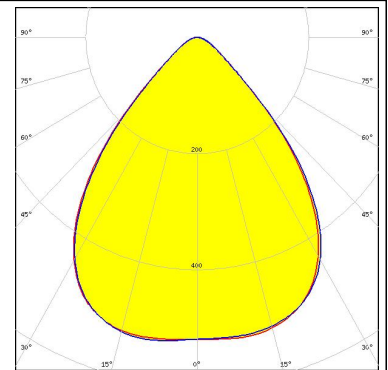


XICATO

LED XOB 14.5 mm
 FWHM 82.0°
 Efficiency 87 %
 Peak intensity 0.521 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 F15859_HEKLA-SOCKET-I

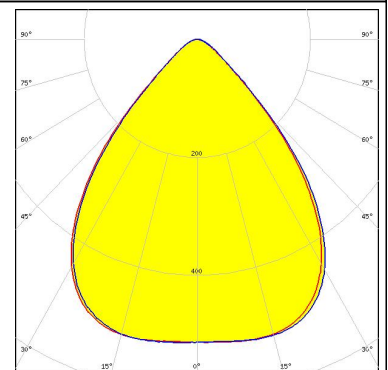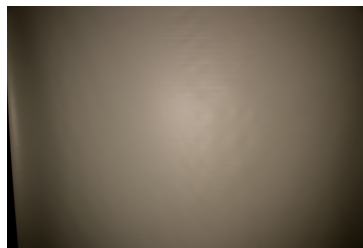



XICATO

LED XOB 9.8 mm
 FWHM 80.0°
 Efficiency 90 %
 Peak intensity 0.559 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 F15255_HEKLA-SOCKET-C

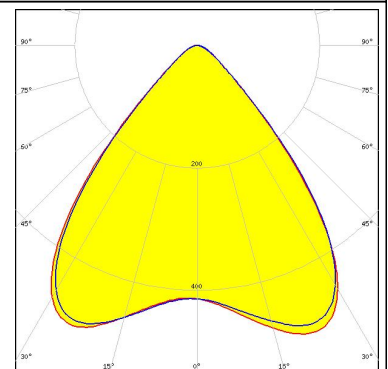

XICATO


LED XTM - 19mm LES
 FWHM 76.0°
 Efficiency 87 %
 Peak intensity 0.580 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 C16058_XTM-ADAPTER-50-C

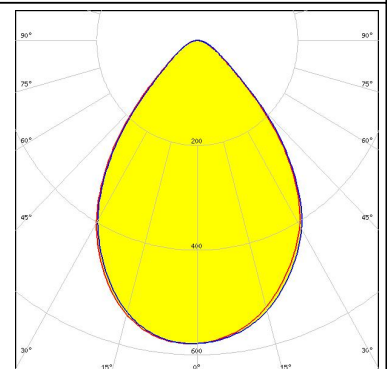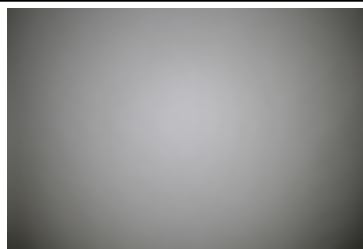


PHOTOMETRIC DATA (SIMULATED):



LED COB T-Type
FWHM 68.0 + 74.0°
Efficiency 85 %
Peak intensity 0.650 cd/lm
LEDs/each optic 1
Light colour White
Required components:
F15848_HEKLA-SOCKET-G

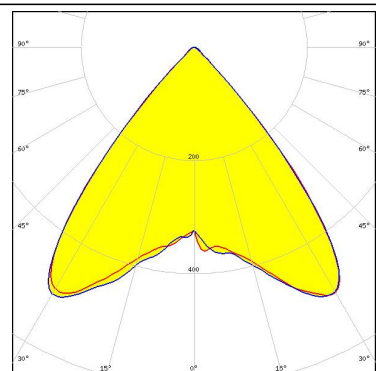

LED SLE G6 LES10
FWHM 74.0 + 76.0°
Efficiency 85 %
Peak intensity 0.550 cd/lm
LEDs/each optic 1
Light colour White
Required components:
F15255_HEKLA-SOCKET-C

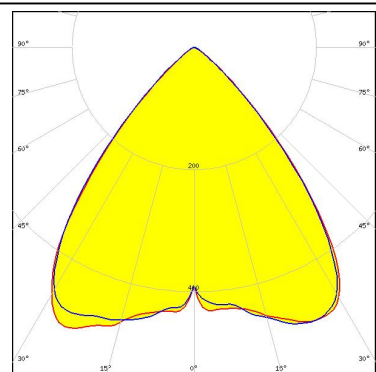

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

Due to use of high power COB's with this product, special attention to proper thermal design is highly recommended. LEDiL has no liability for direct, indirect or consecutive damages arising from the LEDiL products being used outside of the recommended temperature range.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 13
FI-24240 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Local sales and technical support

www.ledil.com/where_to_buy

Shipping locations

Salo, Finland
Hong Kong, China

Distribution Partners

www.ledil.com/where_to_buy