





ISSUE NUMBER	
ORIGINAL	1

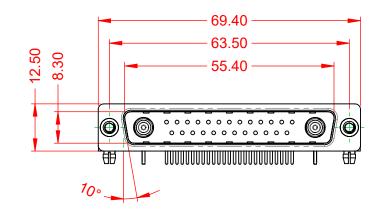




NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, NICKEL PLATED COPPER ALLOY, 30µ" GOLD PLATED




OPERATING TEMPERATURE:	-55°C ~ 125°C
POWER/CO-AX CONTACT RATING: (IF PRESENT)	50Ω (IMPEDANC
SIGNAL CONTACT CURRENT RATING: SIGNAL CONTACT RESISTANCE:	5A PER CONTA 10mΩ MAX.
INSULATOR RESISTANCE:	5000MΩ min.

.XX ±0.13 .XXX ±0.05

DIELECTRIC WITHSTANDING VOLTAGE: ICE)

ACT

1000V AC rms



	COMBINATION D-SUB		SW REFERENCE NO.: 629 COMBO ASSEMBLY		
CON			DRAWN: C.B	DATE: JAN. 01/20	19
			CHECKED:	DATE:	
	EDAC INC	TO, ONTARIO ANADA	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2
	ONTO, ONTARIO CANADA		2640-5N3	ISSUE	
YOUR CONNECTION TO QUALI	O QUALITY & SERVICE		PART NUMBER: 629-27W	2640-5N3	1



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

