


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J.S.T. AND SHALL NOT BE USED OR SHOWN WITHOUT WRITTEN PERMISSION.

4		3		2		1	
ITEM	CONNECTOR PART NO.	DESCRIPTION	IPI CHECK	EOR CHECK	Applicable Tooling		
1	SACH-003G-P0.2	ACH CONNECTOR CONTACT			APPLICATOR		
2	UL1571 (spec OD), 28 AWG	WHITE					

Applicable Housings	
NO. OF CIRCUITS	HOUSING PART NO.
1	ACHR-01V-A-S
2	ACHR-02V-S
3	ACHR-03V-S
4	ACHR-04V-A-S
5	ACHR-05V-A-S

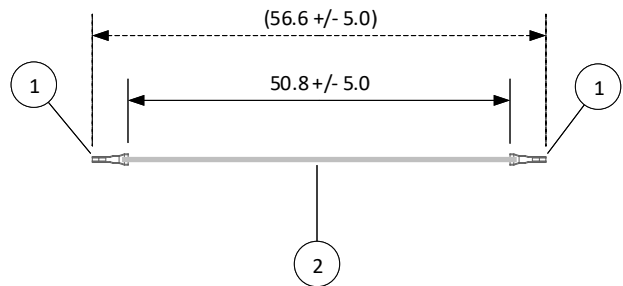

Electrical Specifications
Current: 2.0A (1~3 circuits) AC/DC
Current: 1.5A (4, 5 circuits) AC/DC
Voltage: 50V AC/DC



A		B		C		D	
SCALE		CUSTOMER NAME		CUSTOMER PART NO.			
1: 1							
DIMENSIONS		DESCRIPTION					
All dimensions are in MM with a tolerance of +/- 3.0 unless otherwise specified.		1.2 mm Pitch ACH Series Standard Leads - 2" Inside Length DOUBLE-END LEADS					
DRAWN BY		ASSEMBLY PART NO.					
STEVEN PILKINGTON		ASACHSACH28W51					
CHECKED BY		DRAWING NO. & REVISION		REVISED			
JUSTIN BAKER		GAM-043		3/7/2016			
1		4		3		2	
REV.	DESCRIPTION	DATE	BY				