



NO:RL-148PRODUCT:G3PA, G32A-A Solid State RelaysDATE:September 2015TYPE:Modification Notice

G3PA/G32A-A Series Solid-state Relays will be Modified with VDE Standard Registration Number Marking

Effective Date: March 2016 production


Reason for Modification: Adding the VDE standard registration number makes these relays more competitive in the marketplace.

Affected Parts

Models	Specification
G3PA-210B-VD	DC5-24V
G3PA-220B-VD	DC5-24V
G3PA-240B-VD	DC5-24V
G3PA-260B-VD	DC5-24V
G3PA-420B-VD	DC12-24V
G3PA-430B-VD	DC12-24V
G3PA-420B-VD-2	DC12-24V
G3PA-430B-VD-2	DC12-24V
G3PA-435B-VD-2	DC12-24V
G32A-A10-VD	DC5-24V
G32A-A20-VD	DC5-24V



Marking Changes

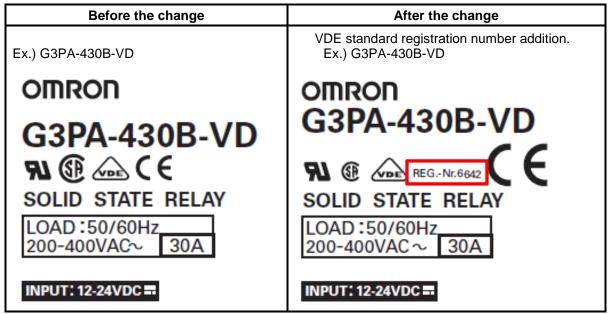

Marking Changes

Before the change	After the change
G32A-A10-VD,-A20-VD only	G32A-A10-VD,-A20-VD only CE Marking size and design change only.
CE Marking size: Height about 3 mm.	CE Marking size: Height about 5 mm.
Ex.) G32A-A10-VD	Ex.) G32A-A10-VD
OMRON G32A-A10-VD	OMRON G32A-A10-VD
POWER DEVICE	POWER
CARTRIDGE	CARTRIDGE
For GE CE	
G3PA-210B-VD	G3PA-210B-VD
LOAD: 50/60Hz 24-240VAC ~ 10A	LOAD: 50/60Hz 24-240VAC ~ 10A
INPUT: 5-24VDC	INPUT: 5-24VDC

Specifications in this product news are as of the issue date and are subject to change without notice. Only main changes in specifications are described in this document. Please be sure to read the relevant catalogs, datasheets, product specifications, instructions, and manuals for precautions and necessary information when using products.