

T	G	П	m	0



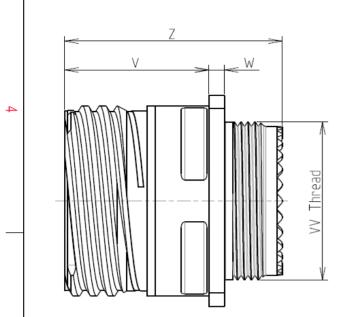

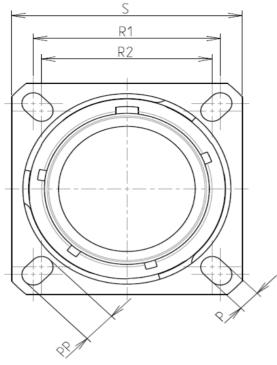

Keying Show

CHARACTERISTICS

ω

 \sim

_

-Mass

BASIC SERIES:

SHELL SIZE : 11

PLATING : S = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Stainless Steel
-Shell Plating	: Nickel
-Insulator	: Thermoplastic
-Contacts	: Copper Alloy
-Seals & Grommet	: Silicon Elastomer
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum
-Durability	: 500 Mating cycles
-Delivered with Souriau	contacts and Accessories
-Temperature Range	-65°C to +200°C
-Salt Spray	: 500 hours

: 39.36 g ± 10%

8D 0

G

11

-

S

02

А

F

Connector dimension				
Dim	Nominal			
Р	3.25±0.2			
PP	4.93±0.2			
R1	20.62			
R2	18.26			
S	26.2±0.3			
V	20.83+0/-1.25			
W	2.1/2.5			
Z	31.5 Max			
VV THREAD	M15x1-6g			

Π		0	œ	Þ	
S R1 R2 V					4
		LAYOUT S	HOWN AS EXAMPLE		3
Connector dimension Dim Nominal P 3.25±0.2 PP 4.93±0.2 R1 20.62 R2 18.26 S 26.2±0.3 V 20.83+0/-1.25 W 2.1/2.5 Z 31.5 Max VV THREAD M15x1-6g		due to a use of the the Specifications issued (professional re	FR	mply with y a third party	2
		PN: 8	3D011S02AD		
	A 07-10-2016 ISS DATE Designed By:	First Release Latest modification - by Date:		CUSTOMER DRAWING	MOD N°
	TITLE	Stai	nless Steel Recepta	cle 8D series	
D	SCALE -		neral linear blerances: ±	NPRDS / PROJECT 859	
ORIENTATION : D CONTACT TYPE : PIN(500 Matings)	SOURIAU	WWW.SOL	JRIAU.COM	This document is the pro SOURIAU it must not be reprodu	ced or
CONTACT TYPE : PIN(SOU Matings) CONTACT LAYOUT : 11-02	FORMAT A3		URIAU DRG N° D011S02AD-C	communicated without po	SHEET 1/2
E	D	C	B	A	

ſ	Ŧ	G	н П	m	D	0
		Contact Layout				Panel Cutou
4	-,	.095 (2.41mm)			2	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
	P	Contacts (Insert arrangement 11-2) contact Contact location (mm) Contact location (mm) ID X-axis (mm) Y-axis (mm) A +.095 (2.41) +.000 (.00) B 095 (2.41) +.000 (.00) ent Number of contacts Size contacts Service rating locat Contacts 2 16 I Al	tact Ion		¥.	Dim
ယ						ØA ØAA R1 ØT
	+					SOURIAU shall not be liable for any due to a use of the Products wh the Specifications issued by either of (professional recommendat
N						PN: 8D0115
					A 07-10-201 ISS DATE Designed By:	Latest modification - by Date:
_					SCALE NA	General linear Tolerances:
					FORMAT A3	J WWW.SOURIAU.C SOURIAU 8D011S0
L	Н	G	F	E	D	C

