



| | |
|--------|--------|
| P1,P2: | M-269E |
| P3: | M-438A |
| P4: | M-323C |

Customer No: No.1

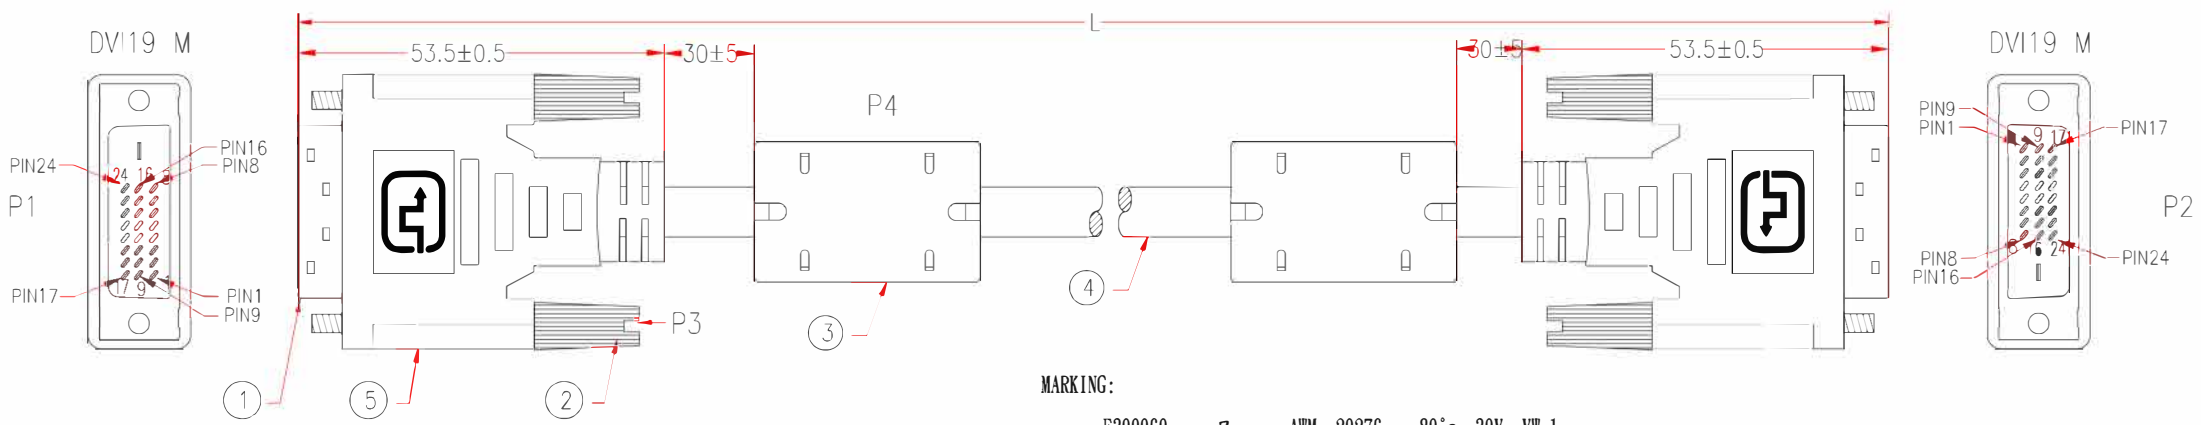

MARKING:

E300060 ρ AWM 20276 80°C 30V VW-1
 CSA 204790 I/II A 80°C 30V FT1 MSL DVI CABLE

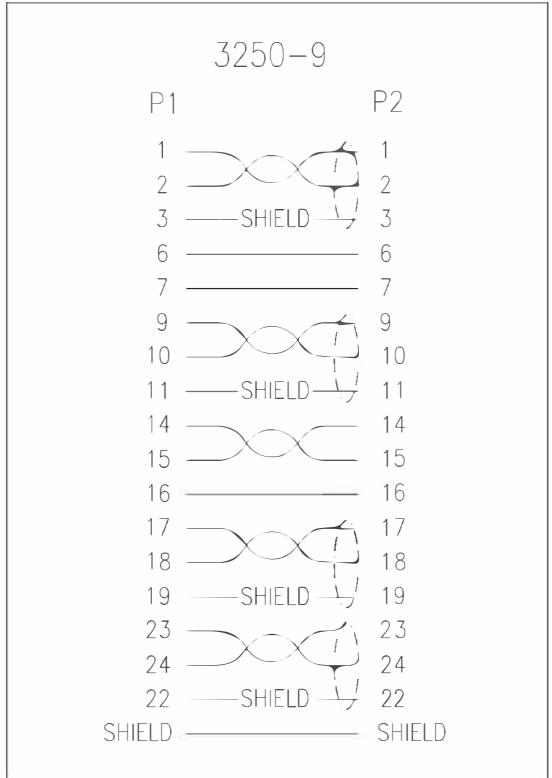

NOTE: All relevant materials are complied with RoHS directive .

| No. | Description | Part No. | Q'TY | Supplier |
|-----|--|----------------|--------|----------|
| 5 | UL1061 26AWG INSULATOR WIRE, LENGTH 28mm, DRAWING No. EHO02601C-013 | H5SE06-0304W01 | 2 | M304 |
| | BLACK HEAT SHRINK TUBE $\phi 0.8 \times 4$ mm | A4HA22-0959 | 8 | M959 |
| | BLACK HEAT SHRINK TUBE $\phi 1.0 \times 20$ mm | A4HA23-0959 | 2 | M959 |
| | BLACK HEAT SHRINK TUBE $\phi 1.5 \times 2$ mm | A4HA24-0959 | 8 | M959 |
| | BLACK HEAT SHRINK TUBE $\phi 2.0 \times 4$ mm | A4HA25-0959 | 8 | M959 |
| | DVI19 TINPLATE | A6GE09-0636 | 2 | M636 |
| | ASSEMBLY PVC BOOT, COLOR BLACK | H1BF01-0304K09 | 2 | M304 |
| 4 | UL20276 [(28AWG*1Pair+D+FAM)*4Pcs+(28AWG*1Pair)+(28AWG*3C)]+AM+AMA BRAID DVI CABLE, OD 7.3mm, JACKET BLACK, DRAWING No. EAAB32804P2801P2803C-289 | H5DF03-0304K09 | L-20mm | M304 |
| 3 | FERRITE CORE 17.5*8.4*28.5mm | A6FA12-1084 | 2 | M1084 |
| | MOLDED PVC BLACK | H1BF01-0304K09 | | M304 |
| 2 | MOLDED THUMBSCREW #4-40, LENGTH 44.25mm, BLACK | A6AE03-0095 | 4 | M95 |
| 1 | DVI19 MALE, GOLD PLATING ON CONTACTS & GOLD CONNECTOR, BLACK INSULATOR | A1QB03-0636 | 2 | M636 |
| No. | | | Q'TY | Supplier |

| | | | |
|----------|----|--|--|
| APPROVED | | | Cable Length Unless Other Spec. Tolerances: 0 ~200mm ± 10 mm 201~1000mm ± 20 mm 1001 ~1500mm ± 25 mm 1501~2100mm ± 30 mm 2100mm↑ ± 40 mm |
| CHECKED | HU | | |
| DRAWING | | | |