



.XX ±0.13 .XXX ±0.05

DO NOT MAKE MANUAL REVISIONS TO MASTER.



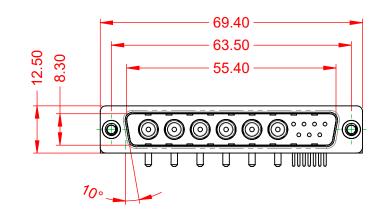




NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:


THERMOPLASTIC POLYESTER, UL94V-0 STEEL, NICKEL PLATED COPPER ALLOY, 30µ" GOLD PLATED



OPERATING TEMPERATURE:	-55°C ~ 125°C
POWER/CO-AX CONTACT RATING: (IF PRESENT)	10A (CURRENT)
SIGNAL CONTACT CURRENT RATING:	5A PER CONTACT
SIGNAL CONTACT RESISTANCE:	10mΩ MAX.
INSULATOR RESISTANCE:	5000MΩ min.
DIELECTRIC	

WITHSTANDING VOLTAGE:

1000V AC rms



			SW REFERENCE NO.: 629 COMBO ASSEMBLY		
	COMBINATION D-SUB	DRAWN: C.B	DATE: JAN. 01/20	19	
			CHECKED:	DATE:	
	EDAC INC TORONTO, ONTARIO YOUR CONNECTION TO QUALITY & SERVICE	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2
			DRAWING NUMBER: 629-13W6640-1NC		ISSUE
			PART NUMBER: 629-13W	6640-1NC	1



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

