





ISSUE NUMBER	
ORIGINAL	1

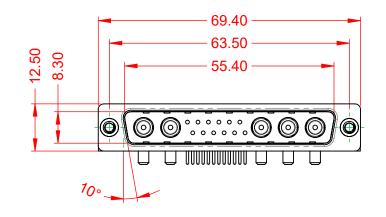




NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, NICKEL PLATED COPPER ALLOY, GOLD FLASH PLATED




OPERATING TEMPE	ERATURE:	-55°C ~ 125°C
POWER/CO-AX COI (IF PRESENT)	NTACT RATING:	20A (CURRENT)
SIGNAL CONTACT		5A PER CONTACT 10mΩ MAX.
INSULATOR RESIS	TANCE:	5000MΩ min.

.XX ±0.13 .XXX ±0.05

WITHSTANDING VOLTAGE:

Т

1000V AC rms



	COMBINATION D-SUB		SW REFERENCE NO.: 629 COMBO ASSEMBLY		
			DRAWN: C.B	DATE: JAN. 01/20	19
			CHECKED:	DATE:	
то	EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INCAND	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2
NCY. CANADA	TORONTO, ONTARIO CANADA	ONTARIO SHALL NOT BE REPRODUCED, OR COPIED DA OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS	DRAWING NUMBER: 629-17W5250-2N4		ISSUE
	YOUR CONNECTION TO QUALITY & SERVICE		PART NUMBER: 629-17W	5250-2N4	1



THIS SERIES FULLY CONFORMS T THE EUROPEAN UNION DIRECTIVE 2011/65/EU FOR RoHS COMPLIANC

