




Color: —

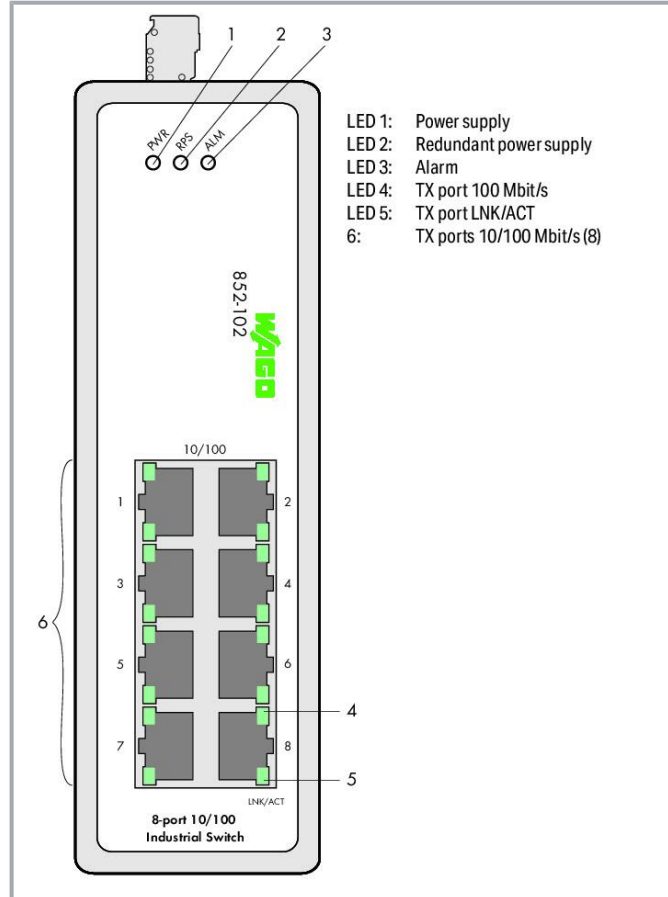

Item description

This unmanaged industrial ETHERNET switch (852-102) has eight Fast ETHERNET ports for easily setting up small- to medium-sized networks. Its slim design paired with a DIN-rail adapter simplifies installation in the control cabinet and provides high vibration and shock resistance. Additionally, automatic transmission rate detection (auto-negotiation) and automatic identification of the transmit and receive lines (Auto MDI-X) allow simple plug-and-play operation, saving time and money during commissioning.

Subject to changes. Please also observe the further product documentation!



Status LEDs, a redundant power supply and an alarm contact (configurable via DIP switch) increase the switch's redundancy and diagnostic capabilities, providing higher operational uptime.

Features:

- Redundant DC power supply
- Large supply voltage range: 9 ... 48 V
- DIP switch to set alarm functions
- Full compliance with IEEE802.3, 802.3u standards
- Non-blocking, store-and-forward switching
- Autonegotiation at all 10/100Base TX ports
- Auto-MDI/MDIX (crossover) at all 10/100BASE-TX ports

Data

Technical data

Switching mode	Store-and-forward; non-blocking
Number of 100 Mbit/s ports	8
Communication standards	IEEE 802.3 10BASE-T IEEE 802.3u 100BASE-TX IEEE 802.3x Flow Control
Redundancy function	Redundant DC power supply
Configuration options	DIP switch for signal contact
Diagnostics	Signal contact
MAC table (size)	2000 addresses
Jumbo frame size	1536. Byte
Supply voltage	9 ... 48 VDC; Cable length:< 3 m
Power consumption (max.)	5.28 W
Power consumption (typ.) (24 V)	4.56 W
ESD (contact/air discharge)	8 KV / 15 KV
Baud rate	Copper cable: 10/100 Mbit/s
Transmission medium (communication/fieldbus)	Copper cable: Cat. 5 or higher, 100 m maximum cable length
Packet throughput	148,800 pkt/s
Controls	12 x DIP switch: Alarm function power supplies and ports 1 ... 8
Indicators	Device: LED (PWR, RPS) green: Power supply (primary), redundant power supply (secondary); LED (ALM) red: Alarm; per port: LED (100, LNK/ACT) green: Status 100 Mbps, LNK/ACT ports 1 ... 8

Subject to changes. Please also observe the further product documentation!



Connection data

Connection technology: communication/fieldbus	Copper cable: 8 x RJ-45
Connection technology: supply	1 x Built-in male connector: 231-436/001-000; included female connector (MCS Connectors): 231-106/026-000

Physical data

Width	50 mm / 1.969 inches
Height	162 mm / 6.378 inches
Depth	120 mm / 4.724 inches

Mechanical Data

Weight	860 g
Color	black
Housing material	Aluminum
Conformity marking	CE

Environmental requirements

Ambient temperature (operation)	-40 ... +70 °C (UL max. +60 °C)
Ambient temperature (storage)	-40 ... +80 °C
Protection type	IP30
Relative humidity (without condensation)	95 %
Mounting type	DIN-35 rail
Vibration resistance	per IEC 60068-2-6
Shock resistance	per IEC 60068-2-27
EMC immunity to interference	per EN 61000-6-2
EMC emission of interference	per EN 61000-6-4

Commercial data

Product Group	27 (special components I/O)
eCl@ss 10.0	19-17-01-30
eCl@ss 9.0	19-17-01-06
ETIM 8.0	EC000734
ETIM 7.0	EC000734
PU (SPU)	1 pcs
Packaging type	box

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
 Hansastr. 27
 32423 Minden
 Phone: +49571 887-0 | Fax: +49571 887-169
 Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
 We are always happy to take your call at +49 (571) 887-44222.




Country of origin	TW
GTIN	4045454665944
Customs tariff number	85176200000

Environmental Product Compliance


RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

Approvals / Certificates

General approvals



Logo	Approval	Additional Approval Text	Certificate name
	EAC Brjansker Zertifizierungsstelle	TP TC 020/2011	EAC RU C-DE.AM02.B.00087/19
	KC National Radio Research Agency	Article 58-2, Clause 3	MSIP-REM-W43-ISW852
	UL Underwriters Laboratories Inc. (ORDINARY LOCATIONS)	UL 508	E175199 Sec.7

Declarations of conformity and manufacturer's declarations

Logo	Approval	Additional Approval Text	Certificate name
	EU-Declaration of Conformity WAGO GmbH & Co. KG	-	-

Optional accessories

Cables and pluggable connectors

Connector plug		
	Item no.: 750-975 ETHERNET RJ-45 connector, IP20; ETHERNET 10/100 Mbit/s; for field assembly	www.wago.com/750-975
	Item no.: 750-976 PROFINET RJ-45 connector, IP20; ETHERNET 10/100 Mbit/s; for field assembly	www.wago.com/750-976

Subject to changes. Please also observe the further product documentation!



Item no.: 750-978/000-012
Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568B; AWG 22; Strain relief

www.wago.com/750-978/000-012



Item no.: 750-979/000-012
Connector ETHERNET; RJ-45; Cat. 6A; angled; Code T568B; AWG 22; Strain relief

www.wago.com/750-979/000-012



Item no.: 750-978/000-021
Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568A; AWG 24; Strain relief

www.wago.com/750-978/000-021



Item no.: 750-979/000-022
Connector ETHERNET; RJ-45; Cat. 6A; angled; Code T568B; AWG 24; Strain relief

www.wago.com/750-979/000-022



Item no.: 750-978/000-022
Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568B; AWG 24; Strain relief

www.wago.com/750-978/000-022



Item no.: 750-979/000-011
Connector ETHERNET; RJ-45; Cat. 6A; angled; Code T568A; AWG 22; Strain relief

www.wago.com/750-979/000-011



Item no.: 750-979/000-013
Connector PROFINET; RJ-45; Cat. 6A; angled; AWG 22; Strain relief

www.wago.com/750-979/000-013



Item no.: 750-979/000-021
Connector ETHERNET; RJ-45; Cat. 6A; angled; Code T568A; AWG 24; Strain relief

www.wago.com/750-979/000-021



Item no.: 750-977/000-011
Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568A; AWG 22

www.wago.com/750-977/000-011



Item no.: 750-978/000-013
Connector PROFINET; RJ-45; Cat. 6A; straight; AWG 22; Strain relief

www.wago.com/750-978/000-013



Item no.: 750-978/000-011
Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568A; AWG 22; Strain relief

www.wago.com/750-978/000-011



Item no.: 750-977/000-022
Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568B; AWG 24

www.wago.com/750-977/000-022



Item no.: 750-977/000-012
Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568B; AWG 22

www.wago.com/750-977/000-012

Subject to changes. Please also observe the further product documentation!



Item no.: 750-977/000-013
Connector PROFINET; RJ-45; Cat. 6A; straight; AWG 22

www.wago.com/750-977/000-013



Item no.: 750-977/000-021
Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568A; AWG 24

www.wago.com/750-977/000-021

Interface module

Interface module



Item no.: 289-195
Interface module; RJ-45; IDC technology; Cat. 6; in mounting carrier; with shield connection

www.wago.com/289-195



Item no.: 289-175
Interface module; RJ-45; PCB terminal blocks, double-row; Cat. 5; in mounting carrier; with shield connection; with shield clamping saddle; 1,50 mm²

www.wago.com/289-175



Item no.: 289-172
Interface module; RJ-45; RJ-45; Cat. 5; in mounting carrier

www.wago.com/289-172



Item no.: 289-196
Interface module; RJ-45; with power jumper contacts; PCB terminal blocks; Cat. 5

www.wago.com/289-196

Power supplies

Power supply unit



Item no.: 787-1722
Switched-mode power supply; Eco; 1-phase; 24 VDC output voltage; 5 A output current; DC-OK LED

www.wago.com/787-1722



Item no.: 787-1712
Switched-mode power supply; Eco; 1-phase; 24 VDC output voltage; 2.5 A output current; DC-OK LED

www.wago.com/787-1712



Item no.: 787-1702
Switched-mode power supply; Eco; 1-phase; 24 VDC output voltage; 1.25 A output current; DC-OK LED

www.wago.com/787-1702



Item no.: 787-1632
Switched-mode power supply; Classic; 1-phase; 24 VDC output voltage; 10 A output current; TopBoost; DC OK contact

www.wago.com/787-1632



Item no.: 787-1102
Switched-mode power supply; Compact; 1-phase; 24 VDC output voltage; 1.3 A output current; DC-OK LED

www.wago.com/787-1102



Item no.: 787-1602
Switched-mode power supply; Classic; 1-phase; 24 VDC output voltage; 1 A output current; NEC Class 2; DC OK signal

www.wago.com/787-1602



Item no.: 787-1622
Switched-mode power supply; Classic; 1-phase; 24 VDC output voltage; 5 A output current; TopBoost; DC OK contact

www.wago.com/787-1622



Item no.: 787-1606
Switched-mode power supply; Classic; 1-phase; 24 VDC output voltage; 2 A output current; NEC Class 2; DC OK signal

www.wago.com/787-1606

Subject to changes. Please also observe the further product documentation!



Downloads

Documentation

Manual

Product Manual 8-Port 100BASE-TX Industrial Switch	V 1.0.3 2020 Jul 14	pdf 1.1 MB	Download
----------------------------------------------------	------------------------	---------------	----------

Bid Text

852-102 X81 - Datei	2019 Feb 19	xml 4.7 kB	Download
------------------------	-------------	---------------	----------

852-102 docx - Datei	2018 May 9	docx 17.1 kB	Download
-------------------------	------------	-----------------	----------

Instruction Leaflet

Gebrauchs- und Montageanleitung 852-101 /852-102 / 852-103 / 852-104		pdf 1.7 MB	Download
----------------------------------------------------------------------	--	---------------	----------

Additional Information

Disposal and Recycling Electrical and electronic equipment, Batteries, Packaging	V 1.1.0 2022 Aug 18	pdf 2.2 MB	Download
-------------------------------------------------------------------------------------	------------------------	---------------	----------

System Description

Industrial Switches – General Product Information		pdf 1.9 MB	Download
---------------------------------------------------	--	---------------	----------

CAD/CAE-Data

CAD data

2D/3D Models 852-102		URL	Download
----------------------	--	-----	----------

CAE data

EPLAN Data Portal 852-102		URL	Download
---------------------------	--	-----	----------

WSCAD Universe 852-102		URL	Download
------------------------	--	-----	----------

ZUKEN Portal 852-102		URL	Download
----------------------	--	-----	----------

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Environmental Product Compliance

Compliance Search

Environmental Product Compliance 852-102

URL

Download

Industrial-Switch; 8-port 100Base-TX; black

Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.