


I I I I I I I I I I I I I I I I I I I	D G	н п	m	D	0

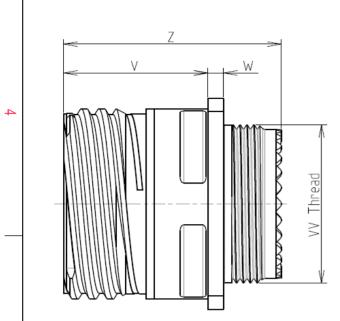

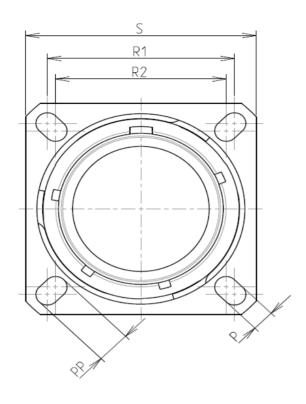



LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 17

PLATING : S = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

-Standard : Based on MIL-DTL-38999 Series III

	-Shell Material	: Stainless Steel			
2	-Shell Plating	: Nickel			
	-Insulator	: Thermoplastic			
	-Contacts	: Copper Alloy			
	-Seals & Grommet	: Silicon Elastomer			
	-Contact Plating	: Gold over copper Alloy 0.8µm minimum			
	-Durability	: 500 Mating cycles			
	-Delivered with Souriau contacts and Accessories				
	-Temperature Range	65°C to +200°C			
	-Salt Spray	: 500 hours			
	-Mass	: 69.58 g ± 10%			

8D 0

G

17

-

S

75

Ρ

F

D


Dim	Nominal
Р	3.25±0.2
PP	4.93±0.2
R1	26.97
R2	24.61
S	33.3±0.3
V	20.83+0/-1.25
W	2.1/2.5
Z	31.5 Max
VV THREAD	M25x1-6g


ORIENTATION : D

CONTACT TYPE : PIN(500 Matings)

Е

CONTACT LAYOUT : 17-75



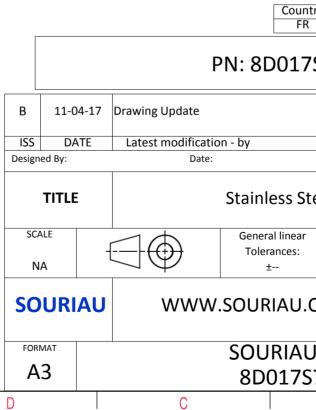

	Φ		A			
					4	
S EXA	AMPLE				3	
s which er of t indation untry FR	non-conformit ch does not co che Parties or to on, technical no Jurisd	mply with by a third par	ty		2	
		CUSTOME	R DRAWING	MOD N°		
Stee	Steel Receptacle 8D series					
ar			/ PROJECT 5 9		1	
J.CC	.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission					
	DRG N° 5PD-C			SHEET		
57	B		A		J	

	工	۵	н г	m		0	
		Contact Layout					Panel Cuto
4		75 () ()			π	SQUARE FLANGE RECEPTACLE (TYPE 0)	
	Ctc A B	2#8 Triax 17-75 X Y 0 4.75 0 -4.75			¥	Max. thickness panel for receptacle: T	
പ						Dim ØA ØA	A A
						R1 ØT	
	-						
	-					SOURIAU shall not be l due to a use of the the Specifications issued (professional re	Products w d by either
⊳0						 PN· {	Coun FR 8D017
						7 Drawing Update	
					ISS DATE Designed By:	Latest modification - by Date:	
					TITLE		inless St
<u> </u>					SCALE NA		neral linear olerances: ±
					SOURIA	U WWW.SOL	JRIAU.
				_	FORMAT A3	SO 8	URIAU D0175
l	Н	G	F	E	D	С	

