






REV.	ECN NO.	DESCRIPTION	SIGN	DATE
C1	N/A	INITIAL DRAWING	Liu	2020/05/16



RECOMMENDED PANEL Cut-Out



Panel T: Max 2.2

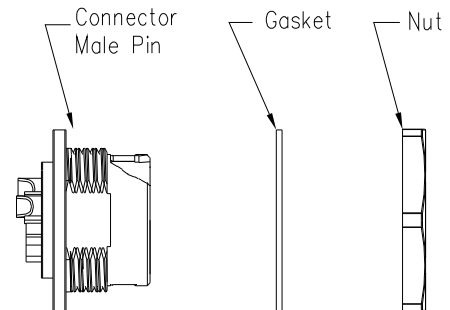

- Specification:
- 1.Operation Temperature: -45°C~105°C.
 - 2.Insulation Resistance: 100MΩ at DC500V.
 - 3.Contact Resistance: <10mΩ.
 - 4.Withstand Voltage: 2000V AC
 - 5.Operating Current: 20A+5A
 - 6.Operating Voltage: AC 300V
 - 7.Waterproof Rate: IP67 (Mated)
 - 8.Housing: Nylon, Black
 - 9.Male Pin: Copper Alloy, Gold Plated
 - 10.Female Pin: Copper Alloy, Gold Plated
 - 11.Gasket: Silicon Gray
 - 12.Panel Nut: Nylon, Orange
 - 13.Torque Rate: 0.8~1.0N·m
 - 14.RoHS Compliant.
 - 15.Mating Cap P/N: 806-00058-00

22XXX535-01

Pin Number



3+9 Pin

P/N: 24309535-01



3+11 Pin

P/N: 24311535-01

Pin Assignments Front View

UNIT: mm		DESCRIPTION	Large Series Push Lock Female socket With Male Pin
TOLERANCE	.X ±0.25 .XX ±0.15 .XXX ±0.05 ANGLES ±1°	SCALE	1:1
		SHEET	1 OF 1
REV.	C1	SIZE	A4
			* : Inspection Item

CHOGORI

PART NO	24XXX535-01	DRAWN BY	Liu	DATE	2020/05/16
DWG NO		CHECKED BY	Mo	DATE	2020/05/16
CUSTOMER		APPROVED BY	Adley	DATE	2020/05/16

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN CHOGORI PERSONNEL WITHOUT AUTHORIZATION FROM CHOGORI CORP.