


## Specification Sheet

Part Number: 553-50027

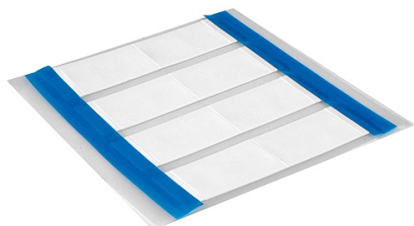

ShrinkTrak Labels, 1-Sided, 1-Slit, .38" (9.52mm), PO-X, Yellow, 500/box

|                                |   |
|--------------------------------|---|
| <b>Article Number</b>          | 553-50027   |
| <b>Type</b>                    | HST9-3YE-S  |
| <b>Color</b>                   | Yellow (YE)   |
| <b>Features &amp; Benefits</b> | <ul style="list-style-type: none"><li>• Slide Slit and optional center slits for easy wire insertion.</li><li>• Smooth surface for clean and legible printing.</li><li>• Supplied on a ladder style carrier so that markers can be kitted after printing.</li><li>• A 3:1 shrink ratio means fewer skews as each marker covers a wider range of wire diameters.</li></ul> |
| <b>Quantity Per</b>            | box   |

### Product Description

HellermannTyton's ShrinkTrak heat shrinkable markers make it easy to mark wire, cable and other components. The military approved heat shrink tubing is flattened and assembled in a ladder style carrier system for easy printing using a thermal transfer printer. The ladder system creates a kit of markers that can be sorted, removed and applied in any order thus saving time, labor and speeding production.

|                                       |  |
|---------------------------------------|--|
| <b>Short Description</b>              | ShrinkTrak Labels, 1-Sided, 1-Slit, .38" (9.52mm), PO-X, Yellow, 500/box |
| <b>Global Part Name</b>               | HST9-3YE-S-PO-X-YE   |
| <b>Variant</b>                        | Thin-Wall  |
| <b>Width W (Imperial)</b>             | 0.95   |
| <b>Width W (Metric)</b>               | 24.13  |
| <b>Thickness T (Imperial)</b>         | .003   |
| <b>Thickness T (Metric)</b>           | .0762  |
| <b>Height H (Imperial)</b>            | 0.597  |
| <b>Height H (Metric)</b>              | 15.16  |
| <b>Width of Liner (Metric)</b>        | 76.2   |
| <b>Width of Liner (imperial)</b>      | 3.0  |
| <b>Outside Diameter OD(Imperial)</b>  | 0.375  |
| <b>Outside Diameter OD(metric)</b>    | 9.52   |
| <b>Outside Diameter Max(Imperial)</b> | 0.375  |
| <b>Outside Diameter Max (metric)</b>  | 9.52   |
| <b>Wall Thickness WT (Imperial)</b>   | 0.031  |
| <b>Wall Thickness WT (Metric)</b>     | 0.79   |

|                 |                                 |
|-----------------|---------------------------------|
| <b>Material</b> | Polyolefin, cross-linked (PO-X) |
|-----------------|---------------------------------|

**Material Shortcut** PO-X

|                    |                          |
|--------------------|--------------------------|
| <b>US MIL SPEC</b> | MIL-STD-202G Method 215K |
|--------------------|--------------------------|

SAE-AS81531

SAE-AMS-DTL-23053/5 Class 1 and 3

**Flammability**

UL 224 VW-1

**Halogen free**

No

**Operating Temperature (Metric)**

-67°F to +275°F (-55°C to +135°C)

**Reach Complaint(Article 33)**

Yes

**ROHS Complaint**

Yes

**Certification/Specification WEB**

UL 224 125 °C 600V VW-1 SAE - AS81531 SAE - AMS - DTL-23053/5 Class 1 and 3

|                                   |     |
|-----------------------------------|-----|
| <b>Package Quantity(Imperial)</b> | 500 |
|-----------------------------------|-----|

**Package Quantity (Metric)** 500

|                       |            |
|-----------------------|------------|
| <b>Customs Number</b> | 3917320000 |
|-----------------------|------------|

**Content Unit(BMEcat)** pack

|                          |      |
|--------------------------|------|
| <b>Labels per Column</b> | 1    |
| <b>Labels per Row</b>    | 2    |
| <b>Weight (Metric)</b>   | 0.43 |
| <b>Weight (Imperial)</b> | 0.93 |