


Data sheet | Item number: 706-100/637-300

Connection cable; 37-pole; with solder pin; Female connector; open-ended;
Length: 3 m; Conductor cross-section: 0.25 mm²



www.wago.com/706-100/637-300

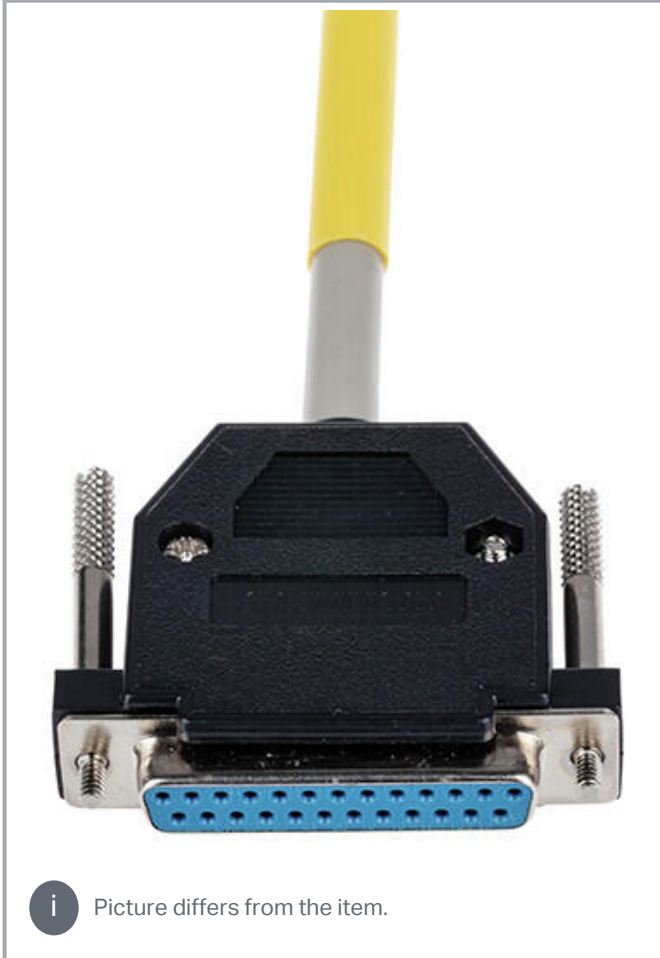

| Color coding acc. to DIN VDE 47100 | | 37 poles female Sub-D connector |
|------------------------------------|--|---------------------------------|
| | | Pin number |
| White | | 1 |
| Brown | | 2 |
| Green | | 3 |
| Yellow | | 4 |
| Grey | | 5 |
| Pink | | 6 |
| Blue | | 7 |
| Red | | 8 |
| Black | | 9 |
| Violet | | 10 |
| Grey-Pink | | 11 |
| Red-Blue | | 12 |
| White-Green | | 13 |
| Brown-Green | | 14 |
| White-Yellow | | 15 |
| Yellow-Brown | | 16 |
| White-Grey | | 17 |
| Grey-Brown | | 18 |
| White-Pink | | 19 |
| Pink-Brown | | 20 |
| White-Blue | | 21 |
| Brown-Blue | | 22 |
| White-Red | | 23 |
| Brown-Red | | 24 |
| White-Black | | 25 |
| Brown-Black | | 26 |
| Grey-Green | | 27 |
| Yellow-Grey | | 28 |
| Pink-Green | | 29 |
| Yellow-Pink | | 30 |
| Green-Blue | | 31 |
| Yellow-Blue | | 32 |
| Green-Red | | 33 |
| Yellow-Red | | 34 |
| Green-Black | | 35 |
| Yellow-Black | | 36 |
| Grey-Blue | | 37 |
| Shield | | Connected to Sub-D |

Data
Notes

Note When using more than 10 wires, the maximum current per wire must be reduced to 1 A.

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Electrical data

| | |
|-------------------------|--------------|
| Operating voltage | ≤ AC/DC 35 V |
| Current per wire (max.) | 2 A |

Connection data

| | |
|------------|-------------------|
| Cable type | LiYCY |
| Color code | per DIN VDE 47100 |

Connection 1

| | |
|--------------------|---------------------------------|
| Connector | D-subminiature female connector |
| Pole number 1 | 37 |
| Connection type 1 | System |
| Wire cross-section | 0.25 mm ² |
| Connection type | D-subminiature |

Connection 2

| | |
|-------------------|------------|
| Connector 2 | open-ended |
| Connection type 2 | open-ended |

Physical data

| | |
|--------------|-----|
| Cable length | 3 m |
|--------------|-----|

Material Data

| | |
|--------|-------|
| Weight | 818 g |
|--------|-------|

Environmental requirements

| | |
|---------------------------------|----------------|
| Ambient temperature (operation) | -20 ... +50 °C |
|---------------------------------|----------------|

Commercial data

| | |
|-------------------|---------------|
| ETIM 8.0 | EC001855 |
| ETIM 7.0 | EC001855 |
| PU (SPU) | 1 pcs |
| Country of origin | FR |
| GTIN | 4050821835707 |

Subject to changes. Please also observe the further product documentation!



Customs tariff number

85444290900

Environmental Product Compliance

RoHS Compliance Status

Compliant, No Exemption

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 706-100/637-300

URL

Download

Connection cable; 37-pole; with solder pin; Female connector; open-ended; Length: 3 m; Conductor cross-section: 0.25 mm²

Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.