

Data sheet | Item number: 787-1014/072-000



DC/DC Converter; Compact; 72 VDC input voltage; 24 VDC output voltage; 2 A output current



www.wago.com/787-1014/072-000



 Picture differs from the item.

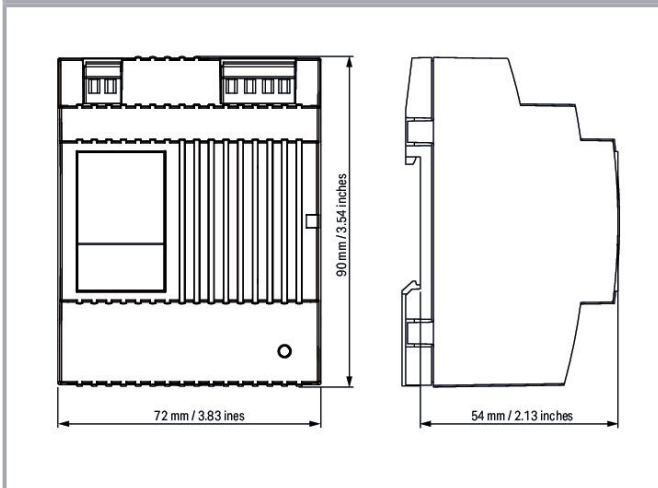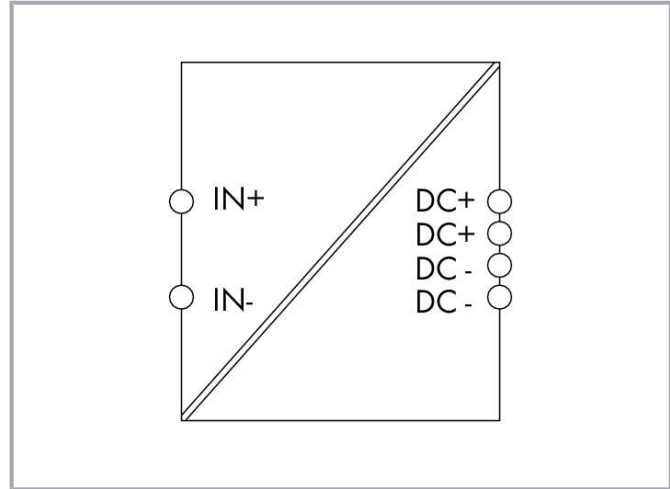

Item description

Features:

- Switched-mode power supply

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



- Natural convection cooling when horizontally mounted
- Stepped profile, ideal for distribution boards/boxes
- Suitable for both parallel and series operation
- Electrically isolated output voltage (SELV) per EN 60950-1/UL 60950-1
- Control deviation: $\pm 1\%$ ($\pm 10\%$ within the application range of EN 50121-3-2)
- Suitable for railway applications

Data

Technical data

Input

Nominal input voltage $U_{i\text{nom}}$	DC 72 V
Input voltage range	DC 40 ... 90 V
Nominal mains frequency range	0 Hz
Input current I_i	≤ 0.79 A (72 VDC)
Inrush current	≤ 30 A (NTC)
Mains failure hold-up time	≥ 8 ms (72 VDC)

Output

Nominal output voltage $U_{o\text{nom}}$	DC 24 V (SELV)
Nominal output current $I_{o\text{nom}}$	2 A (24 VDC); 1.6 A (in any mounting position)
Nominal output power	48 W
Residual ripple	≤ 100 mV (peak-to-peak)
Current limitation	$1.1 \times I_{o\text{nom}}$ (typ.)
Overload behavior	Constant current

Signaling and Communication

Signaling	1 x Status indication LED (green)
Operation status indicator	Green LED (U_o)

Efficiency/power losses

Power loss P_i	≤ 2 W (72 VDC; no load); ≤ 9 W (72 VDC; nominal load)
Power loss (max.) $P_{I(\text{max})}$	10.5 W (40 VDC / 24 VDC; 2 A)
Efficiency (typ.)	84 %

Subject to changes. Please also observe the further product documentation!



Circuit protection

Internal fuse	T 4 A / 125 VDC
Backup fusing (recommended)	Circuit breaker: 6 A, 10 A; Tripping characteristic: B or C

Safety and protection

Protection class	II
Protection type	IP20; per EN 60529
Overvoltage category	II
Pollution degree	2
Transient suppression (primary)	Varistor
Overvoltage protection; secondary	Internal protective circuit ≤ 40 VDC (in the event of a fault)
Short-circuit-protected	Yes
Open-circuit-proof	Yes
Parallel operation	No
Series operation	Yes
MTBF	> 500,000 h (per IEC 61709)

Connection data

Connection type 1	Input/Output
Connection technology	CAGE CLAMP®
WAGO connector	WAGO 740 Series
Solid conductor	0.08 ... 2.5 mm ² / 28 ... 12 AWG
Fine-stranded conductor	0.08 ... 2.5 mm ² / 28 ... 12 AWG
Strip length	6 ... 7 mm / 0.24 ... 0.28 inches

Physical data

Width	72 mm / 2.835 inches
Height	89 mm / 3.504 inches
Depth	59 mm / 2.323 inches
Depth from upper-edge of DIN-rail	55 mm / 2.165 inches

Mechanical Data

Mounting type	DIN-35 rail
---------------	-------------

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
 Hansastr. 27
 32423 Minden
 Phone: +49571 887-0 | Fax: +49571 887-169
 Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
 We are always happy to take your call at +49 (571) 887-44222.



Material Data

Flammability class per UL94	V0
Fire load	0.12 MJ
Weight	250 g

Environmental requirements

Ambient temperature (operation)	-40 ... +70 °C
Ambient temperature (storage)	-40 ... +85 °C
Relative humidity	5 ... 96 % (coated PCB)
Derating	-1.5 %/K (> 55 °C)
Resistance to shock and vibration	Category 1, Class B (per EN 61373:2010)

Standards and specifications

Conformity marking	CE
Standards/specifications	EN 61010-1 EN 61010-2-201 EN 61204-3 EN 50121-3-2 DNV
Standards/specifications (pending)	EN 50125 UL 60950 UL 508

Commercial data

eCl@ss 10.0	27-04-07-01
eCl@ss 9.0	27-04-07-01
ETIM 8.0	EC002540
ETIM 7.0	EC002540
PU (SPU)	1 pcs
Packaging type	box
Country of origin	DE
GTIN	4055143256544
Customs tariff number	85044083900


Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------


Subject to changes. Please also observe the further product documentation!

Approvals / Certificates

General approvals


Logo	Approval	Additional Approval Text	Certificate name
	EAC Brjansker Zertifizierungsstelle	TP TC 004/2011, TP TC 020/2011	EAC RU C-DE.AM02.B.00089_19

Declarations of conformity and manufacturer's declarations



Logo	Approval	Additional Approval Text	Certificate name
	EU-Declaration of Conformity WAGO GmbH & Co. KG	-	-

Optional accessories

Tool

Operating tool			
	Item no.: 210-720 Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured		www.wago.com/210-720

Marking accessories

Marking strip			
	Item no.: 210-831 Marking strips; on reel; 2.3 mm wide; plain; Self-adhesive; white		www.wago.com/210-831
	Item no.: 210-832 Marking strips; on reel; 3 mm wide; plain; Self-adhesive; white		www.wago.com/210-832

Downloads

Documentation

Bid Text

787-1014/072-000 pdf - Datei	2019 Jun 24	pdf 76.2 kB	Download
787-1014/072-000	2019 Jun 24	docx	Download

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



docx - Datei			19.2 kB	
--------------	--	--	---------	--

787-1014/072-000	2019 Feb 19	xml	Download
------------------	-------------	-----	----------

X81 - Datei		6.7 kB	
-------------	--	--------	--

Instruction Leaflet

Primär getaktete Stromversorgungen COMPACT DC 72 V / DC 24 V, 2 A		pdf 221.8 kB	Download
--	--	-----------------	----------

Additional Information

Disposal and Recycling Electrical and electronic equipment, Batteries, Packaging	V 1.1.0 2022 Aug 18	pdf 2.2 MB	Download
---	------------------------	---------------	----------

CAD/CAE-Data**CAD data**

2D/3D Models 787-1014/072-000	URL	Download
-------------------------------	-----	----------

CAE data

EPLAN Data Portal 787-1014/072-000	URL	Download
------------------------------------	-----	----------

WSCAD Universe 787-1014/072-000	URL	Download
---------------------------------	-----	----------

ZUKEN Portal 787-1014/072-000	URL	Download
-------------------------------	-----	----------

WSCAD Universe 787-1014/072-000	URL	Download
---------------------------------	-----	----------

EPLAN Data Portal 787-1014/072-000	URL	Download
------------------------------------	-----	----------

Environmental Product Compliance**Compliance Search**

Environmental Product Compliance 787-1014/072-000	URL	Download
---	-----	----------

DC/DC Converter; Compact; 72 VDC input voltage; 24 VDC output voltage; 2 A output current

Subject to changes. Please also observe the further product documentation!



Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.