

<b>T</b>	G	н т – – – – – – – – – – – – – – – – – –	m –	0



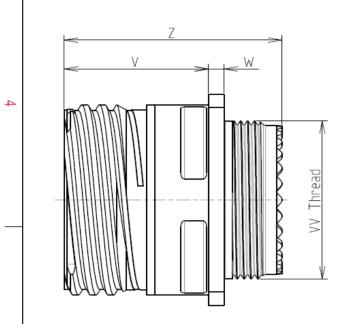



LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 21

PLATING : F = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

 $\sim$ 

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium			
-Shell Plating	: Nickel			
-Insulator	: Thermoplastic			
-Contacts	: Copper Alloy			
-Seals & Grommet	: Silicon Elastomer			
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum			
-Durability	: 500 Mating cycles			
-Delivered with Souriau contacts and Accessories				
-Temperature Range	-65°C to +200°C			
-Salt Spray	: 48 hours			

8D 0

G

21

-

F

42

Ρ

F

С


Dim	Nominal
Р	3.25±0.2
PP	4.93±0.2
R1	31.75
R2	29.36
S	39.7±0.3
V	20.07+0/-1.25
W	2.1/3.2
Z	31.5 Max
VV THREAD	M31x1-6g


ORIENTATION : C

CONTACT TYPE : PIN(500 Matings)

Е

CONTACT LAYOUT : 21-42



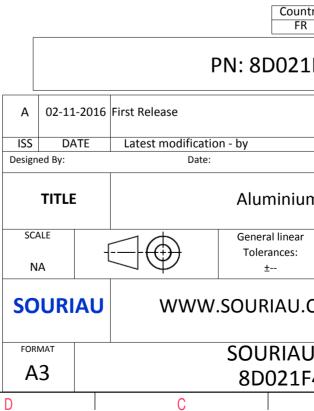

	Φ		A		
					4
	AMPLE				3
s whic er of t	non-conformit ch does not co he Parties or t on, technical n Jurisd	mply with by a third par			
FR 154	42PC	Not Listed			2
				MOD N°	
		CUSTOME	R DRAWING		
um	um Receptacle 8D series				
ar :	NPRDS / PROJECT 859				
	.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission				
	DRG N° 2PC-C			SHEET 1/2	
	B		A		1

_	т	۵	н <b>т</b>	т	D		0	
		Contact Layout					Ра	nel Cutou
4		42 •				SQUAR	RE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING	
	Ctc A B	2#4 Power 21-42 X Y 0 6.19 0 -6.19					ØA	<u>T_</u>
cى							Dim ØA ØAA R1 ØT	
	<b>–</b>							
							SOURIAU shall not be liab due to a use of the Pro the Specifications issued by (professional record	oducts wh / either of
N								Country FR
							PN: 8[	D021F
					A	02-11-2016 F DATE	irst Release Latest modification - by	
					Designed		Date:	
					т	TITLE	Alur	ninium
<b>_</b>					SCAL			al linear ances: ±
					SOL	JRIAU	WWW.SOUR	IAU.C
					FORMA A3			RIAU 021F4
L	Н	G	F	E	D		C	

