

## 96 Watt - LP96W Series

CONSTANT VOLTAGE OR CONSTANT CURRENT LED DRIVER WITH DIMMING



DIMMING  
LP96W Series  
**96W**

### Model: LP96W Series

- Drive Mode: Constant Current or Constant Voltage
- Technology: PFC Corrected 2-Stage Switch Mode
- Output Power: 96W Max.
- Input Voltage: 90 to 305VAC, 47- 63Hz
- Number of Outputs: One
- Output Voltages: 6VDC - 274VDC
- Output Currents: 350mA - 5350mA
- Optional 0-10V or PWM Positive Dimming 10% ~ 100%

### Environmental

1. Operating temperature: Tc 90C Maximum. Reference -30 to +65°C ambient
2. For UL Type TL (Tref Max/Meas. Tref): UL Class 2 83/54°C, UL Non Class 2 90/75°C
3. Storage temperature range: -40 to +85°C
4. Humidity (non-condensing): 5% - 95%RH
5. Cooling: Convection
6. Vibration Frequency: 5-55Hz/2g, 30 minutes
7. Impact resistance: 1g/s
8. MTBF@ 40°C: 474,000 hours @ Full Load per MIL-217F Notice 2.

### Safety and Compliance


1. Class P: UL8750, EN61347, CSA 22.2 safety listed, UL Class P or- Type TL: UL8750, EN61347, CSA 22.2, UL TL recognized
2. FCC, 47CFR Part 15 Class B certified
3. Water resistant and Dust Proof Design: IP66, NEMA6, for Dry, Damp, Wet Locations.
4. Compact Miniature, Lightweight Design.
5. Safety Isolation between Primary and Secondary
6. Meets EN61000-3-2 & EN61000-3-3 Class C
7. Protection: output over-voltage, output over-current, output short circuit, auto-recovery.
8. EN61000-4-5: 2kV/4kV 8/20 μsec surge protection.

### Electrical Specifications at 25°C


- Input voltage range: 90 to 305VAC
- Frequency: 47- 63Hz
- Power Factor: ≥ 0.90 at ≥ 60% Load, 120Vac/230Vac/277Vac 50/60Hz
- THD%: ≤ 20% at ≥ 60% Load, 120Vac/230Vac/277Vac 50/60Hz
- Inrush current: <50A at 25C, 277V, cold start, Max. Load
- Input current: 1.3A Maximum
- Efficiency: 88% typical at 230Vac Full Load
- Line regulation accuracy: ± 3%
- Load regulation accuracy: ± 4%
- Leakage current: 277Vac, 700uA typical; Hold up time: half cycle

### Mechanical Dimensions: Inches [mm]

Material: Black Aluminum Housing  
Fully Encapsulated  
Weight: 21.6 oz (612 grams) Typical

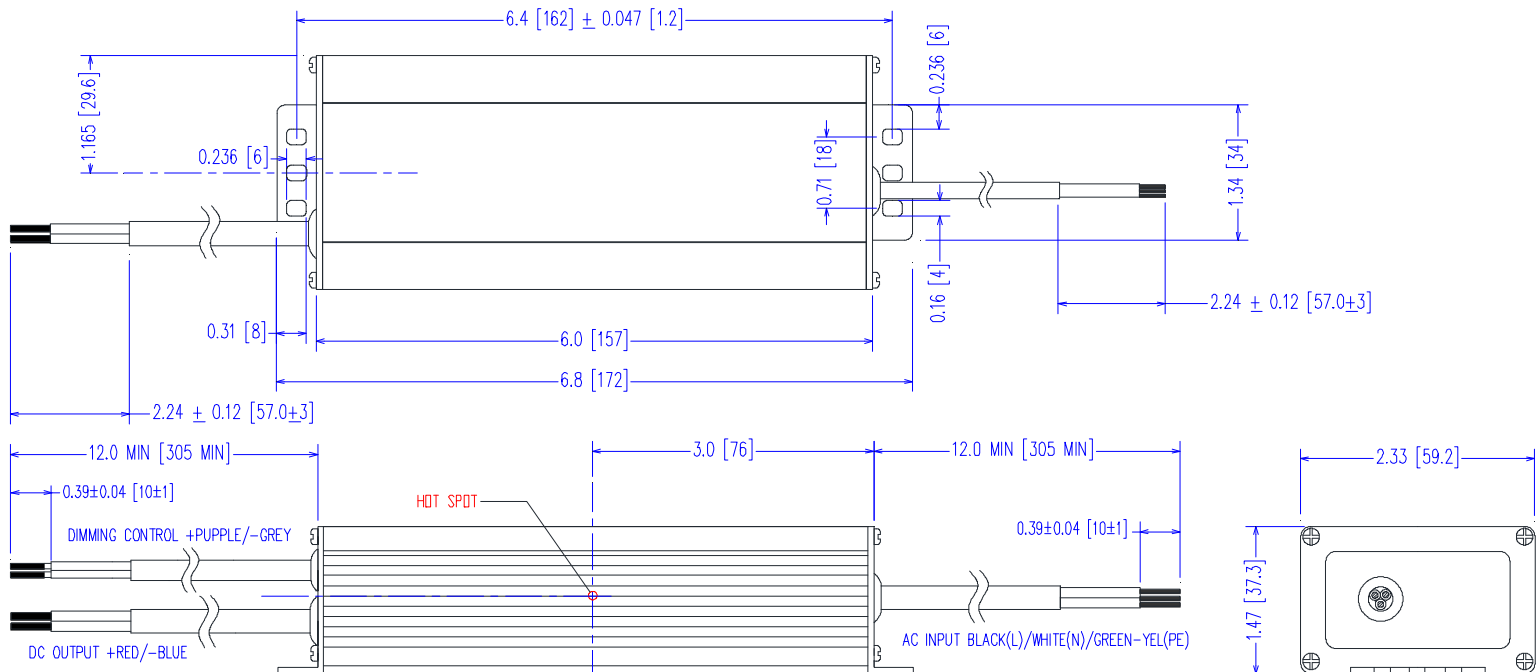

### Labeling Example

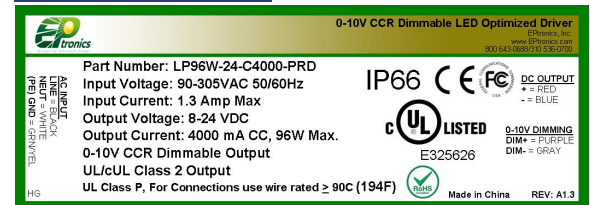

96W

LP96W Series

DIMMING



LED Optimized Drivers



IP66



96 Watt - LP96W Series

CONSTANT VOLTAGE OR CONSTANT CURRENT LED DRIVER WITH DIMMING

## UL Class P Constant Current Versions

Part Number <sup>(2)</sup>	US Class 2	CN Class 2	UL Types	Output Voltage Range	Output Constant Current	Current Accuracy	Output Power Maximum	Typical Efficiency <sup>(1)</sup>
LP96W-274-C0350-P	NO	NO	HL	92 - 274 VDC	350 mA	± 3%	96W	92%
LP96W-213-C0450-P	NO	NO	HL	71 - 213 VDC	450 mA	± 3%	96W	92%
LP96W-137-C0700-P	NO	NO	HL	46 - 137 VDC	700 mA	± 3%	96W	92%
LP96W-92-C1050-P	NO	NO	HL	31 - 92 VDC	1050 mA	± 3%	96W	91%
LP96W-69-C1400-P	NO	NO	HL	23 - 69 VDC	1400 mA	± 3%	96W	91%
LP96W-54-C1750-P	YES	NO	HL	18 - 54 VDC	1750 mA	± 3%	96W	91%
LP96W-48-C2000-P	YES	NO	HL	16 - 48 VDC	2000 mA	± 3%	96W	90%
LP96W-46-C2100-P	YES	NO	HL	16 - 46 VDC	2100 mA	± 3%	96W	90%
LP96W-39-C2450-P	YES	YES	HL	14 - 39 VDC	2450 mA	± 3%	96W	89%
LP96W-36-C2660-P	YES	YES	HL	12 - 36 VDC	2660 mA	± 3%	96W	89%
LP96W-34-C2800-P	YES	YES	HL	12 - 34 VDC	2800 mA	± 3%	96W	89%
LP96W-30-C3150-P	YES	YES	HL	10 - 30 VDC	3150 mA	± 3%	96W	89%
LP96W-27-C3500-P	YES	YES	HL	9 - 27 VDC	3500 mA	± 3%	96W	88%
LP96W-25-C3840-P	YES	YES	HL	9 - 25 VDC	3840 mA	± 3%	96W	88%
LP96W-24-C4000-P <sup>(5)</sup>	YES	YES	HL	8 - 24 VDC	4000 mA	± 3%	96W	88%
LP96W-20-C4800-P	YES	YES	HL	7 - 20 VDC	4800 mA	± 3%	96W	87%
LP96W-18-C5350-P	NO	NO	HL	6 - 18 VDC	5350 mA	± 3%	96W	86%

## UL Class P Constant Voltage Versions

Part Number	US Class 2	CN Class 2	UL Types	Output Constant Voltage	Output Current Range	Voltage Accuracy	Output Power Maximum	Typical Efficiency <sup>(1)</sup>
LP96W-274-P	NO	NO	HL	274 VDC	88 - 350 mA	± 5%	96W	92%
LP96W-213-P	NO	NO	HL	213 VDC	113 - 450 mA	± 5%	96W	92%
LP96W-137-P	NO	NO	HL	137 VDC	175 - 700 mA	± 5%	96W	92%
LP96W-92-P	NO	NO	HL	92 VDC	263 - 1050 mA	± 5%	96W	91%
LP96W-69-P	NO	NO	HL	69 VDC	350 - 1400 mA	± 5%	96W	91%
LP96W-54-P	YES	NO	HL	54 VDC	438 - 1750 mA	± 5%	96W	91%
LP96W-48-P	YES	NO	HL	48 VDC	500 - 2000 mA	± 5%	96W	90%
LP96W-46-P	YES	NO	HL	46 VDC	525 - 2100 mA	± 3%	96W	90%
LP96W-39-P	YES	YES	HL	39 VDC	613 - 2450 mA	± 5%	96W	89%
LP96W-36-P	YES	YES	HL	36 VDC	665 - 2660 mA	± 5%	96W	89%
LP96W-34-P	YES	YES	HL	34 VDC	700 - 2800 mA	± 5%	96W	89%
LP96W-30-P	YES	YES	HL	30 VDC	788 - 3150 mA	± 5%	96W	89%
LP96W-27-P	YES	YES	HL	27 VDC	875 - 3500 mA	± 5%	96W	88%
LP96W-25-P	YES	YES	HL	25 VDC	960 - 3840 mA	± 5%	96W	88%
LP96W-24-P <sup>(5)</sup>	YES	YES	HL	24 VDC	1000 - 4000 mA	± 5%	96W	88%
LP96W-20-P	YES	YES	HL	20 VDC	1200 - 4800 mA	± 5%	96W	87%
LP96W-18-P	NO	NO	HL	18 VDC	1338 - 5350 mA	± 5%	96W	86%

## Notes

- Typical efficiency measured at 230VAC input, full load
- For dimmable versions add appropriate designator to the end of the part number: For Example: LP96W-24-C4000-PRD is 0-10V or resistance dimmable version, LP96W-24-C4000-PPD is PWM dimmable version.  
-PRD 0-10V & Resistance dimmable version comes with an extra two wires +Purple/-Grey on the output side.  
-PPD PWM Dimmable version comes with an extra two wires +Purple/-Grey on the output side.
- PRD 0-10V Dimming is compatible with most quality 0-10V wall dimmers and direct 0-10V analog signal. See page 4 for details.
- PPD PWM version is PWM Dimmable via a positive 10% to 100% Duty Cycle, 500Hz to 1.5kHz, 0-10V Pulse. See page 5 for details.
- SAM Recognized under E325626.

Specifications subject to change without notice

Custom designs available. Please consult with the factory.

## 96 Watt - LP96W Series

CONSTANT VOLTAGE OR CONSTANT CURRENT LED DRIVER WITH DIMMING

### Constant Current Versions

Part Number <sup>(2)</sup>	US Class 2	CN Class 2	UL Types	Output Voltage Range	Output Constant Current	Current Accuracy	Output Power Maximum	Typical Efficiency <sup>(1)</sup>
LP96W-274-C0350	NO	NO	TL & HL	92 - 274 VDC	350 mA	± 3%	96W	92%
LP96W-213-C0450	NO	NO	TL & HL	71 - 213 VDC	450 mA	± 3%	96W	92%
LP96W-137-C0700	NO	NO	TL & HL	46 - 137 VDC	700 mA	± 3%	96W	92%
LP96W-92-C1050	NO	NO	TL & HL	31 - 92 VDC	1050 mA	± 3%	96W	91%
LP96W-69-C1400	NO	NO	TL & HL	23 - 69 VDC	1400 mA	± 3%	96W	91%
LP96W-54-C1750	YES	NO	TL & HL	18 - 54 VDC	1750 mA	± 3%	96W	91%
LP96W-48-C2000	YES	NO	TL & HL	16 - 48 VDC	2000 mA	± 3%	96W	90%
LP96W-46-C2100	YES	NO	TL & HL	16 - 46 VDC	2100 mA	± 3%	96W	90%
LP96W-39-C2450	YES	YES	TL & HL	14 - 39 VDC	2450 mA	± 3%	96W	89%
LP96W-36-C2660	YES	YES	TL & HL	12 - 36 VDC	2660 mA	± 3%	96W	89%
LP96W-34-C2800	YES	YES	TL & HL	12 - 34 VDC	2800 mA	± 3%	96W	89%
LP96W-30-C3150	YES	YES	TL & HL	10 - 30 VDC	3150 mA	± 3%	96W	89%
LP96W-27-C3500	YES	YES	TL & HL	9 - 27 VDC	3500 mA	± 3%	96W	88%
LP96W-25-C3840	YES	YES	TL & HL	9 - 25 VDC	3840 mA	± 3%	96W	88%
LP96W-24-C4000 <sup>(5)</sup>	YES	YES	TL & HL	8 - 24 VDC	4000 mA	± 3%	96W	88%
LP96W-20-C4800	YES	YES	TL & HL	7 - 20 VDC	4800 mA	± 3%	96W	87%
LP96W-18-C5350	NO	NO	TL & HL	6 - 18 VDC	5350 mA	± 3%	96W	86%

### Constant Voltage Versions

Part Number	US Class 2	CN Class 2	UL Types	Output Constant Voltage	Output Current Range	Voltage Accuracy	Output Power Maximum	Typical Efficiency <sup>(1)</sup>
LP96W-274	NO	NO	TL & HL	274 VDC	88 - 350 mA	± 5%	96W	92%
LP96W-213	NO	NO	TL & HL	213 VDC	113 - 450 mA	± 5%	96W	92%
LP96W-137	NO	NO	TL & HL	137 VDC	175 - 700 mA	± 5%	96W	92%
LP96W-92	NO	NO	TL & HL	92 VDC	263 - 1050 mA	± 5%	96W	91%
LP96W-69	NO	NO	TL & HL	69 VDC	350 - 1400 mA	± 5%	96W	91%
LP96W-54	YES	NO	TL & HL	54 VDC	438 - 1750 mA	± 5%	96W	91%
LP96W-48	YES	NO	TL & HL	48 VDC	500 - 2000 mA	± 5%	96W	90%
LP96W-46	YES	NO	TL & HL	46 VDC	525 - 2100 mA	± 3%	96W	90%
LP96W-39	YES	YES	TL & HL	39 VDC	613 - 2450 mA	± 5%	96W	89%
LP96W-36	YES	YES	TL & HL	36 VDC	665 - 2660 mA	± 5%	96W	89%
LP96W-34	YES	YES	TL & HL	34 VDC	700 - 2800 mA	± 5%	96W	89%
LP96W-30	YES	YES	TL & HL	30 VDC	788 - 3150 mA	± 5%	96W	89%
LP96W-27	YES	YES	TL & HL	27 VDC	875 - 3500 mA	± 5%	96W	88%
LP96W-25	YES	YES	TL & HL	25 VDC	960 - 3840 mA	± 5%	96W	88%
LP96W-24 <sup>(5)</sup>	YES	YES	TL & HL	24 VDC	1000 - 4000 mA	± 5%	96W	88%
LP96W-20	YES	YES	TL & HL	20 VDC	1200 - 4800 mA	± 5%	96W	87%
LP96W-18	NO	NO	TL & HL	18 VDC	1338 - 5350 mA	± 5%	96W	86%

### Notes

1. Typical efficiency measured at 230VAC input, full load
2. For dimmable versions add appropriate designator to the end of the part number: For Example: LP96W-24-C4000-RD is 0-10V or resistance dimmable version, LP96W-24-C4000-PD is PWM dimmable version.  
-RD 0-10V & Resistance dimmable version comes with an extra two wires +Purple/-Grey on the output side.  
-PD PWM Dimmable version comes with an extra two wires +Purple/-Grey on the output side.
3. -RD 0-10V Dimming is compatible with most quality 0-10V wall dimmers and direct 0-10V analog signal. See page 4 for details.
4. -PD PWM version is PWM Dimmable via a positive 10% to 100% Duty Cycle, 500Hz to 1.5kHz, 0-10V Pulse. See page 5 for details.
5. SAM Recognized under E325626.

Custom designs available. Please consult with the factory.

Specifications subject to change without notice

## 96 Watt - LP96W Series

CONSTANT VOLTAGE OR CONSTANT CURRENT LED DRIVER WITH DIMMING


### -RD 2-Wire 0-10V CCR Dimming Scheme

Parameters	Minimum	Typical	Maximum
Source Current out of 0-10V Purple Wire	0mA	—	2mA
Absolute Voltage Range on 0-10V (+) Purple Wire	-2.0V	—	+15V
Sink Current into 0-10V Purple Wire	0mA	—	1.2mA


### Notes

1. -RD 0-10V dimmable version comes with an extra two wires +Purple/-Grey on the output side.
2. -RD version is compatible with most 0-10V Wall Slide dimmers and direct 0-10V analog signal. Recommended wall slide dimmer is Leviton IP710 or equivalent
3. -RD 0-10V dimmable version is not intended to dim below about 5% @ 0V or 10% @ 1.0V
4. -RD 0-10V dimmable version output will be 100% with Purple/Grey open and minimum with Purple/Grey Shorted.


### -RD 2-Wire Resistance Dimming Scheme

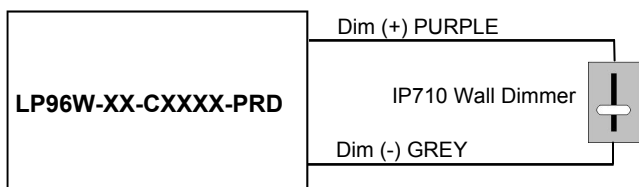

### -RD 2-Wire 0-10V Analog Dimming Scheme

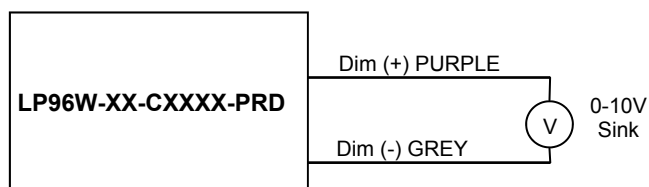

**% Output Current vs. 0-10VDC Dimming Input**

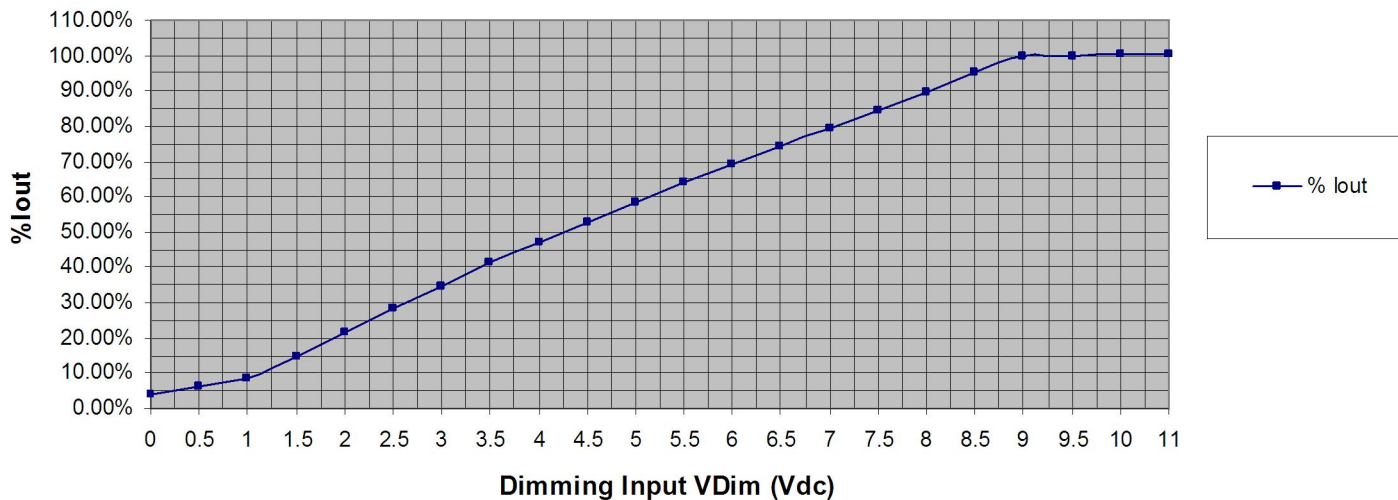

## 96 Watt - LP96W Series

CONSTANT VOLTAGE OR CONSTANT CURRENT LED DRIVER WITH DIMMING


### -PD 2-Wire CCR PWM Positive Dimming Scheme

Parameters	Minimum	Typical	Maximum
Absolute Maximum Voltage Range on PWM Input (Purple Wire)	-2.0V	10V	+15V
Input LOW Level Voltage Range (Purple Wire)	-2.0V	0V	+5.5V
Input HIGH Level Voltage Range (Purple Wire)	+9.0V	10V	+15V
Current into PWM Input (Purple Wire)	0mA	—	1.2mA
Source Current out of PWM Input (Purple Wire)	0mA	—	2mA
PWM Input Signal Frequency	500Hz	—	1500Hz
PWM Input Signal Positive Duty Cycle	0%	10-90%	100%


### Notes

1. -PD PWM Dimmable version comes with an extra 2 wires +Purple/-Grey on the output side.
2. -PD PWM Dimmable version is not intended to dim below about 5% @ 0% Duty Cycle or 10% @ 10% Duty Cycle
3. -PD PWM dimmable version output will be 100% with Purple/Grey open and minimum with Purple/Grey Shorted.

### -PD 2-Wire PWM Positive Dimming Scheme

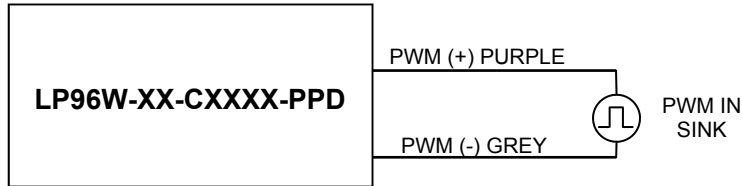

**% Output Current vs. 1.0 kHz, Positive Duty Cycle Dimming Input**

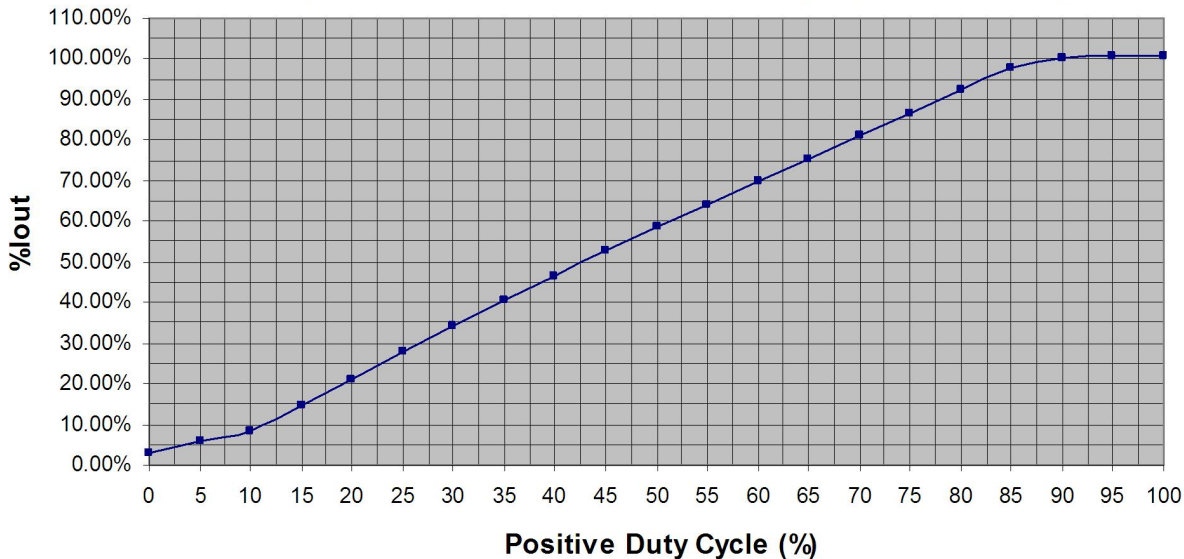



# 96 Watt - LP96W Series

CONSTANT VOLTAGE OR CONSTANT CURRENT LED DRIVER WITH DIMMING

## Input Specifications

Parameter	Min.	Typ.	Max.	Notes/Conditions
Input Voltage	90 Vac	—	305 Vac	120, 230, 240, 277 Vac Nominal Values
Input Frequency	47 Hz	—	63 Hz	50/60Hz Nominal
Input AC Current	—	—	0.92 A	Measured at 120Vac/60Hz Input, Output Full load.
	—	—	0.48 A	Measured at 230Vac/60Hz Input, Output Full load.
Inrush Current (Peak)	—	42A	50A	Measured at 277Vac/60Hz Input, Output Full Load, Ta 25°C, Cold Start 50% I <sub>peak</sub> duration $\approx$ 750 $\mu$ sec (1/2*I <sub>p</sub> <sup>2</sup> *t)
Inrush Current (I <sup>2</sup> t)	—	—	0.94 A <sup>2</sup> s	
Leakage Current	—	—	0.28mA	Measured at 120Vac/60Hz Input, Output Full load.
	—	—	0.78mA	Measured at 277Vac/60Hz Input, Output Full load.
THD	—	—	20%	Measured at 120, 230, 277Vac Input, Output $\geq$ 60% Load
Power Factor (PF)	0.90	—	—	Measured at 120, 230, 277Vac Input, Output $\geq$ 60% Load

## Output Specifications

Parameter	Min.	Typ.	Max.	Notes/Conditions
DC Output Voltage	Per Table	—	Per Table	Per Tables on Page 2 & 3
DC Output Constant Current	-3%	Per Table	+3%	Per Tables on Page 2 & 3
Output Power	—	—	Per Table	Per Tables on Page 2 & 3
Ripple & Noise (V <sub>pk-pk</sub> )	—	—	5% V <sub>o</sub>	20 MHz BW, Full load output in parallel with 0.1 $\mu$ F ceramic & 10 $\mu$ F Electrolytic.
Ripple (I <sub>pk-pk</sub> )	—	—	5% I <sub>o</sub>	20 MHz BW, Full load output in parallel with 0.1 $\mu$ F ceramic & 10 $\mu$ F Electrolytic. 120 Hz component (Flicker Free)
Start-up Time	—	200 mS	500 mS	Measured at 120Vac/60Hz Input, Output Full load.
Hold-up Time	—	40 mS	—	Typical @ 277Vac Input, Output Full load.

## Environmental Specifications

Parameter	Min.	Typ.	Max.	Notes/Conditions
Case Temperature (T <sub>c</sub> )	-30 °C	—	+90 °C	Measured at location specified on case.
Operating Temperature (T <sub>a</sub> )	-30 °C	—	+60 °C	This is a reference range. T <sub>c</sub> controls temperature range.
Storage Temperature (T <sub>s</sub> )	-40 °C	—	+85 °C	Non operating temperature range.
Operating Humidity	—	—	95% RH	Relative Humidity, non-condensing.
Vibration	5 Hz	—	55 Hz	2G, 10 minutes/1 cycle, period 30 minutes, each along X, Y, Z axis.
MTBF	474,000 Hours	—	—	MIL-HDBK-217F Notice 2, T <sub>a</sub> = 25C, Output Full Load.

## Protection Specifications

Parameter	Min.	Typ.	Max.	Notes/Conditions
Output Short Circuit (SCP)	—	—	—	No Damage, Auto recovery after short is removed.
Output Over Current (OCP)	—	—	+8% I <sub>o</sub>	Constant Current Limiting circuit.
Output Over Voltage (OVP)	—	—	120% V <sub>o</sub>	No Damage, Auto recovery after fault is removed.

## 96 Watt - LP96W Series

CONSTANT VOLTAGE OR CONSTANT CURRENT LED DRIVER WITH DIMMING

### Safety Certification


Safety	Notes/Standards
UL Class P UL/CUL Listed	UL8750 & CAN/CSA C22.2 No. 250.13, UL Class P, UL Type HL
UL Type TL UL/CUL Recognized	UL8750, UL1310 for UL Class 2 & CAN/CSA C22.2 No. 250.13, UL Type HL & UL Type TL UL Class 2 83/54°C, UL Non-Class 2 90/75°C
CE	EN61347-1, EN61347-2-13
Withstand Voltage	Input to Output: 3750 Vac. Parts use a GDT. Hipot cannot be done with Case or GND connected.
Isolation Resistance	Input to Output: >100 MΩ, 500VDC @ 25 °C, 70 % RH
Dimming Circuit	Dim+ Purple/Dim- Grey are considered part of the secondary circuit.

### EMC Certification

Standard	Notes/Conditions
FCC, 47CFR Part 15	Class B
EN 55015	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment.
EN 61000-3-2	Part 3-2: Limits for harmonic current emissions Class C, ≥80% Rated Power
EN 61000-3-3	Part 3-3: Limitation of voltage changes, voltage fluctuations and flicker.
EN 61000-4-5	Part 4-5: Surge Immunity test, 2kV L-N, 4kV L-FG & N-FG
Energy Star	Energy Star transient protection: Ballast or driver shall comply with ANSI/IEEE C62.41.1-2002 and ANSI/IEEE C62.41.2-2002, Category A operation. The line transient shall consist of seven strikes of a 100 kHz ring wave, 2.5 kV level, for both common mode and differential mode.

### Power Factor Curves (Typical)

PF vs. Output Power

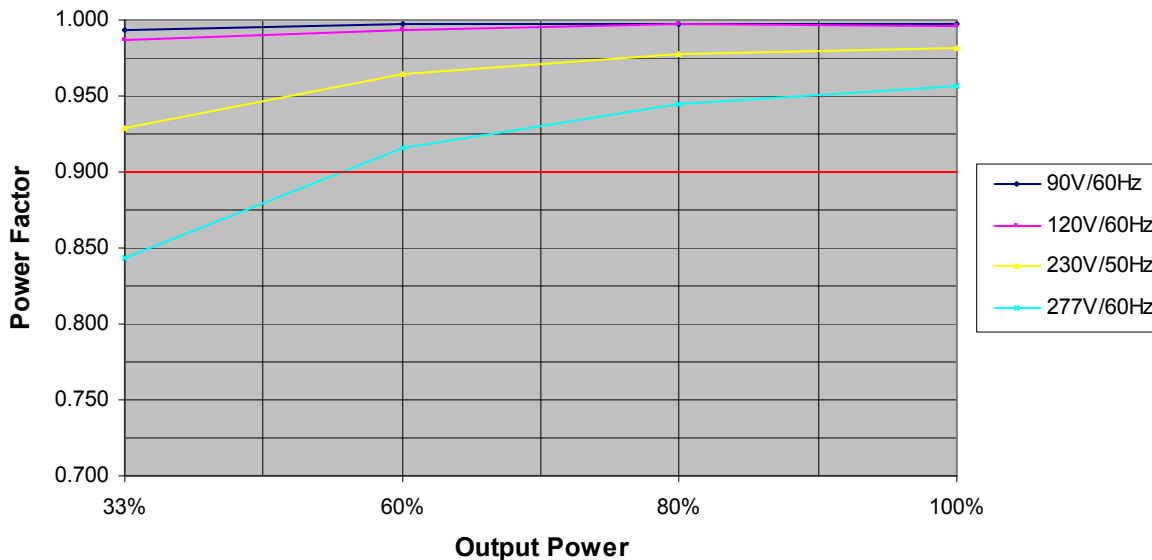

96W

LP96W Series

DIMMING




LED Optimized Drivers

# 96 Watt - LP96W Series

CONSTANT VOLTAGE OR CONSTANT CURRENT LED DRIVER WITH DIMMING


## THD Curves (Typical)

### THD vs. Output Power

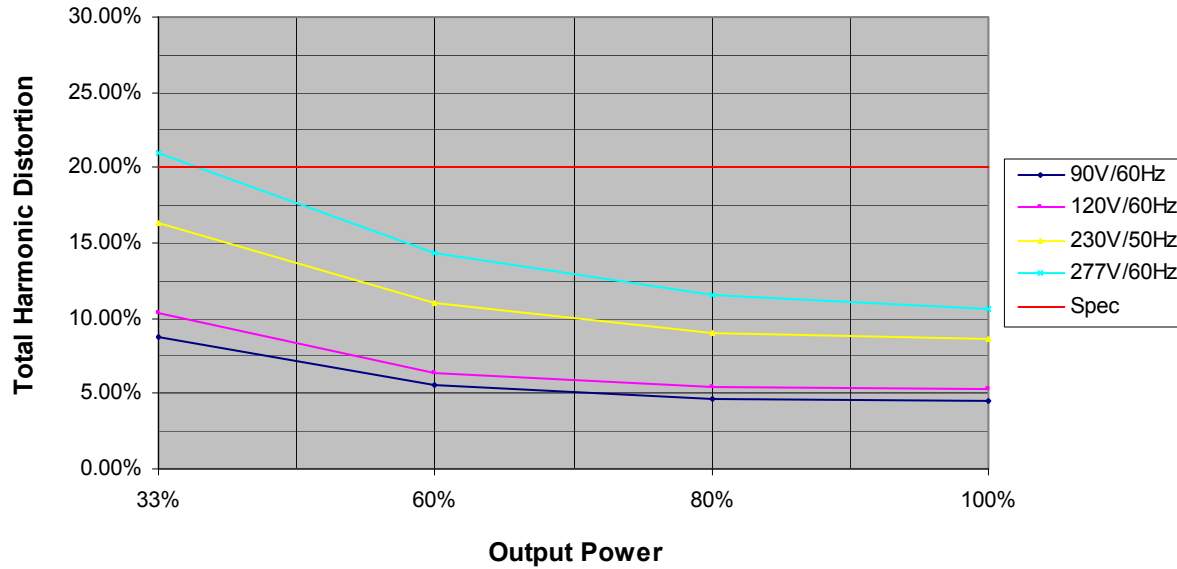

## Efficiency Curve (Typical)

### Efficiency vs. Output Power

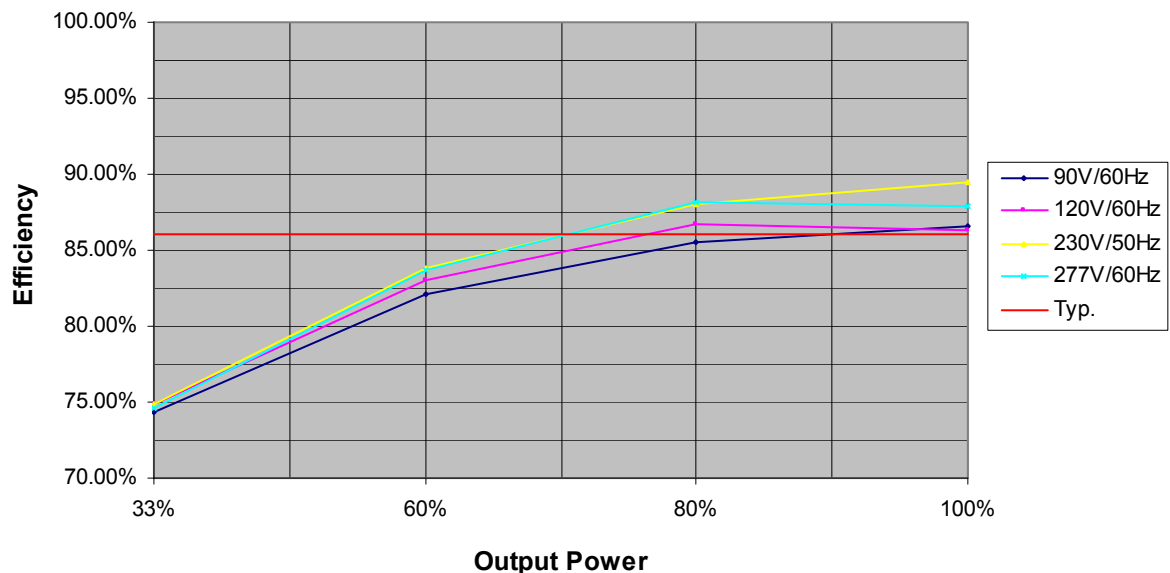




# 96 Watt - LP96W Series

CONSTANT VOLTAGE OR CONSTANT CURRENT LED DRIVER WITH DIMMING


## Life vs. Ambient Temperature

LP96W Estimated Life Full Load @ 120Vac

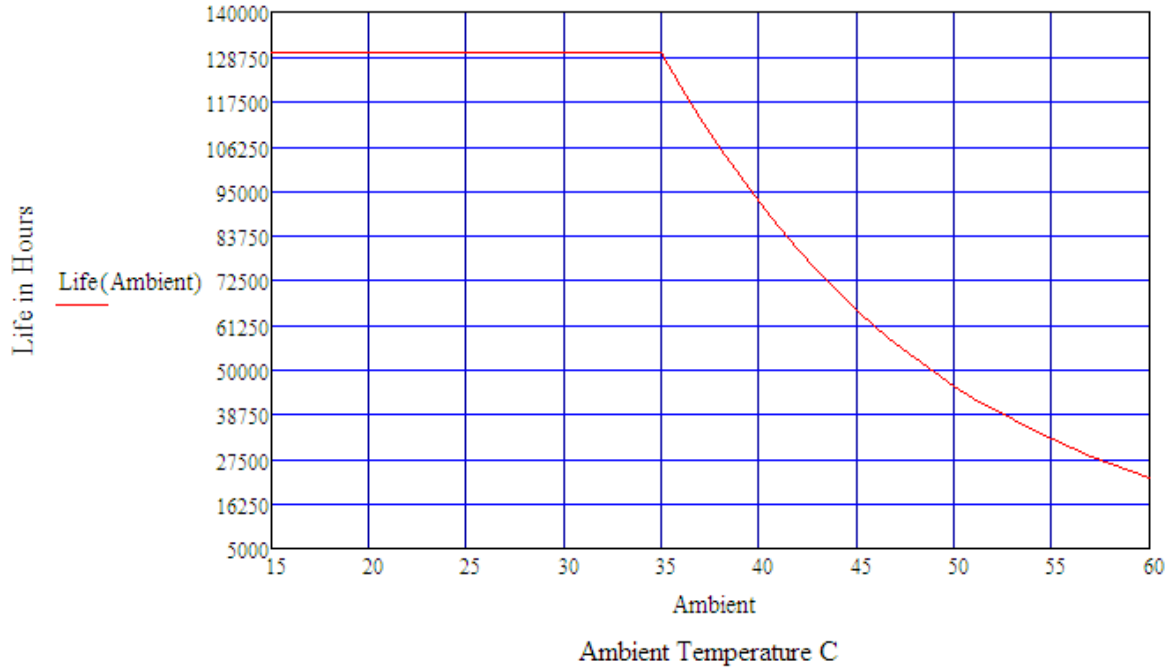

## Life vs. Case (Tc) Temperature

LP96W Estimated Life Full Load @ 120Vac

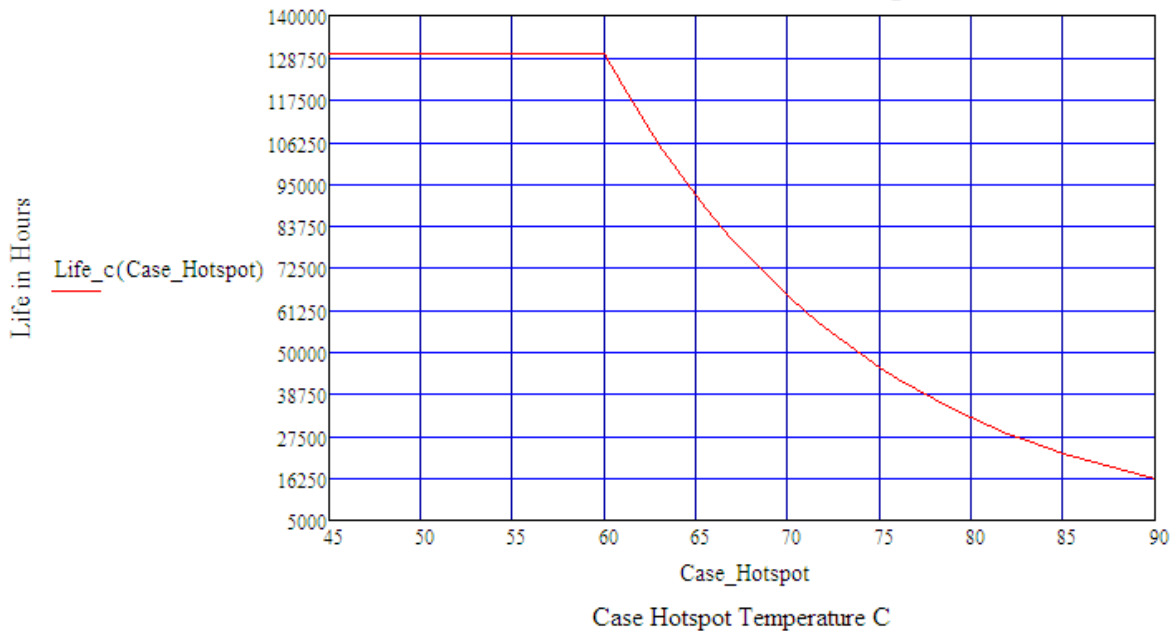

96W

LP96W Series

DIMMING



LED Optimized Drivers

## 96 Watt - LP96W Series

CONSTANT VOLTAGE OR CONSTANT CURRENT LED DRIVER WITH DIMMING

